

**IN THE UNITED STATES DISTRICT COURT
FOR THE EASTERN DISTRICT OF TEXAS
TYLER DIVISION**

GEMALTO S.A.,	§	
	§	
Plaintiff,	§	
v.	§	Civil Action No. 6:10-cv-561
	§	
HTC CORPORATION, HTC AMERICA,	§	JURY TRIAL DEMANDED
INC., EXEDEA, INC., SAMSUNG	§	
ELECTRONICS CO., LTD., SAMSUNG	§	
TELECOMMUNICATIONS AMERICA	§	
LLC, MOTOROLA, INC., and	§	
GOOGLE INC.,	§	
	§	
Defendants.	§	
	§	

COMPLAINT FOR PATENT INFRINGEMENT

Plaintiff Gemalto S.A. files this Complaint of patent infringement and states as follows:

THE PARTIES

1. Gemalto S.A. is a corporation organized and existing under the laws of France with a principal place of business at 6 rue de la verrerie, 92197 Meudon Cedex, France and, together with its affiliated company in the United States, Gemalto, Inc., (collectively, “Gemalto”) maintains a research and development center at Arboretum Plaza II, 9442 Capital of Texas Highway North, Suite 400, Austin, Texas.

2. Gemalto is the global leader in digital security. More than one billion people worldwide use its products and services for telecommunications, financial services, e-government, identity and access management, multimedia content, digital rights management, IT security, mass transit and many other applications. Gemalto has a long tradition of innovation and invests heavily in research and development. One such innovation is Gemalto’s Java Card

Technology, which was developed at its Texas research and development center. Among other things, this pioneering and ground-breaking technology, protected by United States Patent Nos. 6,308,317, 7,117,485, and 7,818,727 (collectively, the “Patents-in-Suit”), enables Java applications and applications developed in other high level programming languages to run on resource-constrained and other devices, including devices such as smart cards and mobile phones.

GOOGLE

3. Upon information and belief, Defendant Google Inc. (“Google”) is a Delaware corporation with its principal place of business at 1600 Amphitheatre Parkway, Mountain View, California. In addition, Google maintains an office in Austin, Texas and is also qualified to do business in Texas.

4. Google develops and actively distributes what it refers to as the Android Platform to application developers and device manufacturers, including the other named Defendants in this action. The Android Platform is an essential part of Google’s business strategy to extend its online presence, including its core advertising business, to next generation computing devices. The Android Platform includes a software development kit (“Android SDK”) for developing Android applications that incorporates Gemalto’s patented Java Card Technology (“Android Applications”) without its permission and an operating system (“Android Operating System”) featuring the Dalvik virtual machine (“Dalvik VM”). The Dalvik VM allows Android Applications developed with the Android SDK to run on resource-constrained devices that use the Android Operating System, including devices having computing and memory resources more limited than desktop computers. The Dalvik VM was designed without Gemalto’s permission

using Gemalto's Java Card Technology and uses that technology to execute Android Applications.

5. In addition, Google provides device manufacturers with Android Applications that it develops using Gemalto's Java Card Technology. Such applications include Google Talk, Google Maps, Google Voice, Google Calendar, Google Email—"Gmail," Google Finance, Google Contacts, Google Shopper, among others.

6. Furthermore, Google makes, uses, offers to sell and/or sells devices incorporating the Android Operating System ("Android Devices") and the Dalvik VM to run Android Applications, including mobile phones sold under the tradename Nexus One.

7. Google has sought to leverage the existing community of Java programmers and application developers in other high level programming languages and encourages them to develop Android Applications by, for example, distributing the Android Platform for free, offering millions of dollars in prizes for the best Android Applications and providing an "Android Market" through which Android Application developers can distribute and sell their applications to end-users.

HTC

8. Upon information and belief, Defendant HTC Corporation is a Taiwanese corporation with its principal place of business at 23 Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

9. Upon information and belief, Defendant HTC America, Inc., is a subsidiary of Defendant HTC Corporation. HTC America, Inc. is a Texas corporation with a principal place of business at 13920 SE Eastgate Way, Suite 400, Bellevue, Washington. In addition, HTC America, Inc. has an office in Houston, Texas and is qualified to do business in Texas.

10. Upon information and belief, Defendant Exedea, Inc., an affiliated company of HTC Corporation, is incorporated under the laws of the State of Texas with its principal place of business at 5950 Corporate Drive, Houston, Texas. Defendants HTC Corporation, HTC America, Inc., and Exedea, Inc. are collectively referred to herein as “HTC.”

11. HTC makes, uses, sells and offers to sell Android Devices having the Android Operating System and Android Applications, including mobile phones sold under the tradenames Evo 4G, Incredible, Hero, Desire and Dream.

SAMSUNG

12. Upon information and belief, Defendant Samsung Electronics Co., Ltd. is a Korean company with a principal place of business at 250, 2-ga, Taepyong-ro Jang-gu, Seoul 100-742 South Korea.

13. Upon information and belief, Defendant Samsung Telecommunications America, LLC is a subsidiary of Defendant Samsung Electronics Co. Ltd. Samsung Telecommunications America LLC is a Delaware corporation with a principal place of business at 1301 East Lookout Drive, Richardson, Texas. Samsung Telecommunications America is qualified to do business in Texas. Defendants Samsung Electronics Co. Ltd. and Samsung Telecommunications America, LLC are collectively referred to herein as “Samsung.”

14. Samsung makes, uses, sells and offers to sell Android Devices having the Android Operating System and Android Applications, including mobile phones sold under the tradenames Fascinate and Transform.

MOTOROLA

15. Upon information and belief, Defendant Motorola, Inc. (“Motorola”) is a Delaware corporation with its principal place of business at 1303 East Algonquin Road,

Schaumburg, Illinois. Motorola is qualified to do business in Texas and has one or more locations within Texas, including in Plano, Texas.

16. Motorola makes, uses, sells and offers to sell Android Devices having the Android Operating System and Android Applications, including mobile phones sold under the tradenames Devour, Droid, Droid Pro, Droid X and Droid 2.

17. Defendants have encouraged and supported the development of Android Applications and the use of the Android Operating System with the Dalvik VM, including by incorporating the Android Operating System and Android Applications in their Android Devices.

JURISDICTION AND VENUE

18. This is an action for patent infringement arising under the Patent Laws of the United States, United States Code, 35 U.S.C. § 271 *et seq.* This Court has subject matter jurisdiction over this action under Title 28, United States Code, §§ 1331 and 1338(a).

19. This Court has personal jurisdiction over each of the Defendants, including because each of the Defendants has conducted business, and continues to conduct business, within the State of Texas. In addition, Defendants, directly or through intermediaries (including distributors, retailers, and others) make, distribute, offer for sale, sell, advertise, and/or use their products in the State of Texas.

20. On information and belief, venue in this Judicial District is proper under Title 28, United States Code, §§ 1391 and 1400(b) because Defendants regularly conduct business in this judicial district, and the acts complained of herein occurred in this judicial district.

PATENTS-IN-SUIT

21. On October 23, 2001, the United States Patent and Trademark Office (“USPTO”) duly and legally issued United States Patent No. 6,308,317 (“the ’317 Patent”), entitled “Using a

High Level Programming Language with a Microcontroller.” The ’317 patent was the subject of a reexamination proceeding filed by Sun Microsystems, Inc. and its validity was reaffirmed by the USPTO. Gemalto holds all right, title, and interest in and to the ’317 Patent. A true and correct copy of the ’317 Patent is attached as Exhibit A.

22. On October 3, 2006, the USPTO duly and legally issued United States Patent No. 7,117,485 (“the ’485 Patent”), entitled “Using a High Level Programming Language with a Microcontroller.” Gemalto holds all right, title, and interest in and to the ’485 Patent. A true and correct copy of the ’485 Patent is attached as Exhibit B.

23. On October 19, 2010, the USPTO duly and legally issued United States Patent No. 7,818,727 (“the ’727 Patent”), entitled “Using a High Level Programming Language with a Microcontroller.” Gemalto holds all right, title, and interest in and to the ’727 Patent. A true and correct copy of the ’727 Patent is attached as Exhibit C.

24. Plaintiff Gemalto is the owner of the ’317, ’485, and ’727 patents and has the right to prevent others from making, having made, using, offering for sale or selling products or services covered by such patents, as well as the right to enforce the Patents-in-Suit against the Defendants who are using Gemalto’s Java Card Technology without permission.

25. Android Applications and the development of such applications using the Android SDK infringe one or more claims of the Patents-in-Suit.

26. The Android Devices provided by Defendants that incorporate the Android Operating System and Android Applications infringe one or more claims of the Patents-in-Suit.

27. On information and belief, Defendants have purposefully, actively and voluntarily distributed or sold Android Devices and/or the Android Platform, including the Android SDK, Android Operating System, and Android Applications, with the expectation that they will be

purchased, used or licensed by consumers in the Eastern District of Texas. The Android Platform and/or the Android Devices have been and continue to be purchased, used, and licensed by consumers in the Eastern District of Texas. Defendants have thus committed acts of patent infringement within the State of Texas, and particularly, within the Eastern District of Texas. By purposefully, actively, and voluntarily distributing one or more of their infringing products and services, Defendants have injured Gemalto and are thus liable to Gemalto for infringement of the Patents-in-Suit in this litigation pursuant to 35 U.S.C. § 271.

COUNT ONE – INFRINGEMENT OF U.S. PATENT 6,308,317

28. Gemalto incorporates by reference herein the averments set forth in paragraphs 1-27, above.

29. Defendants have been and are now directly infringing and/or indirectly infringing the '317 Patent by way of inducement and/or contributory infringement, literally and/or under the doctrine of equivalents, in this District, and elsewhere, in violation of 35 U.S.C. § 271, including by making, using, selling, and/or offering for sale in the United States or importing into the United States, one or more Android SDKs, Android Applications, Android Operating Systems and/or Android Devices covered by at least one claim of the '317 Patent. Google contributes to and induces the direct infringement of the '317 Patent by both Android Application developers and Android Device manufacturers, including the other named Defendants, including by distributing the Android SDK, Android Operating Systems, and Android Applications. All Defendants contribute to and induce the direct infringement of the '317 Patent by Android Application developers, including by incorporating the Android Operating System and Android Applications in their Android Devices.

30. Upon information and belief, at least Defendants Google and Samsung continue to infringe the '317 patent despite knowledge of the patent. Defendants' infringement has been and continues to be willful.

31. Gemalto has been irreparably harmed by the Defendants' acts of infringement of the '317 Patent, and will continue to be harmed unless and until Defendants' acts of infringement are enjoined by this Court. Gemalto has no adequate remedy at law to redress Defendants' continuing acts of infringement. The hardships that would be imposed upon Defendants by an injunction are less than those faced by Gemalto should an injunction not issue. Furthermore, the public interest would be served by issuance of an injunction.

32. As a result of Defendants' acts of infringement, Gemalto has suffered and will continue to suffer damages in an amount to be proved at trial.

COUNT TWO – INFRINGEMENT OF U.S. PATENT 7,117,485

33. Gemalto incorporates by reference herein the averments set forth in paragraphs 1-27, above.

34. Defendants have been and are now directly infringing and/or indirectly infringing the '485 Patent by way of inducement and/or contributory infringement, literally and/or under the doctrine of equivalents, in this District, and elsewhere, in violation of 35 U.S.C. § 271, including by making, using, selling, and/or offering for sale in the United States or importing into the United States, one or more Android SDKs, Android Applications, Android Operating Systems and/or Android Devices covered by at least one claim of the '485 Patent. Google contributes to and induces the direct infringement of the '485 Patent by both Android Application developers and Android Device manufacturers, including the other named Defendants, including by distributing the Android SDK, Android Operating Systems, and

Android Applications. All Defendants contribute to and induce the direct infringement of the '485 Patent by Android developers, including by incorporating the Android Operating System and Android Applications in their Android Devices.

35. Upon information and belief, at least Defendants Google and Samsung continue to infringe the '485 patent despite knowledge of the patent. Defendants' infringement has been and continues to be willful.

36. Gemalto has been irreparably harmed by the Defendants' acts of infringement of the '485 Patent, and will continue to be harmed unless and until Defendants' acts of infringement are enjoined by this Court. Gemalto has no adequate remedy at law to redress Defendants' continuing acts of infringement. The hardships that would be imposed upon Defendants by an injunction are less than those faced by Gemalto should an injunction not issue. Furthermore, the public interest would be served by issuance of an injunction.

37. As a result of Defendants' acts of infringement, Gemalto has suffered and will continue to suffer damages in an amount to be proved at trial.

COUNT THREE – INFRINGEMENT OF U.S. PATENT 7,818,727

38. Gemalto incorporates by reference herein the averments set forth in paragraphs 1-27, above.

39. Defendants have been and are now directly infringing and/or indirectly infringing the '727 Patent by way of inducement and/or contributory infringement, literally and/or under the doctrine of equivalents, in this District, and elsewhere, in violation of 35 U.S.C. § 271, including by making, using, selling, and/or offering for sale in the United States or importing into the United States, one or more Android SDKs, Android Applications, Android Operating Systems and/or Android Devices covered by at least one claim of the '727 Patent. Google

contributes to and induces the direct infringement of the '727 Patent by both Android Application developers and Android Device manufacturers, including the other named Defendants, including by distributing the Android SDK, Android Operating Systems, and Android Applications. All Defendants contribute to and induce the direct infringement of the '727 Patent by Android Application developers, including by incorporating the Android Operating System and Android Applications in their Android Devices.

40. Upon information and belief, at least Defendants Google and Samsung continue to infringe the '727 patent despite knowledge of the patent. Defendants' infringement has been and continues to be willful.

41. Gemalto has been irreparably harmed by the Defendants' acts of infringement of the '727 Patent, and will continue to be harmed unless and until Defendants' acts of infringement are enjoined by this Court. Gemalto has no adequate remedy at law to redress Defendants' continuing acts of infringement. The hardships that would be imposed upon Defendants by an injunction are less than those faced by Gemalto should an injunction not issue. Furthermore, the public interest would be served by issuance of an injunction.

42. As a result of Defendants' acts of infringement, Gemalto has suffered and will continue to suffer damages in an amount to be proved at trial.

DEMAND FOR JURY TRIAL

43. Pursuant to Rule 38 of the Federal Rules of Civil Procedure, Plaintiff hereby demands a trial by jury for all issues triable to a jury.

PRAYER FOR RELIEF

WHEREFORE, Gemalto requests a judgment:

A. That Defendants have infringed United States Patents Nos. 6,308,317, 7,117,485, and 7,818,727;

B. That United States Patent No. 6,308,317, 7,117,485, and 7,818,727 are valid and enforceable in law;

C. Awarding to Gemalto its damages caused by Defendants' infringement of United States Patents Nos. 6,308,317, 7,117,485, and 7,818,727, including an assessment of pre-judgment and post-judgment interest and costs;

D. Entering a permanent injunction against Defendants, their officers, agents, servants, employees, attorneys, all parent and subsidiary corporations and affiliates, their assigns and successors in interest, and those persons in active concert or participation with any of them who receive notice of the injunction, enjoining them from continuing acts of infringement of United States Patents Nos. 6,308,317, 7,117,485, and 7,818,727, including without limitation from continuing to make, use, sell and/or offer for sale in the United States or import into the United States the Android SDK, Android Applications and Android Devices;

E. That this is an exceptional case and awarding to Gemalto its costs, expenses and reasonable attorneys' fees pursuant to 35 U.S.C. § 285;

F. That this Court award Gemalto enhanced/treble damages to which it is entitled pursuant to 35 U.S.C. § 284; and

G. Awarding to Gemalto such other and further relief as this Court may deem just and proper.

Date: October 22, 2010

Respectfully submitted,

/s/ Sam Baxter

Sam Baxter
Texas State Bar No. 01938000
sbaxter@mckoolsmith.com
MCKOOL SMITH, P.C.
104 East Houston, Suite 300
Marshall, Texas 75670
Telephone: (903) 923-9000
Facsimile: (903) 923-9099

Robert A. Cote
rcote@mckoolsmith.com
Shahar Harel
sharel@mckoolsmith.com
Kevin Schubert
kschubert@mckoolsmith.com
MCKOOL SMITH, P.C.
One Bryant Park, 47th Floor
New York, New York 10036
Telephone: (212) 402-9400
Facsimile: (212) 402-9444

Peter J. Ayers
Texas State Bar No. 24009882
payers@mckoolsmith.com
Geoffrey L. Smith
Texas State Bar No. 24041939
gsmith@mckoolsmith.com
MCKOOL SMITH, P.C.
300 W. 6th St., Ste. 1700
Austin, Texas 78701
Telephone: (512) 692-8700
Facsimile: (512) 692-8744

**ATTORNEYS FOR PLAINTIFF
GEMALTO S.A.**



US006308317B1

(12) **United States Patent**
Wilkinson et al.

(10) **Patent No.:** **US 6,308,317 B1**
 (45) **Date of Patent:** **Oct. 23, 2001**

(54) **USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER**

(75) Inventors: **Timothy J. Wilkinson**, London (GB);
Scott B. Guthery, Belmont, MA (US);
Ksheerabdhhi Krishna; **Michael A. Montgomery**, both of Cedar Park, TX (US)

(73) Assignee: **Schlumberger Technologies, Inc.**,
 Austin, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **08/957,512**

(22) Filed: **Oct. 24, 1997**

Related U.S. Application Data

(60) Provisional application No. 60/029,057, filed on Oct. 25, 1996.

(51) **Int. Cl.**⁷ **G06F 13/00**

(52) **U.S. Cl.** **717/5**

(58) **Field of Search** 395/705; 717/5

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,256,955	3/1981	Giraud et al.	235/380
4,650,975	* 3/1987	Kitchener	235/375
4,777,355	10/1988	Takahira .	
4,797,543	1/1989	Watanabe	235/492
4,877,947	10/1989	Mori	235/381
5,064,999	11/1991	Okamoto et al.	235/379
5,195,130	3/1993	Weiss et al.	379/98
5,406,380	4/1995	Teter	358/332
5,500,517	* 3/1996	Cagliostro	235/486
5,537,474	* 7/1996	Brown et al.	380/23
5,544,086	8/1996	Davis et al.	364/408
5,550,919	8/1996	Kowalski	380/23
5,590,197	* 12/1996	Chen et al.	380/24
5,604,802	2/1997	Holloway	380/24
5,613,012	3/1997	Hoffman et al.	382/115
5,650,761	7/1997	Gomm et al.	235/381

5,689,565	11/1997	Spies et al.	380/25
5,692,132	11/1997	Hogan	395/227
5,734,150	3/1998	Brown et al.	235/381
5,742,756	* 4/1998	Dillaway et al.	713/200
5,761,306	6/1998	Lewis	380/21
5,768,419	6/1998	Gundlach et al.	395/187.01
5,811,771	9/1998	Dethloff	235/380
5,815,657	* 11/1998	Williams et al.	713/200
5,841,866	* 11/1998	Bruwer et al.	380/23
5,844,218	* 12/1998	Kawan et al.	235/380
5,889,941	* 3/1999	Tushie et al.	713/200
5,915,226	* 6/1999	Martineau	455/558
5,923,884	* 7/1999	Peyret et al.	395/712

FOREIGN PATENT DOCUMENTS

0 829 828 A1	3/1998	(EP) .
0889393 A2	1/1999	(EP) .
0 427 465 A2	5/1999	(EP) .
2 191 029 A	12/1987	(GB) .
2 261 973 A	6/1993	(GB) .
WO 98/19237	5/1998	(WO) .

OTHER PUBLICATIONS

Rodley, Writing Java Applets, Corolis Group Books, Chapter 1. Apr. 15, 1996.*
 Kung et al., Developing an Object-Oriented Software Testing and Maintainance Enviroment, Oct. 1995, pp. 75-87.*
 Cheng et al., Securing the Internet Protocol, Sep. 1995, p. 257.*

(List continued on next page.)

Primary Examiner—Mark R. Powell


Assistant Examiner—John Q. Chavis

(74) *Attorney, Agent, or Firm*—Pehr B. Jansson; Danita J. M. Maseles

(57) **ABSTRACT**

An integrated circuit card is used with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.

87 Claims, 23 Drawing Sheets

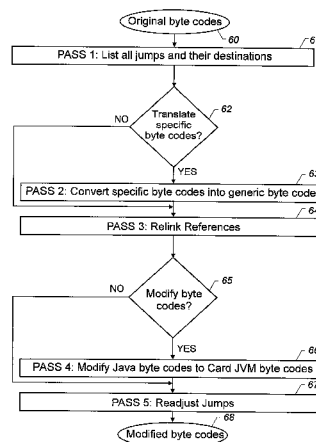

US 6,308,317 B1

Page 2

OTHER PUBLICATIONS

Sandhu et al., Authentication, Access Control, and Audit, Mar. 1996, pp. 241–243.*

Gosling, Audio/Video Sequence of Invited Presentations, May, 1996, pp. 1–4.*

Blundon, The Center of the universe is a database, Jul. 1996, pp. 1–5.*

Wingfield et al., News: Java Brews Trouble for Microsoft, Nov. 1995, pp. 1–2.*

0 427 465 A3—Examiner’s search report for 0 427 465 A2 May 15, 1991.

0 356 237 A3—Examiner’s search report for 0 356 237 A2 Feb.28, 1990.

PCT International Search Report dated Mar. 15, 1999.

PCT International Search Report, Dec. 29,1998, 7 pages.

PCT/US97/1899—Search Report.

* cited by examiner

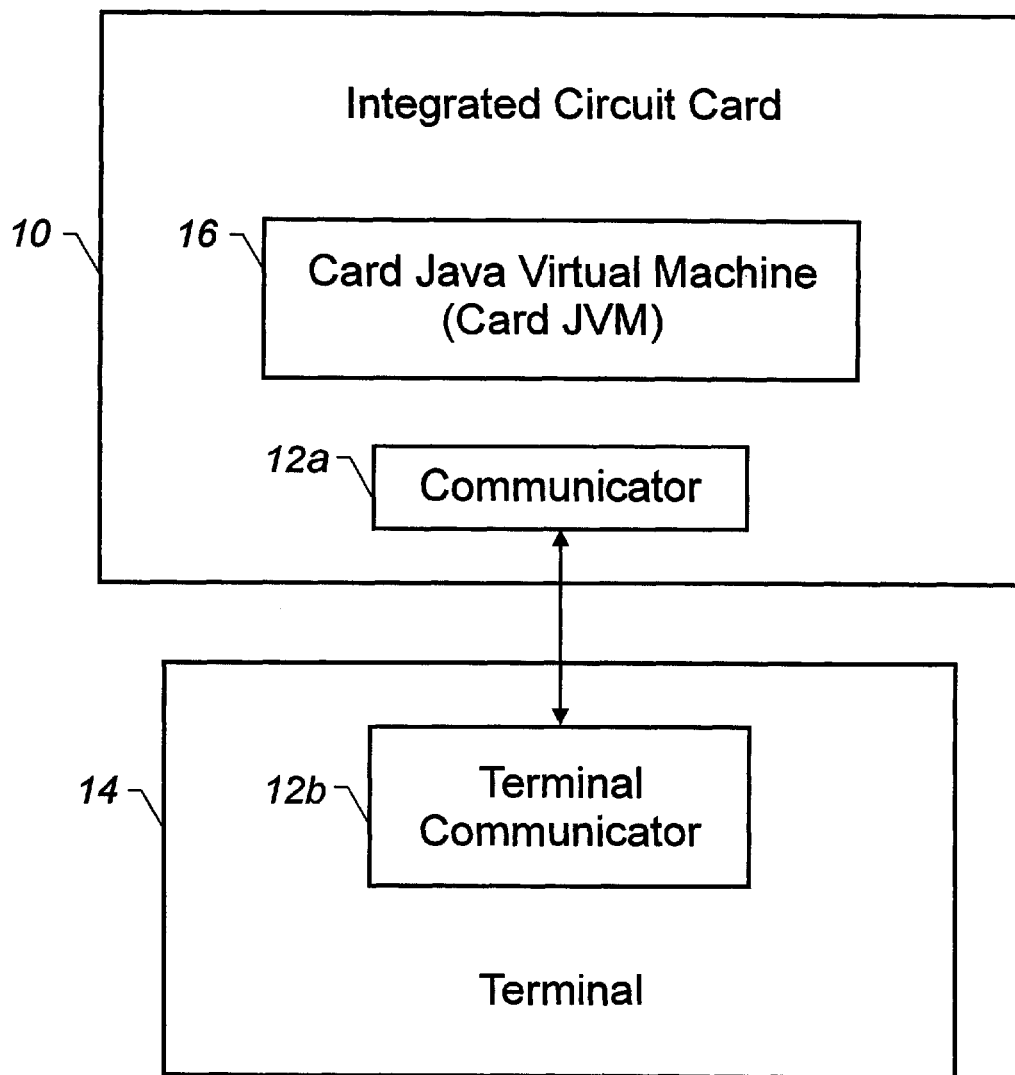


FIGURE 1

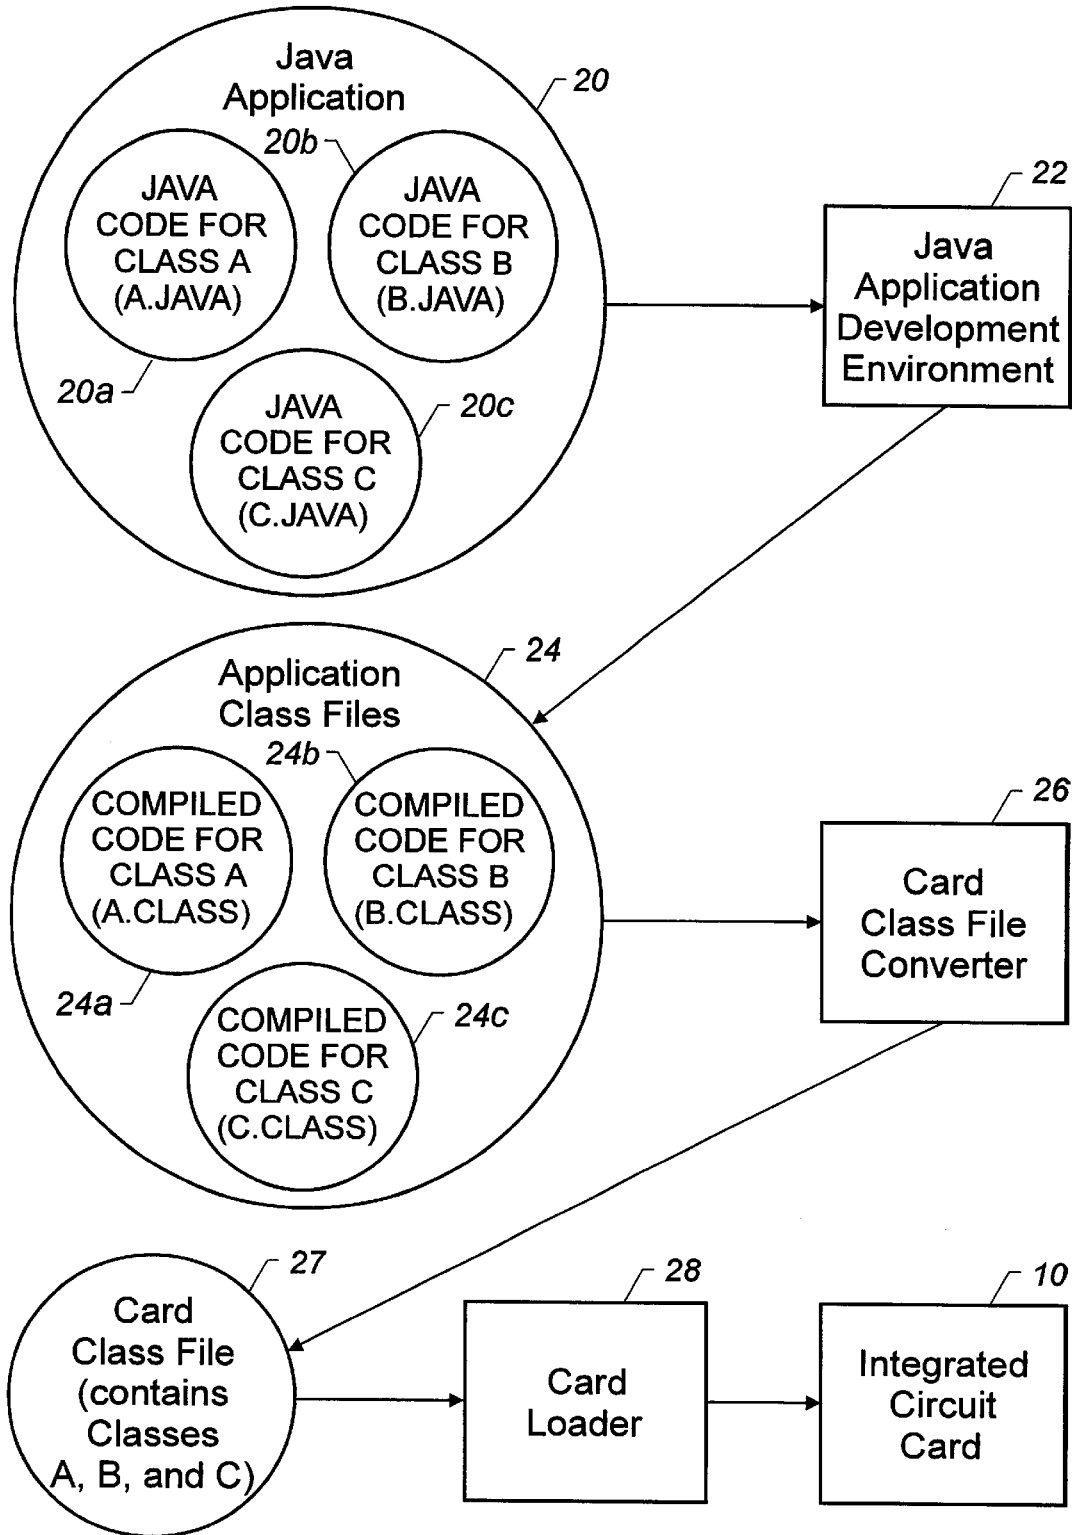


FIGURE 2

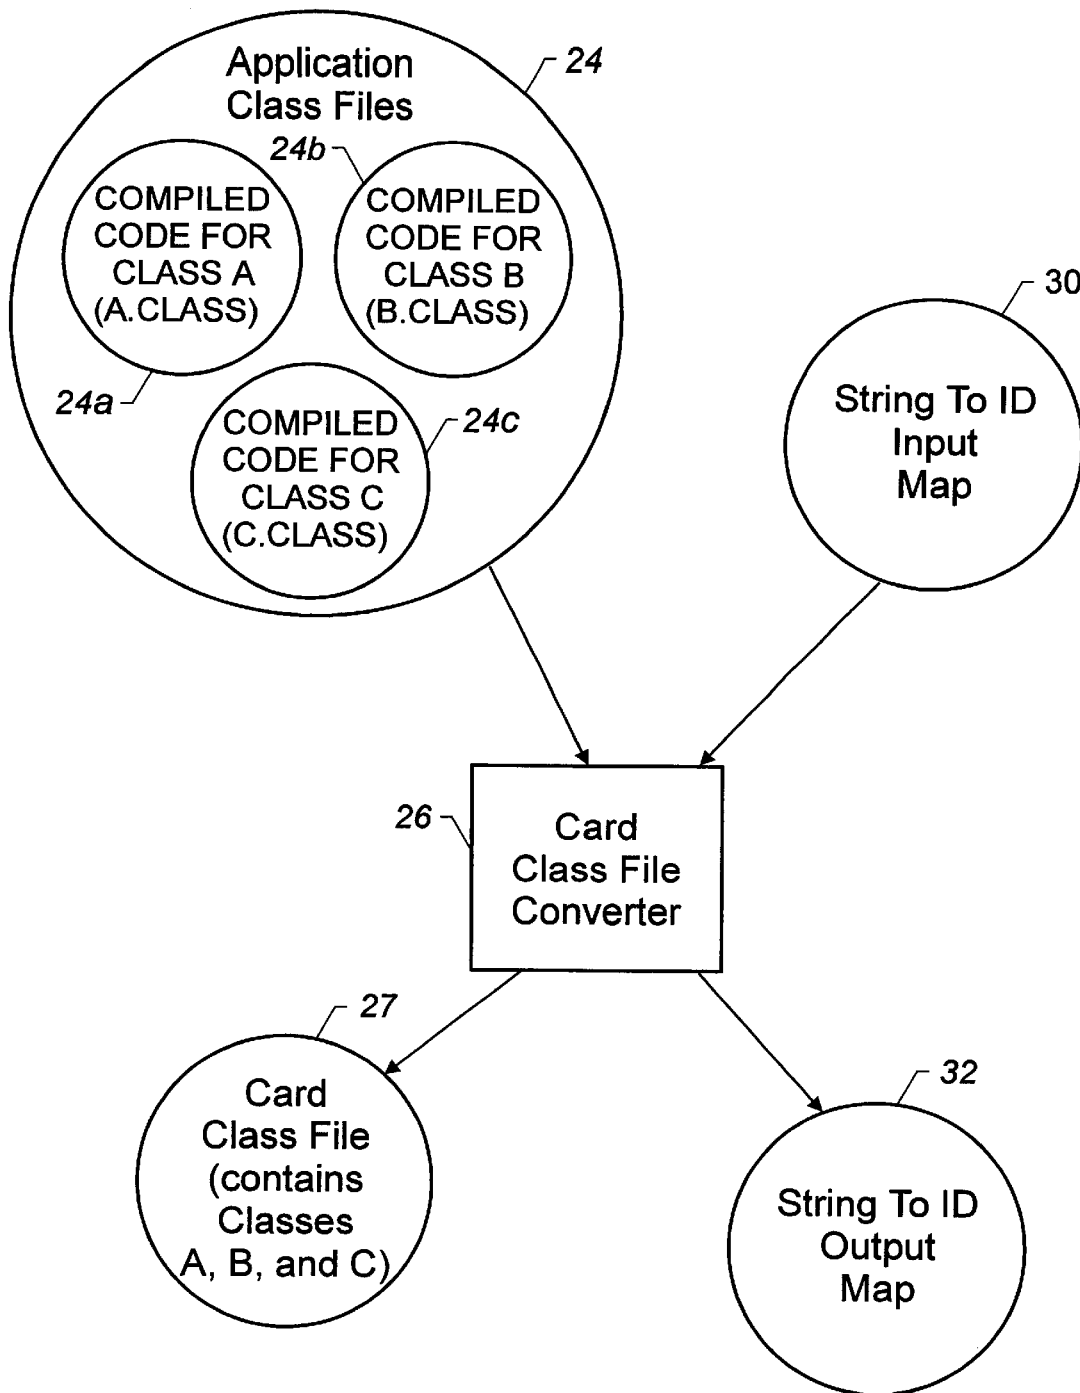


FIGURE 3

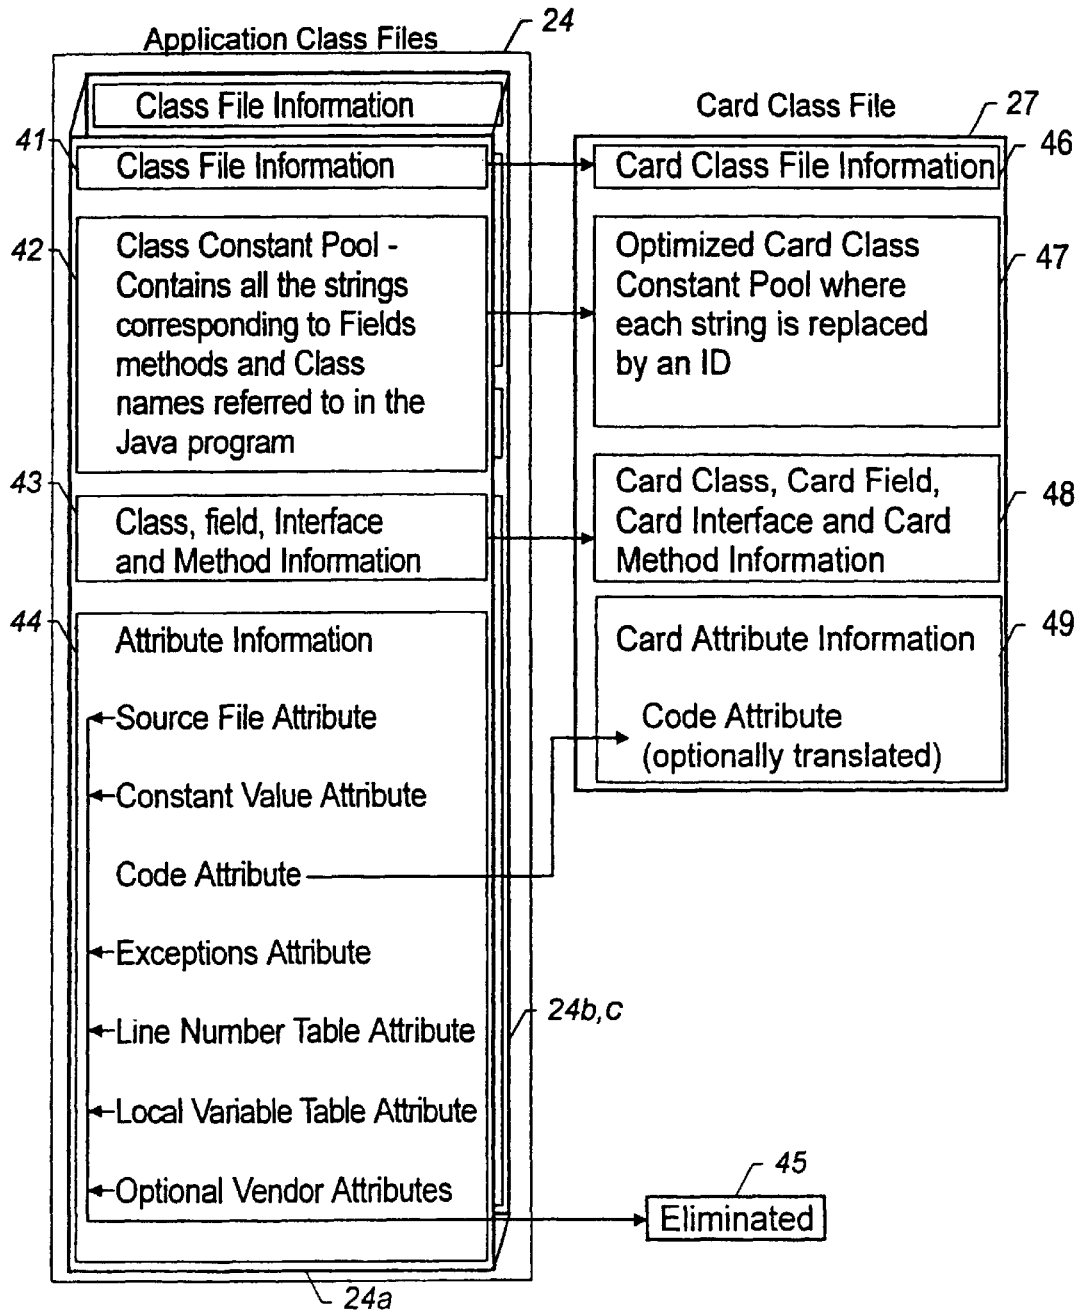


FIGURE 4

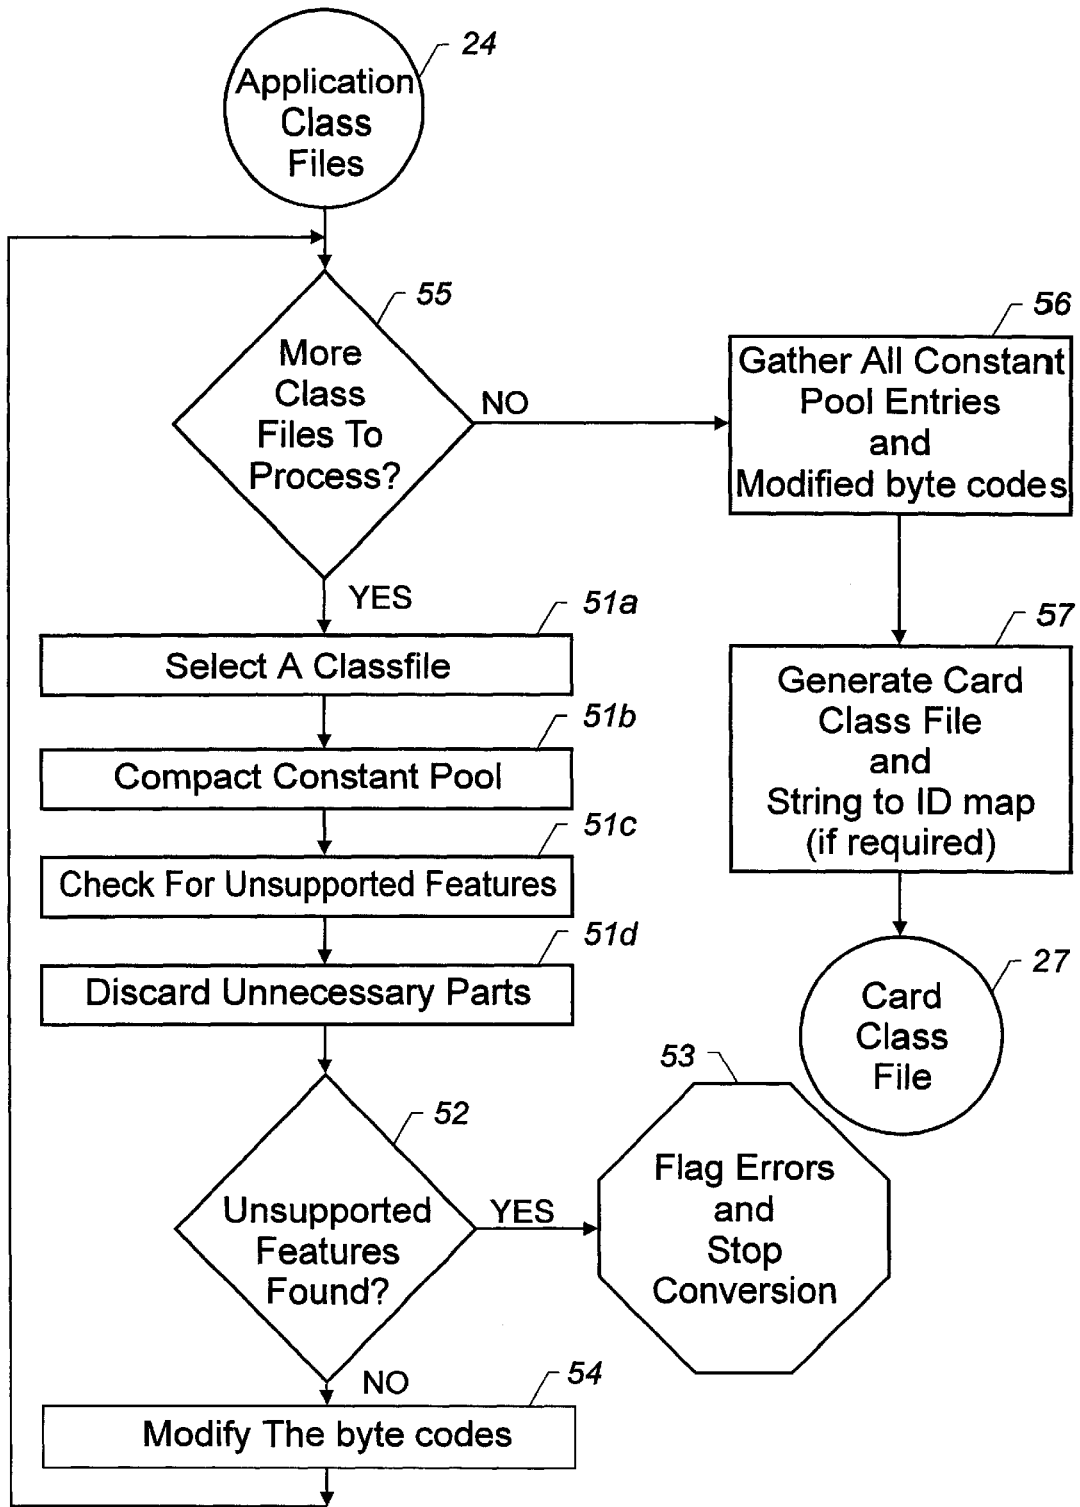


FIGURE 5

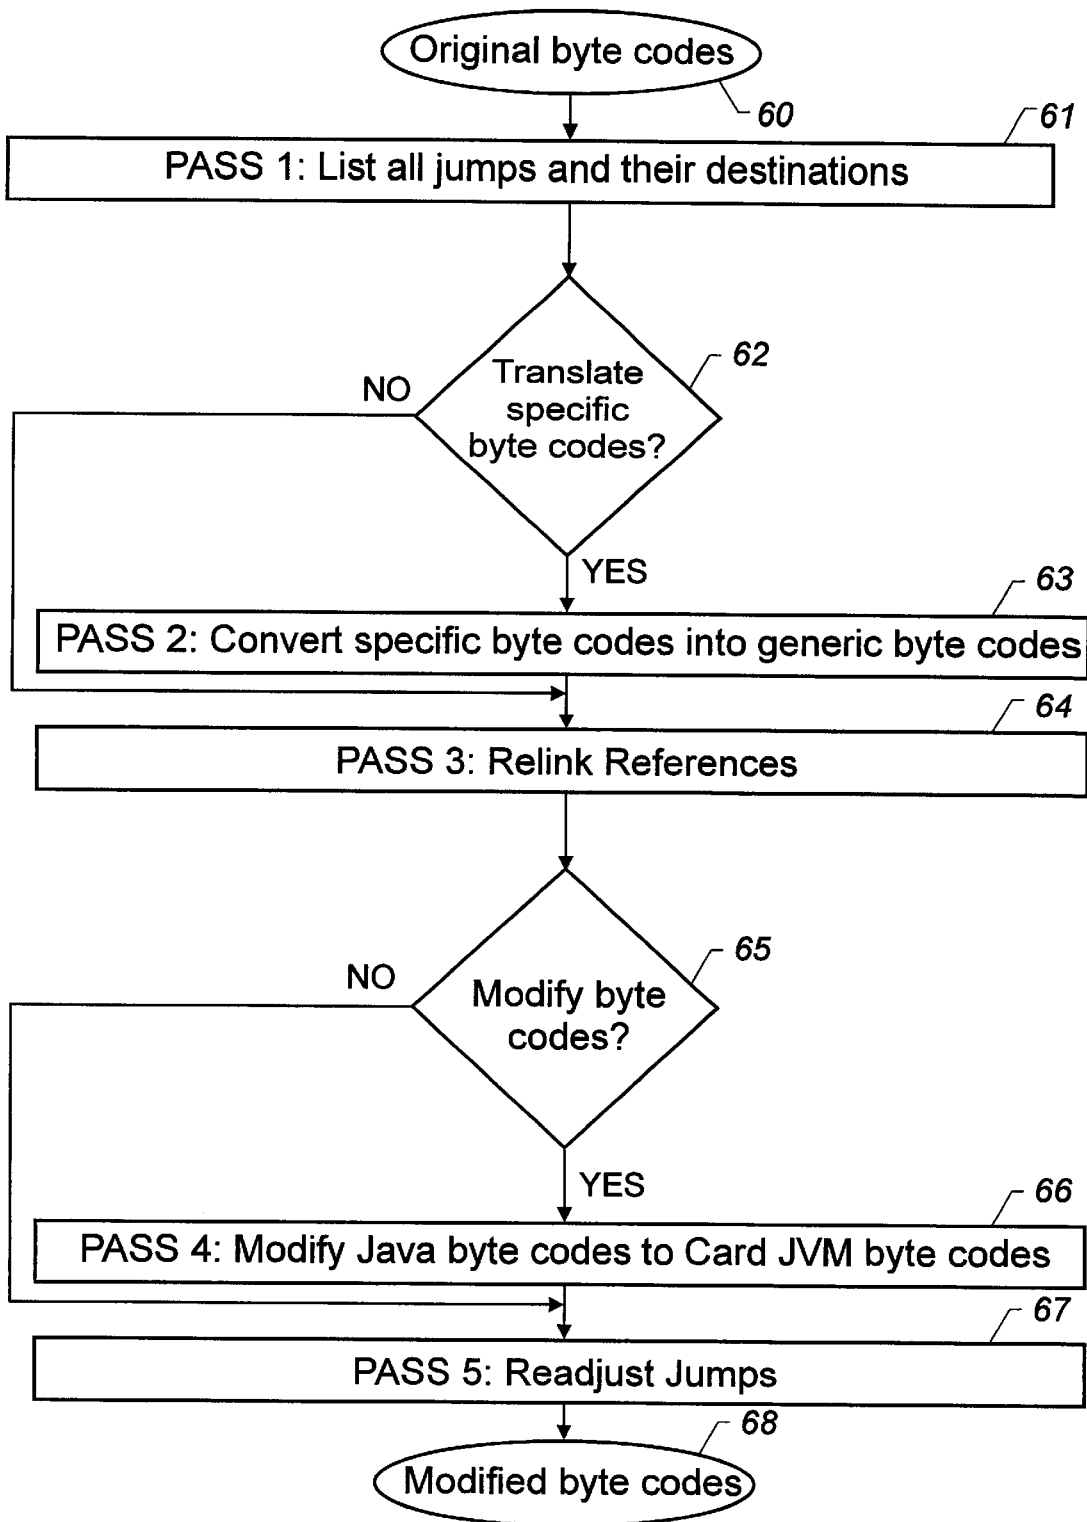


FIGURE 6

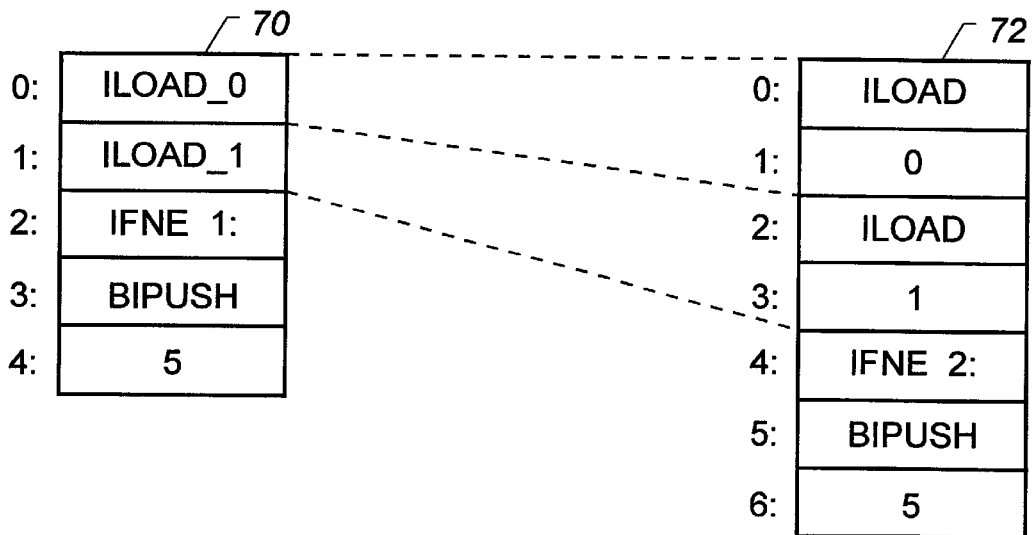


FIGURE 7

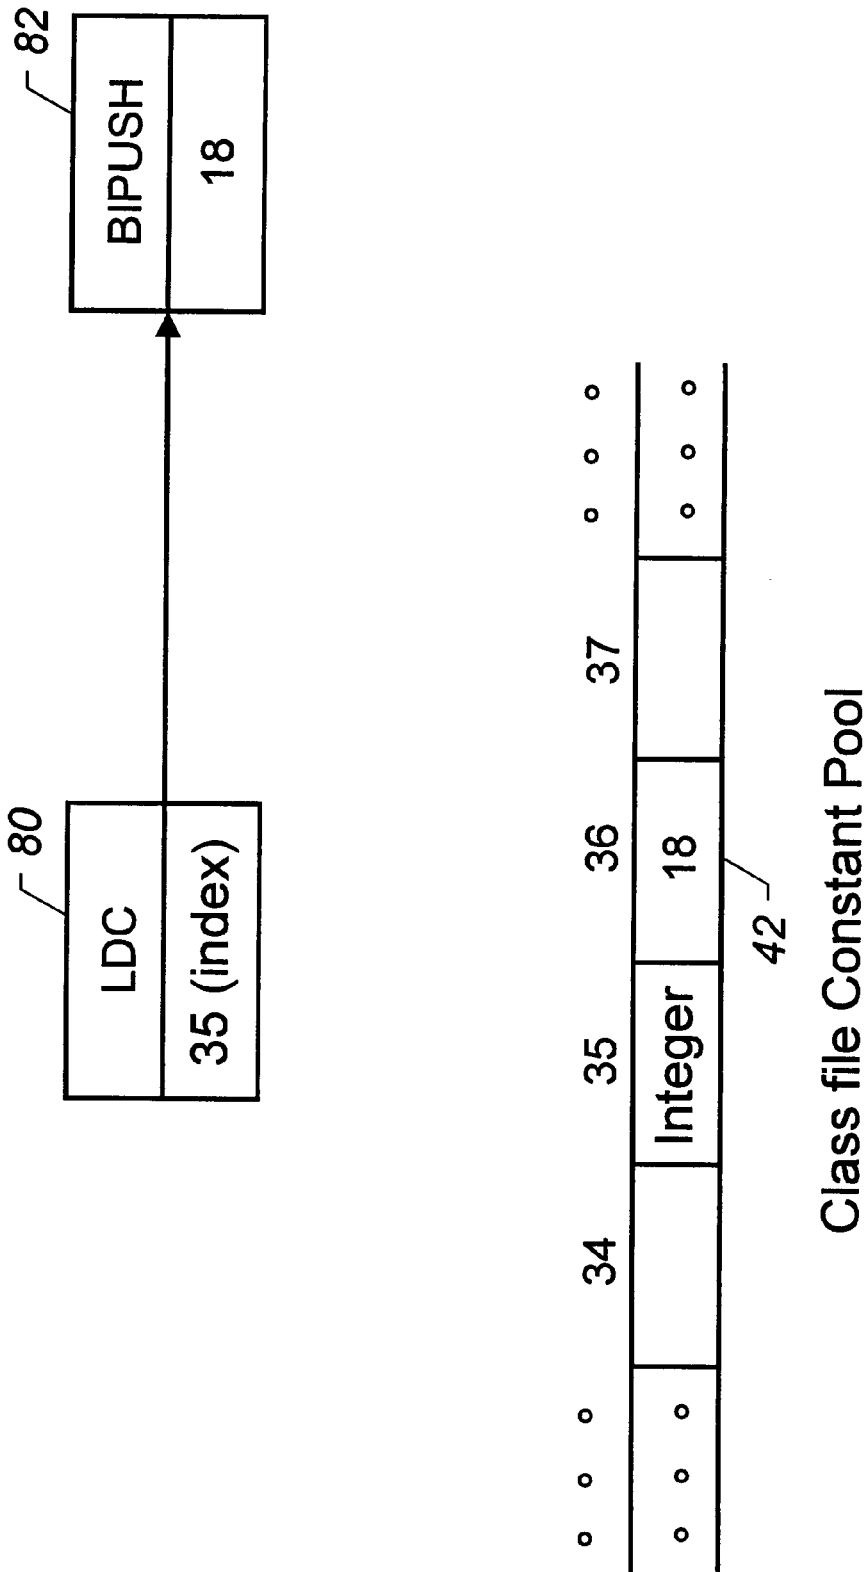


FIGURE 8

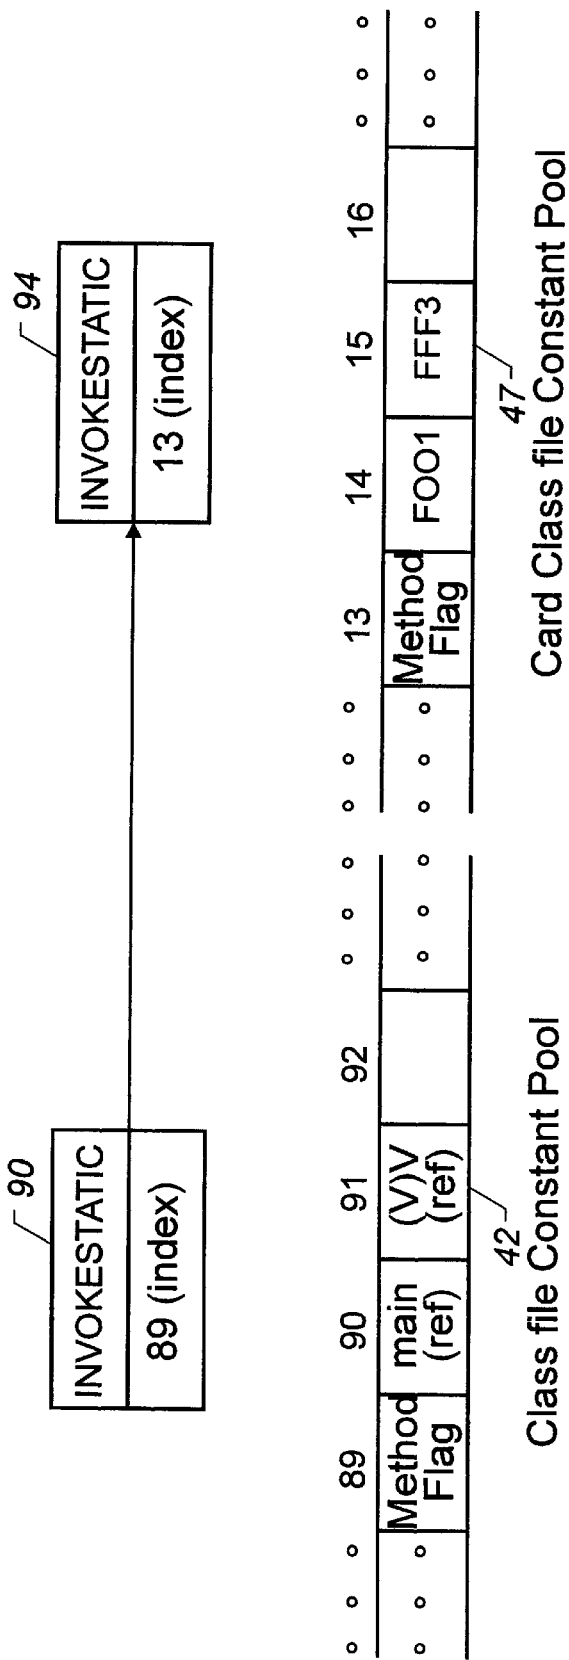


FIGURE 9



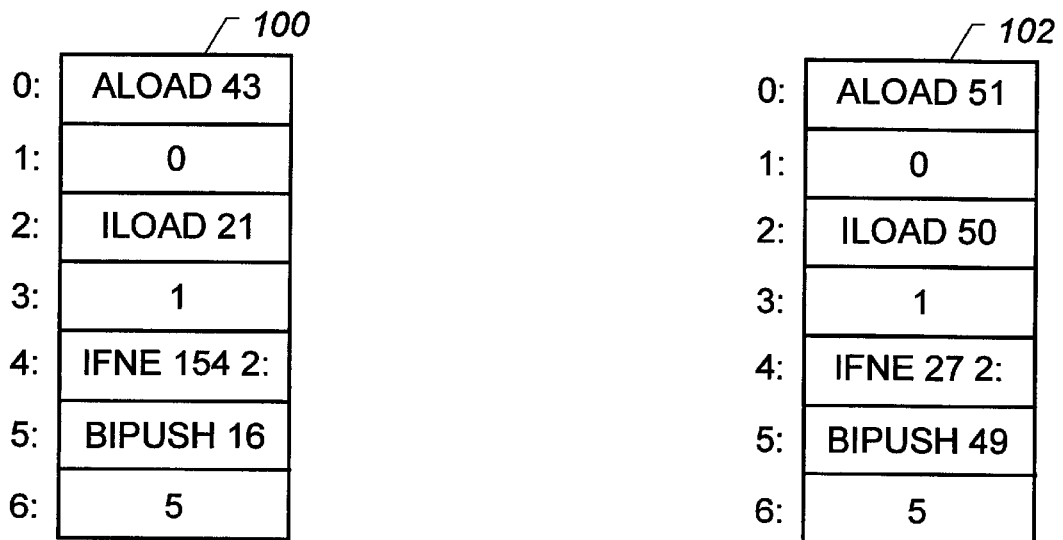


FIGURE 10

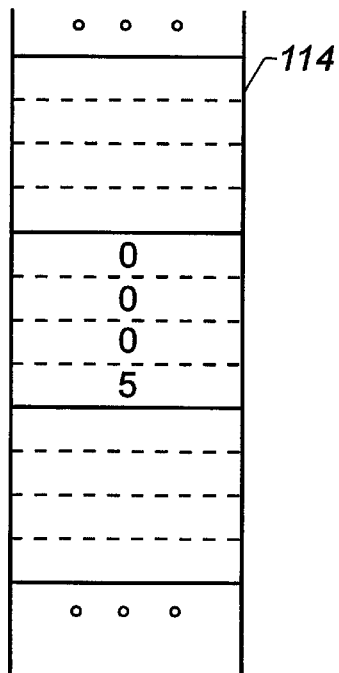

Word-Based Operand Stack

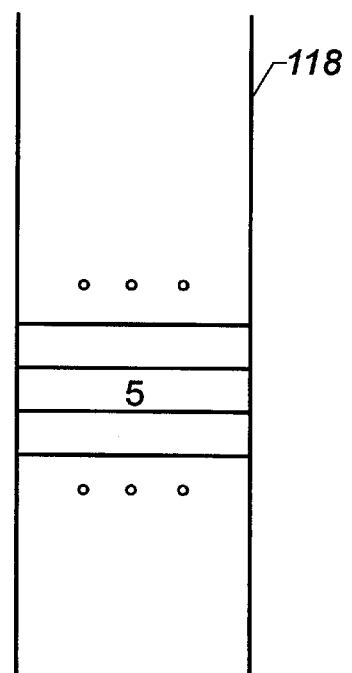

Byte-Based Operand Stack

FIGURE 11

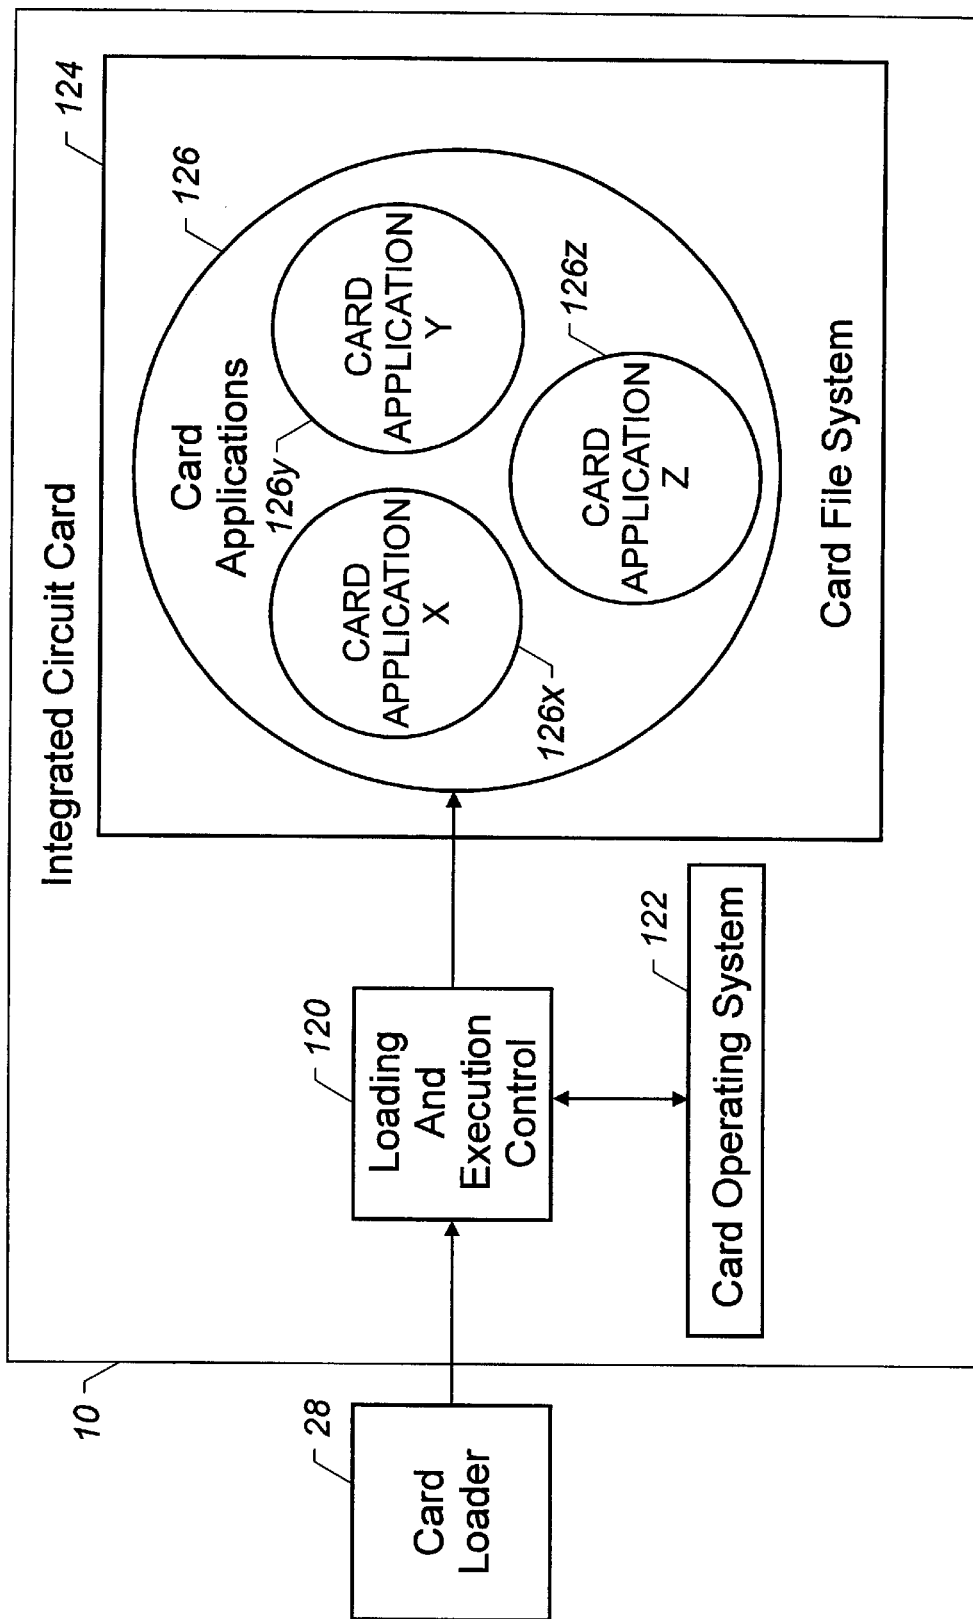


FIGURE 12

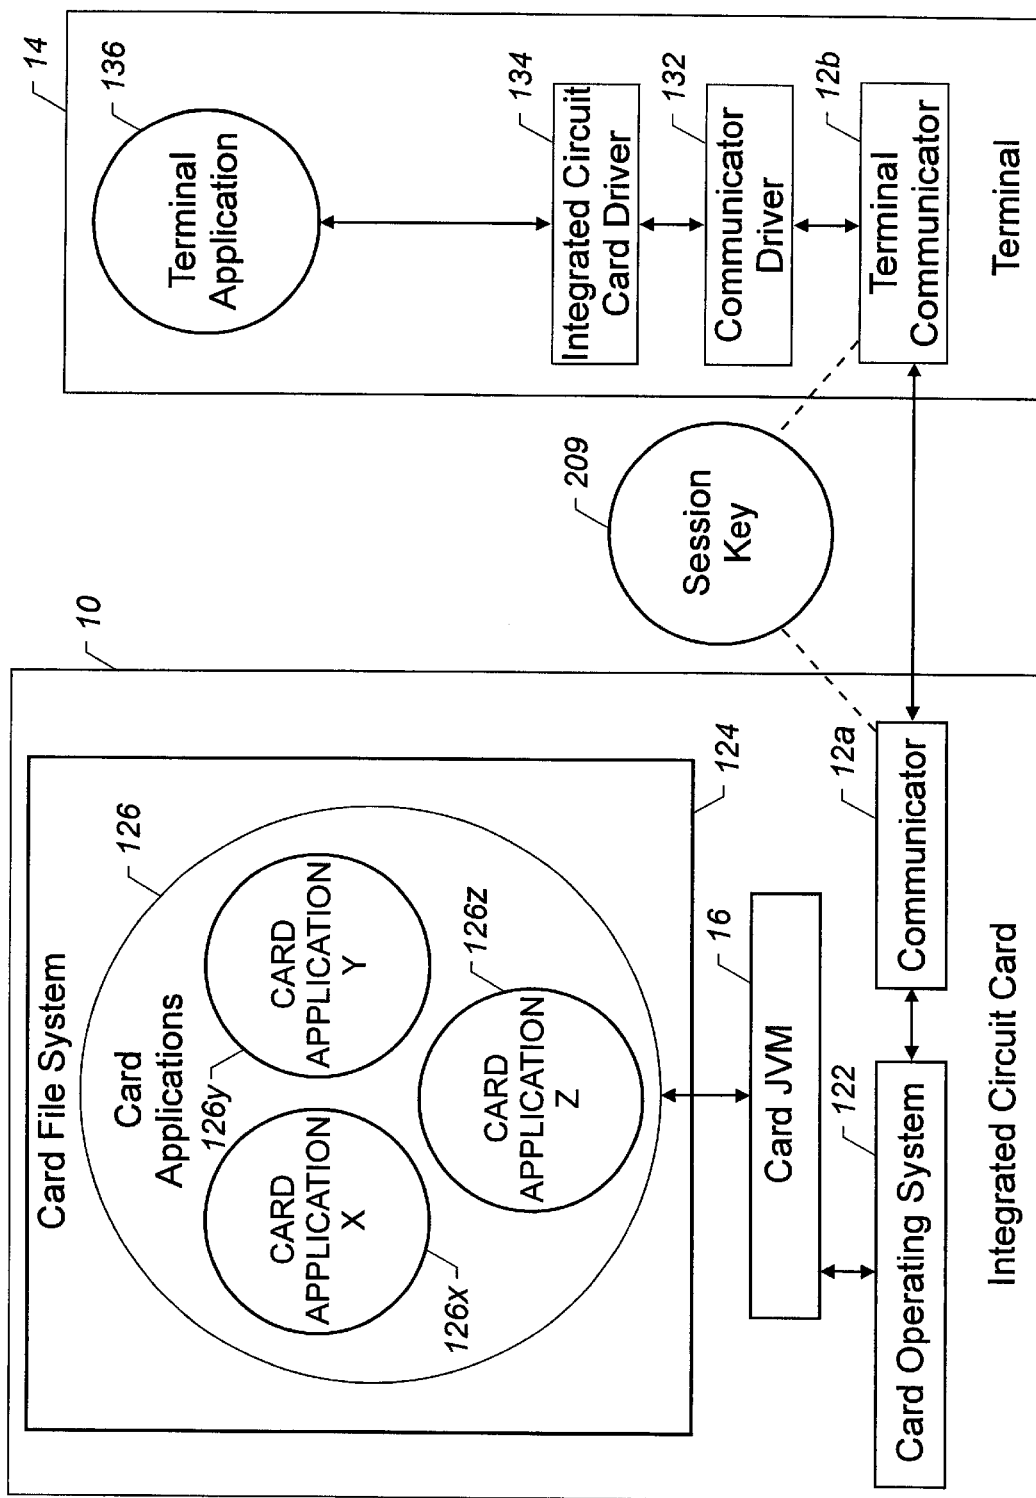


FIGURE 13

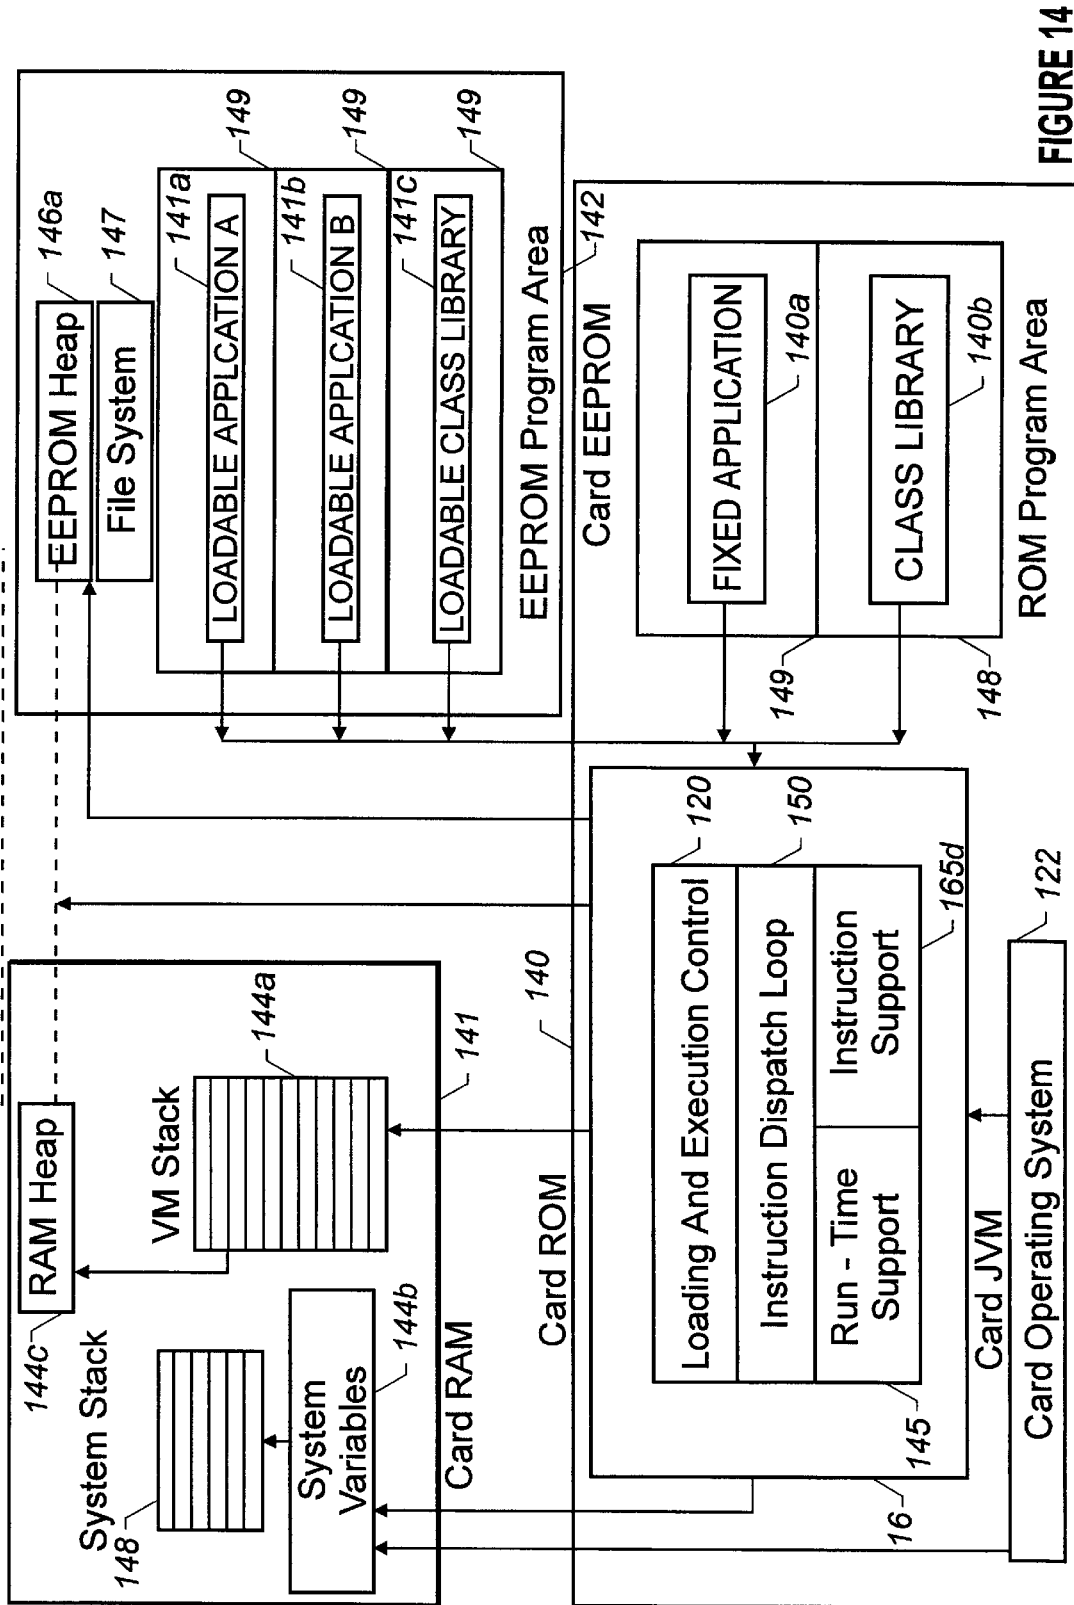


FIGURE 14

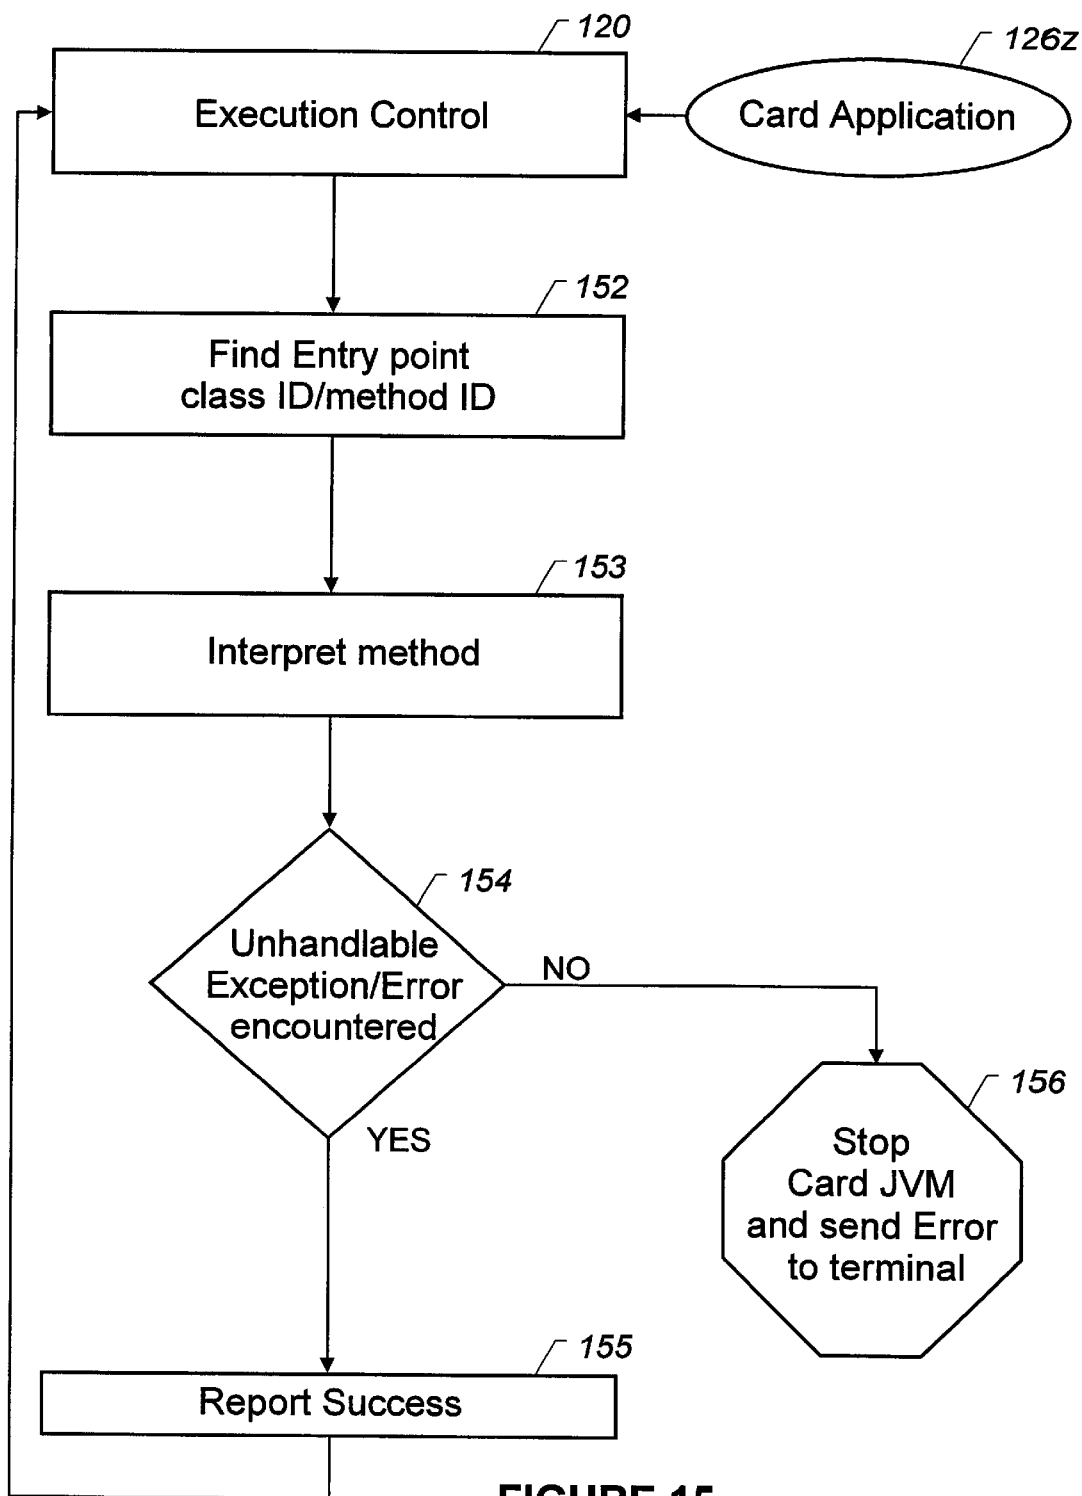


FIGURE 15

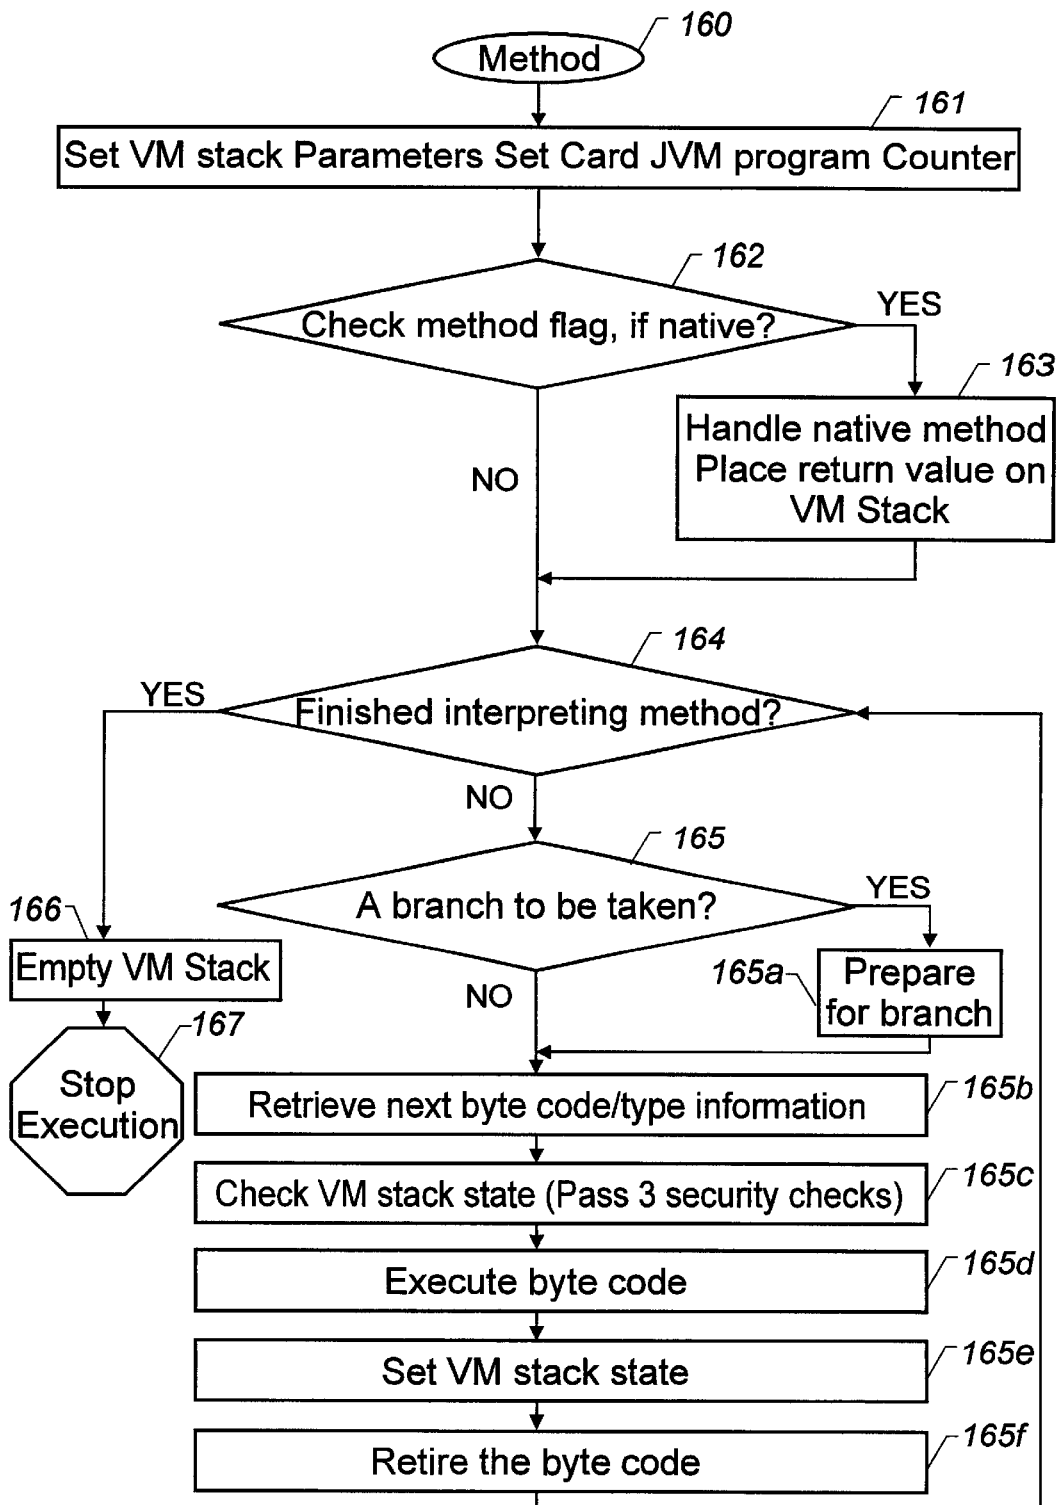


FIGURE 16

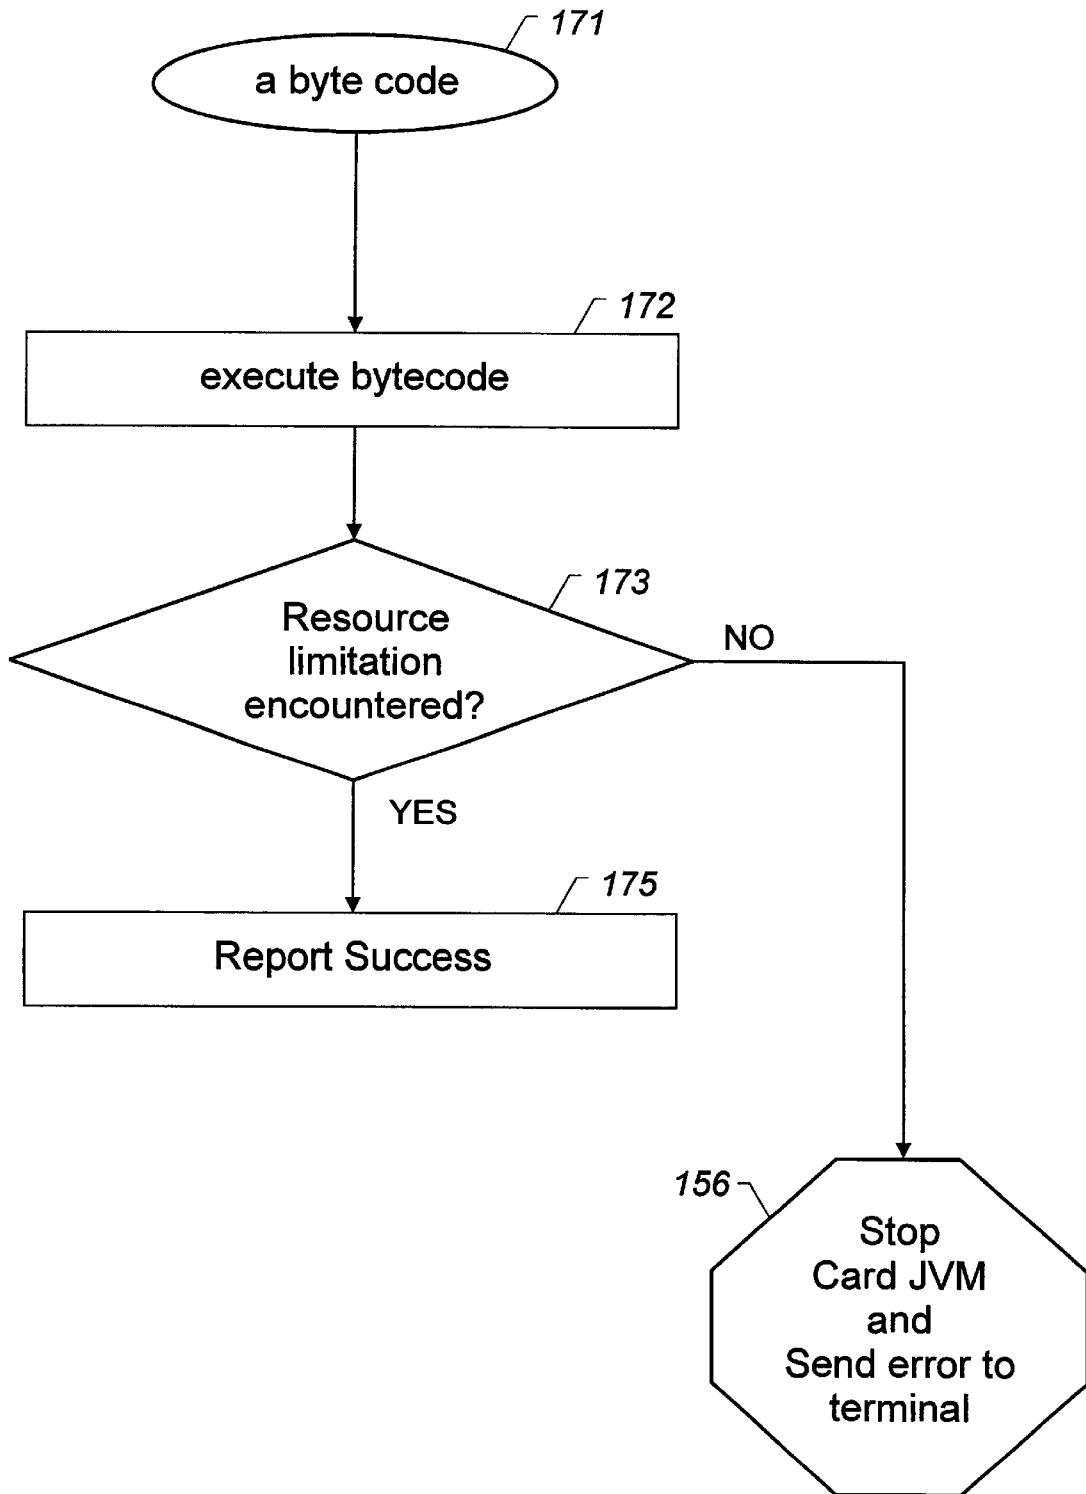


FIGURE 17

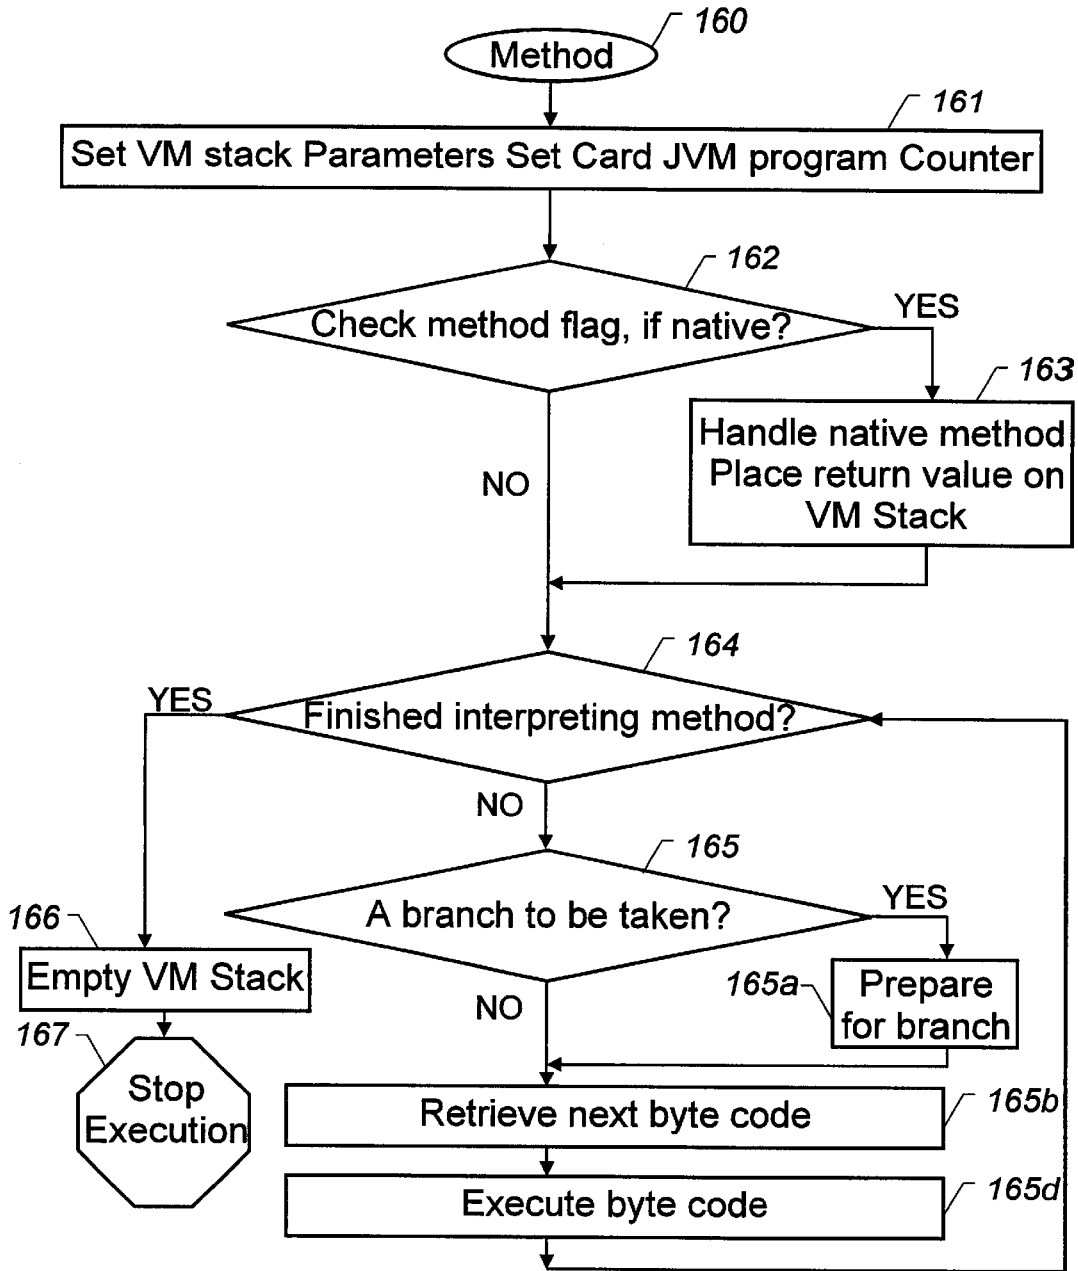


FIGURE 18

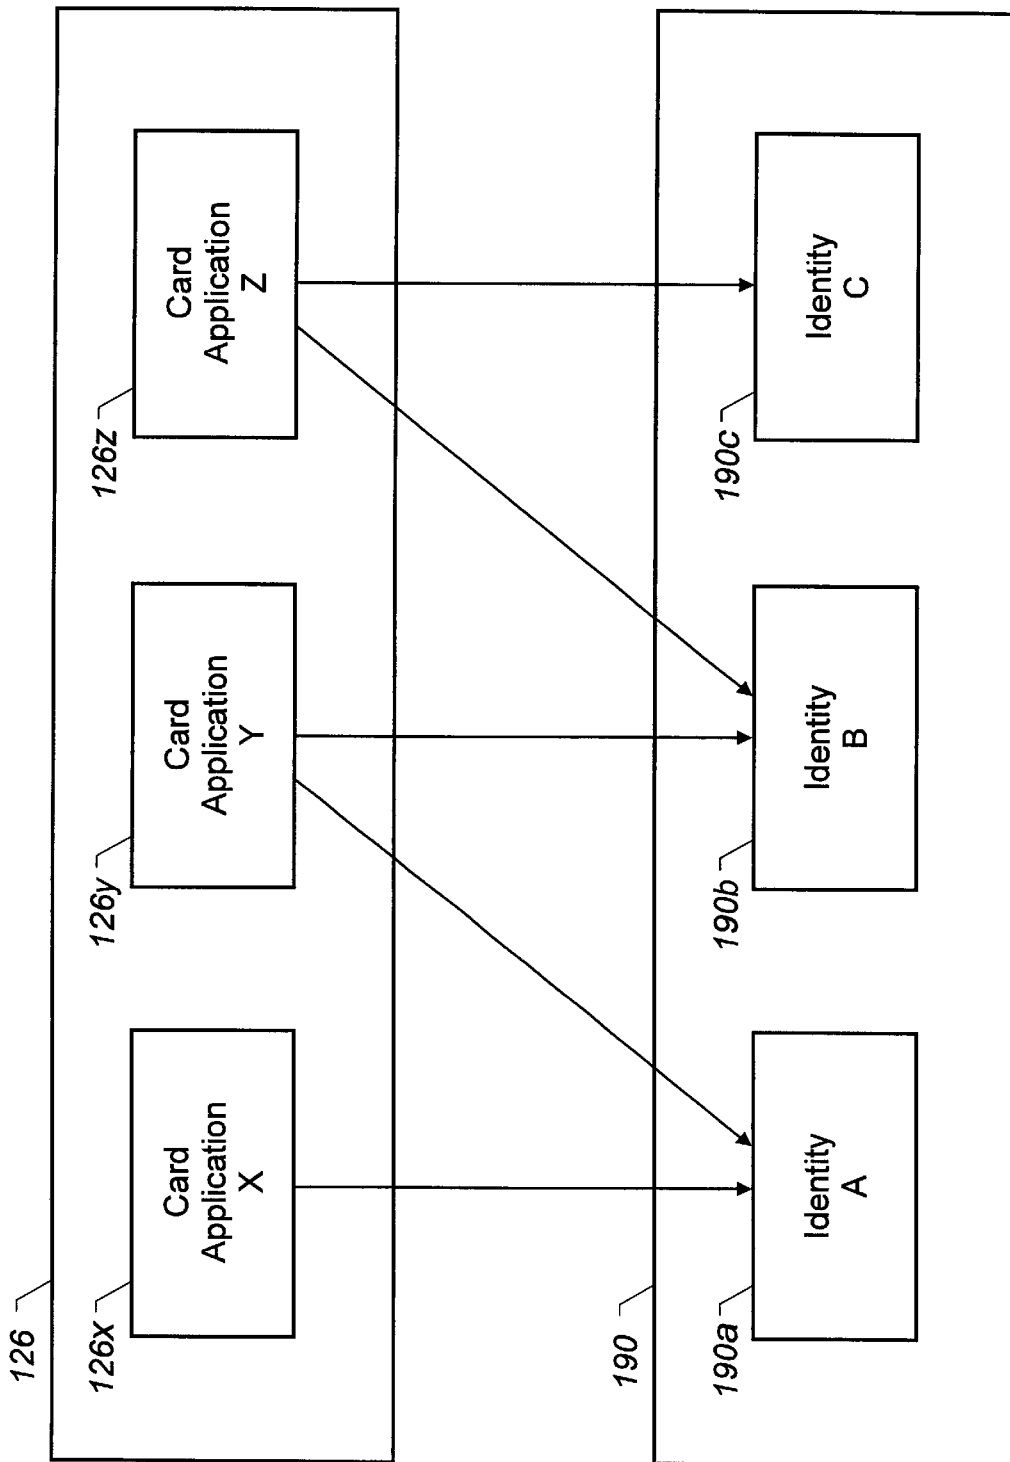


FIGURE 19

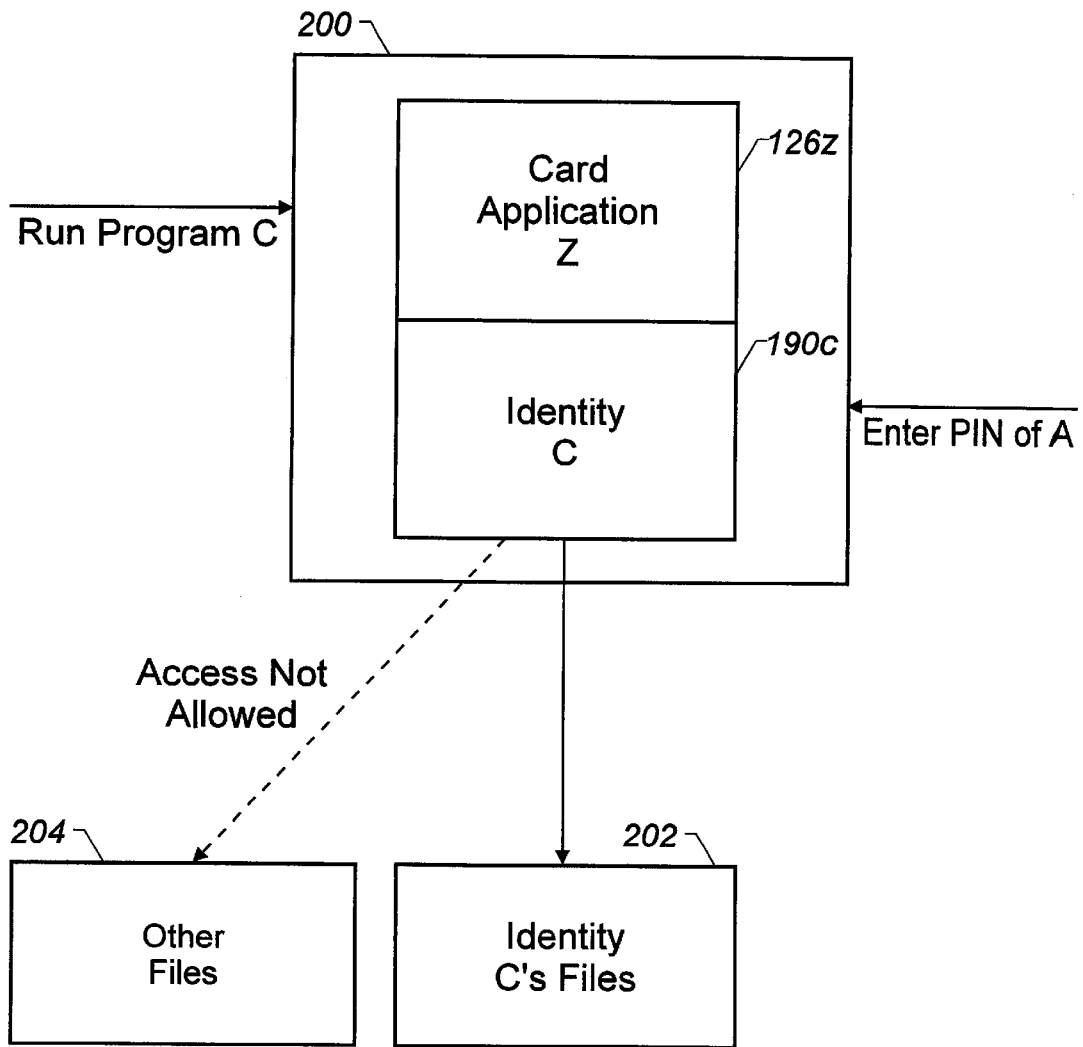


FIGURE 20

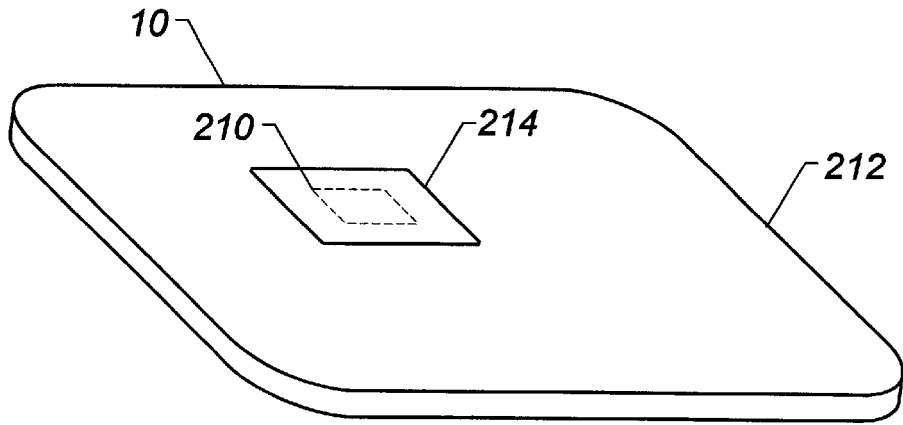


FIGURE 21

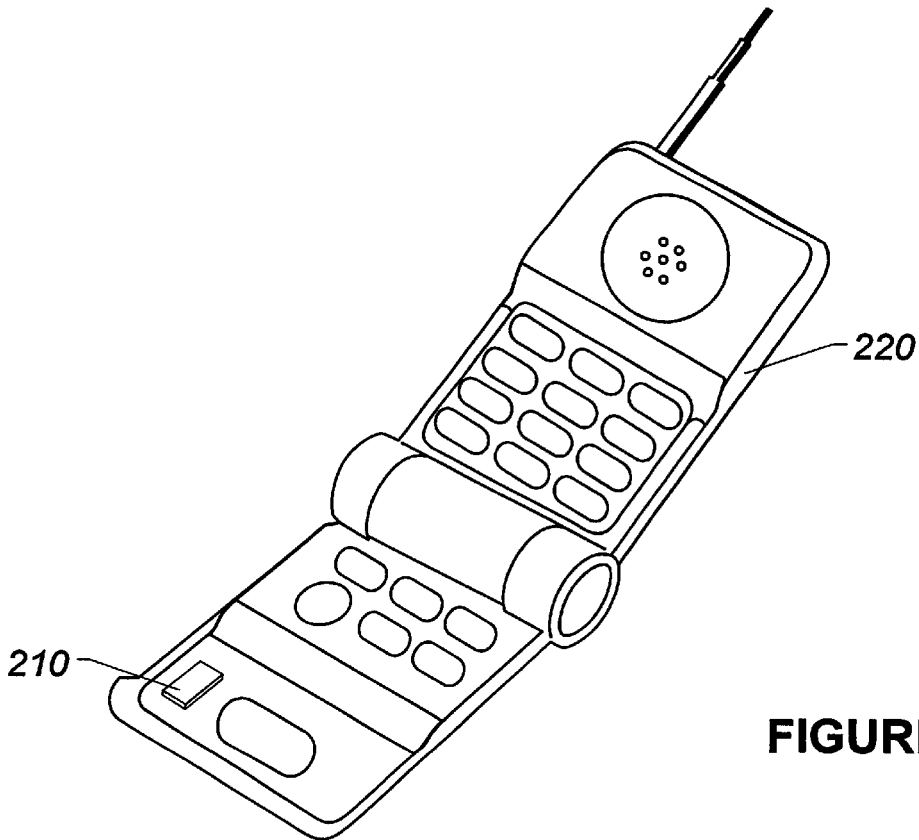


FIGURE 22

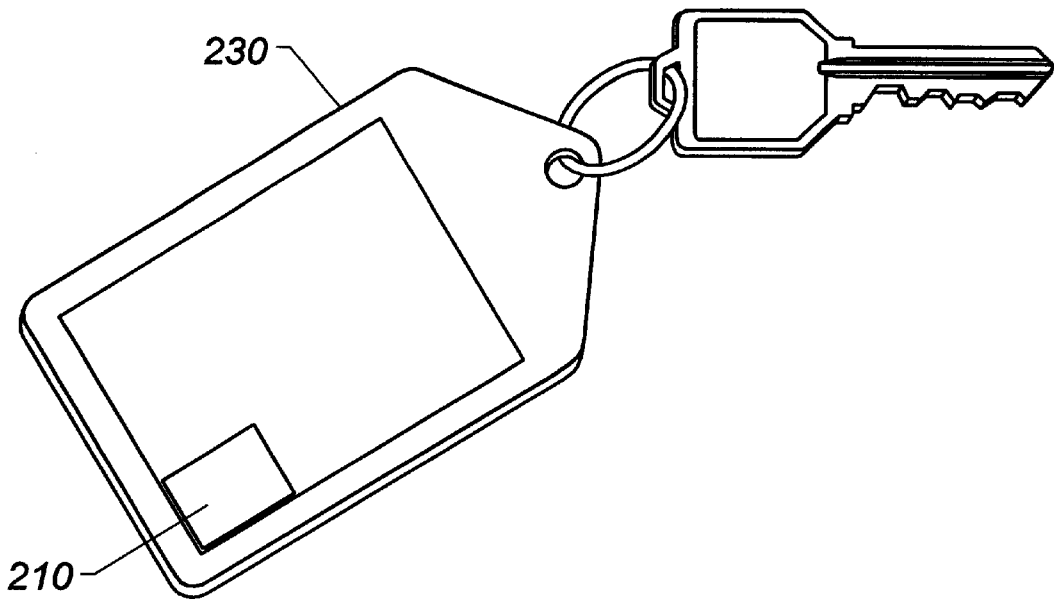


FIGURE 23

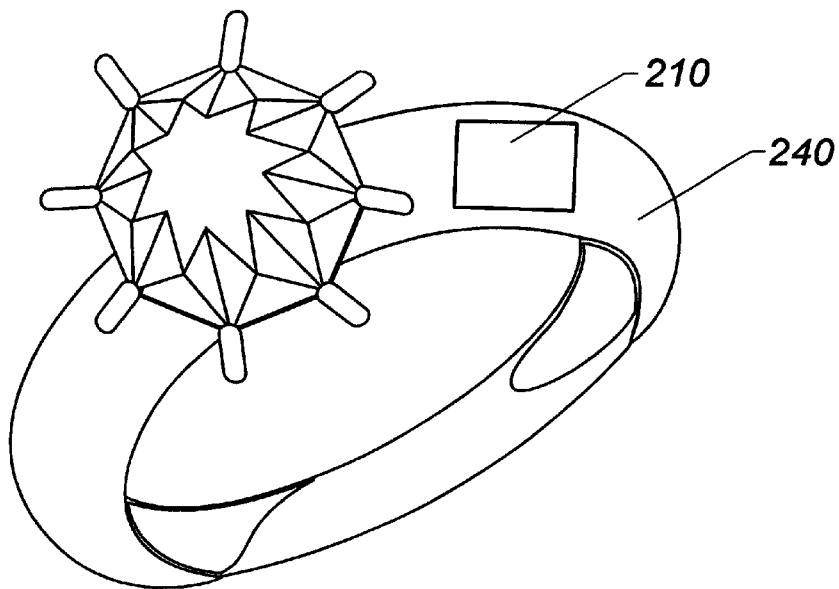


FIGURE 24

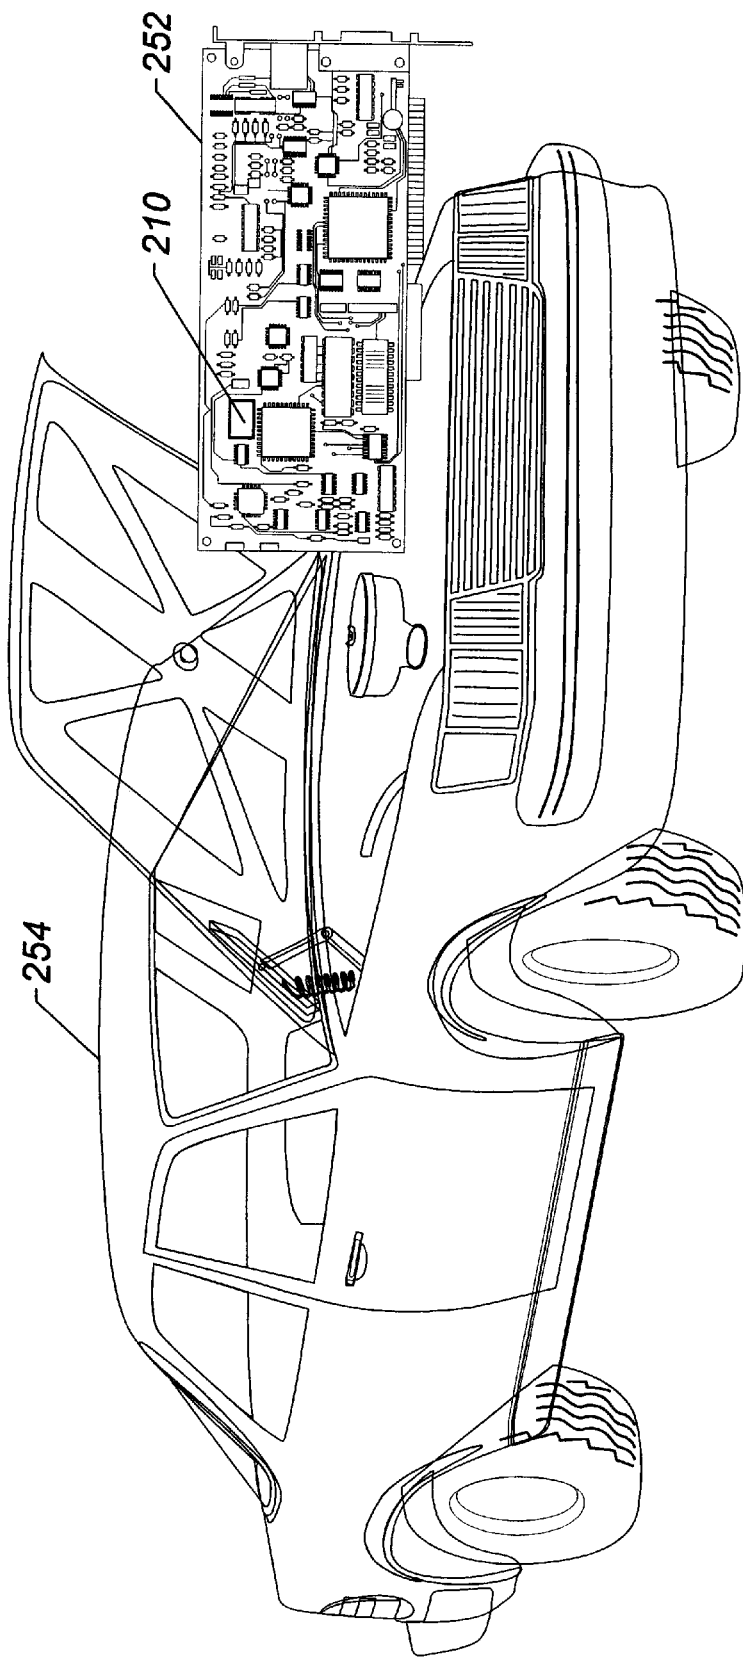


FIGURE 25

US 6,308,317 B1

1

USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER

Under 35 U.S.C. § 119(e), this application claims benefit of prior U.S. provisional application Serial No. 60/029,057, filed Oct. 25, 1996.

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

This invention relates in general to the field of programming, and more particularly to using a high level programming language with a smart card or a microcontroller.

Software applications written in the Java high-level programming language have been so designed that an application written in Java can be run on many different computer brands or computer platforms without change. This is accomplished by the following procedure. When a Java application is written, it is compiled into "Class" files containing byte codes that are instructions for a hypothetical computer called a Java Virtual Machine. An implementation of this virtual machine is written for each platform that is supported. When a user wishes to run a particular Java application on a selected platform, the class files compiled from the desired application is loaded onto the selected platform. The Java virtual machine for the selected platform is run, and interprets the byte codes in the class file, thus effectively running the Java application.

Java is described in the following references which are hereby incorporated by reference: (1) Arnold, Ken, and James Gosling, "The Java Programming Language," Addison-Wesley, 1996; (2) James Gosling, Bill Joy, and Guy Steele, "The Java Language Specification," Sun Microsystems, 1996, (web site: http://java.sun.com/doc/language_specification); (3) James Gosling and Henry McGilton, "The Java Language Environment: A White Paper," Sun Microsystems, 1995 (web site: http://java.sun.com/doc/language_environment/); and (4) Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1997. These texts among many others describe how to program using Java.

In order for a Java application to run on a specific platform, a Java virtual machine implementation must be written that will run within the constraints of the platform, and a mechanism must be provided for loading the desired Java application on the platform, again keeping within the constraints of this platform.

Conventional platforms that support Java are typically microprocessor-based computers, with access to relatively large amounts of memory and hard disk storage space. Such microprocessor implementations frequently are used in desktop and personal computers. However, there are no conventional Java implementations on microcontrollers, as would typically be used in a smart card.

Microcontrollers differ from microprocessors in many ways. For example, a microprocessor typically has a central processing unit that requires certain external components (e.g., memory, input controls and output controls) to function properly. A typical microprocessor can access from a megabyte to a gigabyte of memory, and is capable of

2

processing 16, 32, or 64 bits of information or more with a single instruction. In contrast to the microprocessor, a microcontroller includes a central processing unit, memory and other functional elements, all on a single semiconductor substrate, or integrated circuit (e.g., a "chip"). As compared to the relatively large external memory accessed by the microprocessor, the typical microcontroller accesses a much smaller memory. A typical microcontroller can access one to sixty-four kilobytes of built-in memory, with sixteen kilobytes being very common.

There are generally three different types of memory used: random access memory (RAM), read only memory (ROM), and electrically erasable programmable read only memory (EEPROM). In a microcontroller, the amount of each kind of memory available is constrained by the amount of space in the integrated circuit used for each kind of memory. Typically, RAM takes the most space, and is in shortest supply. ROM takes the least space, and is abundant. EEPROM is more abundant than RAM, but less than ROM.

Each kind of memory is suitable for different purposes. Although ROM is the least expensive, it is suitable only for data that is unchanging, such as operating system code. EEPROM is useful for storing data that must be retained when power is removed, but is extremely slow to write. RAM can be written and read at high speed, but is expensive and data in RAM is lost when power is removed. A microprocessor system typically has relatively little ROM and EEPROM, and has 1 to 128 megabytes of RAM, since it is not constrained by what will fit on a single integrated circuit device, and often has access to an external disk memory system that serves as a large writable, non-volatile storage area at a lower cost than EEPROM. However, a microcontroller typically has a small RAM of 0.1 to 2.0 K, 2K to 8K of EEPROM, and 8K-56K of ROM.

Due to the small number of external components required and their small size, microcontrollers frequently are used in integrated circuit cards, such as smart cards. Such smart cards come in a variety of forms, including contact-based cards, which must be inserted into a reader to be used, and contactless cards, which need not be inserted. In fact, microcontrollers with contactless communication are often embedded into specialized forms, such as watches and rings, effectively integrating the functionality of a smart card in an ergonomically attractive manner.

Because of the constrained environment, applications for smart cards are typically written in a low level programming language (e.g., assembly language) to conserve memory.

The integrated circuit card is a secure, robust, tamper-resistant and portable device for storing data. The integrated circuit card is the most personal of personal computers because of its small size and because of the hardware and software data security features unique to the integrated circuit card.

The primary task of the integrated circuit card and the microcontroller on the card is to protect the data stored on the card. Consequently, since its invention in 1974, integrated circuit card technology has been closely guarded on these same security grounds. The cards were first used by French banks as debit cards. In this application, before a financial transaction based on the card is authorized, the card user must demonstrate knowledge of a 4-digit personal identification number (PIN) stored in the card in addition to being in possession of the card. Any information that might contribute to discovering the PIN number on a lost or stolen card was blocked from public distribution. In fact, since nobody could tell what information might be useful in this

US 6,308,317 B1

3

regard, virtually all information about integrated circuit cards was withheld.

Due to the concern for security, applications written for integrated circuit cards have unique properties. For example, each application typically is identified with a particular owner or identity. Because applications typically are written in a low-level programming language, such as assembly language, the applications are written for a particular type of microcontroller. Due to the nature of low level programming languages, unauthorized applications may access data on the integrated circuit card. Programs written for an integrated circuit card are identified with a particular identity so that if two identities want to perform the same programming function there must be two copies of some portions of the application on the microcontroller of the integrated circuit card.

Integrated circuit card systems have historically been closed systems. An integrated circuit card contained a dedicated application that was handcrafted to work with a specific terminal application. Security checking when an integrated circuit card was used consisted primarily of making sure that the card application and the terminal application were a matched pair and that the data on the card was valid.

As the popularity of integrated circuit cards grew, it became clear that integrated circuit card users would be averse to carrying a different integrated circuit card for each integrated circuit card application. Therefore, multiple cooperating applications began to be provided on single provider integrated circuit cards. Thus, for example, an automated teller machine (ATM) access card and a debit card may coexist on a single integrated circuit card platform. Nevertheless, this was still a closed system since all the applications in the terminal and the card were built by one provider having explicit knowledge of the other providers.

The paucity of information about integrated circuit cards—particularly information about how to communicate with them and how to program them—has impeded the general application of the integrated circuit card. However, the advent of public digital networking (e.g., the Internet and the World Wide Web) has opened new domains of application for integrated circuit cards. In particular, this has led to a need to load new applications on the card that do not have explicit knowledge of the other providers, but without the possibility of compromising the security of the card. However, typically, this is not practical with conventional cards that are programmed using low level languages.

SUMMARY OF THE INVENTION

In general, in one aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.

Among the advantages of the invention are one or more of the following. New applications may be downloaded to a smart card without compromising the security of the smart card. These applications may be provided by different companies loaded at different times using different terminals. Security is not compromised since the applications are protected against unauthorized access of any application code or data by the security features provided by the Java virtual machine. Smart card applications can be created in

4

high level languages such as Java and Eiffel, using powerful mainstream program development tools. New applications can be quickly prototyped and downloaded to a smart card in a matter of hours without resorting to soft masks. Embedded systems using microcontrollers can also gain many of these advantages for downloading new applications, high level program development, and rapid prototyping by making use of this invention.

Implementations of the invention may include one or more of the following. The high level programming language format of the application may have a class file format and may have a Java programming language format. The processor may be a microcontroller. At least a portion of the memory may be located in the processor.

The application may have been processed from a second application that has a string of characters, and the string of characters may be represented in the first application by an identifier (e.g., an integer).

The processor may be also configured to receive a request from a requester (e.g., a processor or a terminal) to access an element (e.g., an application stored in the memory, data stored in the memory or the communicator) of the card, after receipt of the request, interact with the requester to authenticate an identity of the requester, and based on the identity, selectively grant access to the element.

The memory may also store an access control list for the element. The access control list furnishes an indication of types of access to be granted to the identity, and based on the access control list, the processor selectively grants specific types of access (e.g., reading data, writing data, appending data, creating data, deleting data or executing an application) to the requester.

The application may be one of a several applications stored in the memory. The processor may be further configured to receive a request from a requester to access one of the plurality of applications; after receipt of the request, determine whether said one of the plurality of applications complies with a predetermined set of rules; and based on the determination, selectively grant access to the requester to said one of the plurality of applications. The predetermined rules provide a guide for determining whether said one of the plurality of applications accesses a predetermined region of the memory. The processor may be further configured to authenticate an identity of the requester and grant access to said one of the plurality of applications based on the identity.

The processor may be also configured to interact with the terminal via the communicator to authenticate an identity; determine if the identity has been authenticated; and based on the determination, selectively allow communication between the terminal and the integrated circuit card.

The communicator and the terminal may communicate via communication channels. The processor may also be configured to assign one of the communication channels to the identity when the processor allows the communication between the terminal and the integrated circuit card. The processor may also be configured to assign a session key to the assigned communication channel and use the session key when the processor and the terminal communicate via the assigned communication channel.

The terminal may have a card reader, and the communicator may include a contact for communicating with the card reader. The terminal may have a wireless communication device, and the communicator may include a wireless transceiver for communicating with the wireless communication device. The terminal may have a wireless communication device, and the communicator may include a wireless transmitter for communicating with the wireless communication device.

US 6,308,317 B1

5

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes storing an interpreter and at least one application having a high level programming language format in a memory of the integrated circuit card. A processor of the integrated circuit card uses the interpreter to interpret the at least one application for execution, and the processor uses a communicator of the card when communicating between the processor and the terminal.

In general, in another aspect, the invention features a smart card. The smart card includes a memory that stores a Java interpreter and a processor that is configured to use the interpreter to interpret a Java application for execution.

In general, in another aspect, the invention features a microcontroller that has a semiconductor substrate and a memory located in the substrate. A programming language interpreter is stored in the memory and is configured to implement security checks. A central processing unit is located in the substrate and is coupled to the memory.

Implementations of the invention may include one or more of the following. The interpreter may be a Java byte code interpreter. The security checks may include establishing firewalls and may include enforcing a sandbox security model.

In general, in another aspect, the invention features a smart card that has a programming language interpreter stored in a memory of the card. The interpreter is configured to implement security check. A central processing unit of the card is coupled to the memory.

In general, in another aspect, the invention features an integrated circuit card that is used with a terminal. The card includes a communicator and a memory that stores an interpreter and first instructions of a first application. The first instructions have been converted from second instructions of a second application. The integrated circuit card includes a processor that is coupled to the memory and is configured to use the interpreter to execute the first instructions and to communicate with the terminal via the communicator.

Implementations of the invention may include one or more of the following. The first and/or second applications may have class file format(s). The first and/or second applications may include byte codes, such as Java byte codes. The first instructions may be generalized or renumbered versions of the second instructions. The second instructions may include constant references, and the first instructions may include constants that replace the constant references of the second instructions. The second instructions may include references, and the references may shift location during the conversion of the second instructions to the first instructions. The first instructions may be relinked to the references after the shifting. The first instructions may include byte codes for a first type of virtual machine, and the second instructions may include byte codes for a second type of virtual machine. The first type is different from the second type.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes converting second instructions of a second application to first instructions of a first application; storing the first instructions in a memory of the integrated circuit card; and using an interpreter of the integrated circuit card to execute the first instructions.

In general, in another aspect, the invention features an integrated circuit for use with a terminal. The integrated circuit card has a communicator that is configured to com-

6

municate with the terminal and a memory that stores a first application that has been processed from a second application having a string of characters. The string of characters are represented in the first application by an identifier. The integrated circuit card includes a processor that is coupled to the memory. The processor is configured to use the interpreter to interpret the first application for execution and to use the communicator to communicate with the terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes processing a second application to create a first application. The second application has a string of characters. The string of characters is represented by an identifier in the second application. An interpreter and the first application are stored in a memory of the integrated circuit card. A processor uses an interpreter to interpret the first application for execution.

In general, in another aspect, the invention features a microcontroller that includes a memory which stores an application and an interpreter. The application has a class file format. A processor of the microcontroller is coupled to the memory and is configured to use the interpreter to interpret the application for execution.

In implementations of the invention, the microcontroller may also include a communicator that is configured to communicate with a terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes storing a first application in a memory of the integrated circuit card, storing a second application in the memory of the integrated circuit card, and creating a firewall that isolates the first and second applications so that the second application cannot access either the first application or data associated with the first application.

In general, in another aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a communicator that is configured to communicate with the terminal, a memory and a processor. The memory stores applications, and each application has a high level programming language format. The memory also stores an interpreter. The processor is coupled to the memory and is configured to: a.) use the interpreter to interpret the applications for execution, b.) use the interpreter to create a firewall to isolate the applications from each other, and c.) use the communicator to communicate with the terminal.

Other advantages and features will become apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a block diagram of an integrated card system.

FIG. 2 is a flow diagram illustrating the preparation of Java applications to be downloaded to an integrated circuit card.

FIG. 3 is a block diagram of the files used and generated by the card class file converter.

FIG. 4 is a block diagram illustrating the transformation of application class file(s) into a card class file.

FIG. 5 is a flow diagram illustrating the working of the class file converter.

FIG. 6 is a flow diagram illustrating the modification of the byte codes.

FIG. 7 is a block diagram illustrating the transformation of specific byte codes into general byte codes.

FIG. 8 is a block diagram illustrating the replacement of constant references with constants.

US 6,308,317 B1

7

FIG. 9 is a block diagram illustrating the replacement of references with their updated values.

FIG. 10 is a block diagram illustrating renumbering of original byte codes.

FIG. 11 is a block diagram illustrating translation of original byte codes for a different virtual machine architecture.

FIG. 12 is a block diagram illustrating loading applications into an integrated circuit card.

FIG. 13 is a block diagram illustrating executing applications in an integrated circuit card.

FIG. 14 is a schematic diagram illustrating memory organization for ROM, RAM and EEPROM.

FIG. 15 is a flow diagram illustrating the overall architecture of the Card Java virtual machine.

FIG. 16 is a flow diagram illustrating method execution in the Card Java virtual machine with the security checks.

FIG. 17 is a flow diagram illustrating byte code execution in the Card Java virtual machine.

FIG. 18 is a flow diagram illustrating method execution in the Card Java virtual machine without the security checks.

FIG. 19 is a block diagram illustrating the association between card applications and identities.

FIG. 20 is a block diagram illustrating the access rights of a specific running application.

FIG. 21 is a perspective view of a microcontroller on a smart card.

FIG. 22 is a perspective view of a microcontroller on a telephone.

FIG. 23 is a perspective view of a microcontroller on a key ring.

FIG. 24 is a perspective view of a microcontroller on a ring.

FIG. 25 is a perspective view of a microcontroller on a circuit card of an automobile.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, an integrated circuit card 10 (e.g., a smart card) is constructed to provide a high level, Java-based, multiple application programming and execution environment. The integrated circuit card 10 has a communicator 12a that is configured to communicate with a terminal communicator 12b of a terminal 14. In some embodiments, the integrated circuit card 10 is a smart card with an 8 bit microcontroller, 512 bytes of RAM, 4K bytes of EEPROM, and 20K of ROM; the terminal communicator 12b is a conventional contact smart card reader; and the terminal 14 is a conventional personal computer running the Windows NT operating system supporting the personal computer smart card (PC/SC) standard and providing Java development support.

In some embodiments, the microcontroller, memory and communicator are embedded in a plastic card that has substantially the same dimensions as a typical credit card. In other embodiments, the microcontroller, memory and communicator are mounted within bases other than a plastic card, such as jewelry (e.g., watches, rings or bracelets), automotive equipment, telecommunication equipment (e.g., subscriber identity module (SIM) cards), security devices (e.g., cryptographic modules) and appliances.

The terminal 14 prepares and downloads Java applications to the integrated circuit card 10 using the terminal

8

communicator 12b. The terminal communicator 12b is a communications device capable of establishing a communications channel between the integrated circuit card 10 and the terminal 14. Some communication options include contact card readers, wireless communications via radio frequency or infrared techniques, serial communication protocols, packet communication protocols, ISO 7816 communication protocol, to name a few.

The terminal 14 can also interact with applications running in the integrated circuit card 10. In some cases, different terminals may be used for these purposes. For example, one kind of terminal may be used to prepare applications, different terminals could be used to download the applications, and yet other terminals could be used to run the various applications. Terminals can be automated teller machines (ATMs), point-of-sale terminals, door security systems, toll payment systems, access control systems, or any other system that communicates with an integrated circuit card or microcontroller.

The integrated circuit card 10 contains a card Java virtual machine (Card JVM) 16, which is used to interpret applications which are contained on the card 10.

Referring to FIG. 2, the Java application 20 includes three Java source code files A.java 20a, B.java 20b, and C.java 20c. These source code files are prepared and compiled in a Java application development environment 22. When the Java application 20 is compiled by the development environment 22, application class files 24 are produced, with these class files A.class 24a, B.class 24b, and C.class 24c corresponding to their respective class Java source code 20a, 20b, and 20c. The application class files 24 follow the standard class file format as documented in chapter 4 of the Java virtual machine specification by Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1996. These application class files 24 are fed into the card class file converter 26, which consolidates and compresses the files, producing a single card class file 27. The card class file 27 is loaded to the integrated circuit card 10 using a conventional card loader 28.

Referring to FIG. 3, the card class file converter 26 is a class file postprocessor that processes a set of class files 24 that are encoded in the standard Java class file format, optionally using a string to ID input map file 30 to produce a Java card class file 27 in a card class file format. One such card class file format is described in Appendix A which is hereby incorporated by reference. In addition, in some embodiments, the card class file converter 26 produces a string to ID output map file 32 that is used as input for a subsequent execution of the card class file converter.

In some embodiments, in order for the string to ID mapping to be consistent with a previously generated card class file (in the case where multiple class files reference the same strings), the card class file converter 26 can accept previously defined string to ID mappings from a string to ID input map file 30. In the absence of such a file, the IDs are generated by the card class file converter 26. Appendix B, which is hereby incorporated by reference, describes one possible way of implementing and producing the string to ID input map file 30 and string to ID output map file 32 and illustrates this mapping via an example.

Referring to FIG. 4, a typical application class file 24a includes class file information 41; a class constant pool 42; class, fields created, interfaces referenced, and method information 43; and various attribute information 44, as detailed in aforementioned Java Virtual Machine Specification. Note that much of the attribute information 44 is not needed for

this embodiment and is eliminated **45** by the card class file converter **26**. Eliminated attributes include SourceFile, ConstantValue, Exceptions, LineNumberTable, LocalVariableTable, and any optional vendor attributes. The typical card class file **27** as described in Appendix A is derived from the application class files **24** in the following manner. The card class file information **46** is derived from the aggregate class file information **41** of all application class files **24a**, **24b**, and **24c**. The card class file constant pool **47** is derived from the aggregate class constant pool **42** of all application class files **24a**, **24b**, and **24c**. The card class, fields created, interfaces referenced, and method information **48** is derived from the aggregate class, fields created, interfaces referenced, and method information **43** of all application class files **24a**, **24b**, and **24c**. The card attribute information **49** in this embodiment is derived from only the code attribute of the aggregate attribute information **44** of all application class files **24a**, **24b**, and **24c**.

To avoid dynamic linking in the card, all the information that is distributed across several Java class files **24a**, **24b**, and **24c** that form the application **24**, are coalesced into one card class file **27** by the process shown in the flowchart in FIG. **5**. The first class file to be processed is selected **51a**. The constant pool **42** is compacted **51b** in the following manner. All objects, classes, fields, methods referenced in a Java class file **24a** are identified by using strings in the constant pool **42** of the class file **24a**. The card class file converter **26** compacts the constant pool **42** found in the Java class file **24a** into an optimized version. This compaction is achieved by mapping all the strings found in the class file constant pool **42** into integers (the size of which is micro-controller architecture dependent). These integers are also referred to as IDs. Each ID uniquely identifies a particular object, class, field or method in the application **20**. Therefore, the card class file converter **26** replaces the strings in the Java class file constant pool **42** with its corresponding unique ID. Appendix B shows an example application HelloSmartCard.java, with a table below illustrating the IDs corresponding to the strings found in the constant pool of the class file for this application. The IDs used for this example are 16-bit unsigned integers.

Next, the card class file converter **26** checks for unsupported features **51c** in the Code attribute of the input Java class file **24a**. The Card JVM **16** only supports a subset of the full Java byte codes as described in Appendix C, which is hereby incorporated by reference. Hence, the card class file converter **26** checks for unsupported byte codes in the Code attribute of the Java class file **24a**. If any unsupported byte codes are found **52**, the card class file converter flags an error and stops conversion **53**. The program code fragment marked "A" in APPENDIX D shows how these spurious byte codes are apprehended. Another level of checking can be performed by requiring the standard Java development environment **22** to compile the application **20** with a '-g' flag. Based on the aforementioned Java virtual machine specification, this option requires the Java compiler to place information about the variables used in a Java application **20** in the LocalVariableTable attribute of the class file **24a**. The card class file converter **26** uses this information to check if the Java class file **24a** references data types not supported by the Java card.

Next, the card class file converter **26** discards all the unnecessary parts **51c** of the Java class file **24a** not required for interpretation. A Java class file **24a** stores information pertaining to the byte codes in the class file in the Attributes section **44** of the Java class file. Attributes that are not required for interpretation by the card JVM **16**, such as

SourceFile, ConstantValue, Exceptions, LineNumberTable, and LocalvariableTable may be safely discarded **45**. The only attribute that is retained is the Code attribute. The Code attribute contains the byte codes that correspond to the methods in the Java class file **24a**.

Modifying the byte codes **54** involves examining the Code attribute information **44** for each method in the class file, and modifying the operands of byte codes that refer to entries in the Java class file constant pool **42** to reflect the entries in the card class file constant pool **47**. In some embodiments, the byte codes are also modified, as described below.

Modifying the byte codes **54** involves five passes (with two optional passes) as described by the flowchart in FIG. **6**. The original byte codes **60** are found in the Code attribute **44** of the Java class file **24a** being processed. The first pass **61** records all the jumps and their destinations in the original byte codes. During later byte code translation, some single byte code may be translated to dual or triple bytes. FIG. **7** illustrates an example wherein byte code ILOAD_0 is replaced with two bytes, byte code ILOAD and argument **0**. When this is done, the code size changes, requiring adjustment of any jump destinations which are affected. Therefore, before these transformations are made, the original byte codes **60** are analyzed for any jump byte codes and a note made of their position and current destination. The program code fragment marked "B" in Appendix D shows how these jumps are recorded. Appendix D is hereby incorporated by reference.

Once the jumps are recorded, if the optional byte code translation is not being performed **62**, the card class file converter **26** may proceed to the third pass **64**.

Otherwise, the card class file converter converts specific byte codes into generic byte codes. Typically, the translated byte codes are not interpreted in the Card JVM **16** but are supported by converting the byte codes into equivalent byte codes that can be interpreted by the Card JVM **16** (see FIG. **7**). The byte codes **70** may be replaced with another semantically equivalent but different byte codes **72**. This generally entails the translation of short single specific byte codes such as ILOAD_0 into their more general versions. For example, ILOAD_0 may be replaced by byte code ILOAD with an argument **0**. This translation is done to reduce the number of byte codes translated by the Card JVM **16**, consequently reducing the complexity and code space requirements for the Card JVM **16**. The program code fragment marked "C" in Appendix D shows how these translations are made. Note that such translations increase the size of the resulting byte code and force the re-computation of any jumps which are affected.

In the third pass **64**, the card class file converter rebuilds constant references via elimination of the strings used to denote these constants. FIG. **8** shows an example wherein the byte code LDC **80** referring to constant "18" found via an index in the Java class file **24a** constant pool **42** may be translated into BIPUSH byte code **82**. In this pass the card class file converter **26** modifies the operands to all the byte codes that refer to entries in the Java class file constant pool **42** to reflect their new location in the card class file constant pool **47**. FIG. **9** shows an example wherein the argument to a byte code, INVOKESTATIC **90**, refers to an entry in the Java class file constant pool **42** that is modified to reflect the new location of that entry in the card class file constant pool **47**. The modified operand **94** shows this transformation. The program code fragment marked "D" in Appendix D shows how these modifications are made.

US 6,308,317 B1

11

Once the constant references are relinked, if the optional byte code modification is not being performed, the card class file converter may proceed to the fifth and final pass 67.

Otherwise, the card class file converter modifies the original byte codes into a different set of byte codes supported by the particular Card JVM 16 being used. One potential modification renumbers the original byte codes 60 into Card JVM 16 byte codes (see FIG. 10). This renumbering causes the byte codes 100 in the original byte codes 60 to be modified into a renumbered byte codes 102. Byte code ILOAD recognized by value 21 may be renumbered to be recognized by value 50. This modification may be done for optimizing the type tests (also known in prior art as Pass 3 checks) in the Card JVM 16. The program code fragment marked "E" in Appendix D shows an implementation of this embodiment. This modification may be done in order to reduce the program space required by the Card JVM 16 to interpret the byte code. Essentially this modification regroups the byte codes into Card JVM 16 byte codes so that byte codes with similar operands, results are grouped together, and there are no gaps between Card JVM 16 byte codes. This allows the Card JVM 16 to efficiently check Card JVM 16 byte codes and validate types as it executes.

In some embodiments, the card class file converter modifies the original byte codes 60 into a different set of byte codes designed for a different virtual machine architecture, as shown in FIG. 11. The Java byte code ILOAD 112 intended for use on a word stack 114 may be replaced by Card JVM 16 byte code ILOAD_B 116 to be used on a byte stack 118. An element in a word stack 114 requires allocating 4 bytes of stack space, whereas an element in the byte stack 118 requires only one byte of stack space. Although this option may provide an increase in execution speed, it risks losing the security features available in the original byte codes.

Since the previous steps 63, 64 or 66 may have changed the size of the byte codes 60 the card class file converter 26 has to relink 67 any jumps which have been effected. Since the jumps were recorded in the first step 61 of the card class file converter 26, this adjustment is carried out by fixing the jump destinations to their appropriate values. The program code fragment marked "F" in Appendix D shows how these jumps are fixed.

The card class file converter now has modified byte codes 68 that is equivalent to the original byte codes 60 ready for loading. The translation from the Java class file 24a to the card class file 27 is now complete.

Referring back to FIG. 5, if more class files 24 remain to be processed 55 the previous steps 51a, 51b, 51c, 52 and 54 are repeated for each remaining class file. The card class file converter 26 gathers 56 the maps and modified byte codes for the classes 24 that have been processed, places them as an aggregate and generates 57 a card class file 27. If required, the card class file converter 26 generates a string to ID output map file 32, that contains a list of all the new IDs allocated for the strings encountered in the constant pool 42 of the Java class files 24 during the translation.

Referring to FIG. 12, the card loader 28 within the terminal 14 sends a card class file to the loading and execution control 120 within the integrated circuit card 10 using standard ISO 7816 commands. The loading and execution control 120 with a card operating system 122, which provides the necessary system resources, including support for a card file system 124, which can be used to store several card applications 126. Many conventional card loaders are written in low level languages, supported by the card oper-

12

ating system 122. In the preferred embodiment, the bootstrap loader is written in Java, and the integrated circuit card 10 includes a Java virtual machine to run this application. A Java implementation of the loading and execution control 120 is illustrated in Appendix E which is hereby incorporated by reference. The loading and execution control 120 receives the card class file 26 and produces a Java card application 126x stored in the card file system 126 in the EEPROM of the integrated circuit card 10. Multiple Java card applications 126x, 126y, and 126z can be stored in a single card in this manner. The loading and execution control 120 supports commands whereby the terminal 14 can select which Java card application to run immediately, or upon the next card reset.

Referring to FIG. 13, upon receiving a reset or an execution command from the loading and execution control 120, the Card Java Virtual Machine (Card JVM) 16 begins execution at a predetermined method (for example, main) of the selected class in the selected Java Card application 126z. The Card JVM 16 provides the Java card application 126z access to the underlying card operating system 122, which provides capabilities such as I/O, EEPROM support, file systems, access control, and other system functions using native Java methods as illustrated in Appendix F which is hereby incorporated by reference.

The selected Java card application 126z communicates with an appropriate application in the terminal 14 using the communicator 12a to establish a communication channel to the terminal 14. Data from the communicator 12a to the terminal 14 passes through a communicator driver 132 in the terminal, which is specifically written to handle the communications protocol used by the communicator 12a. The data then passes to an integrated circuit card driver 134, which is specifically written to address the capabilities of the particular integrated circuit card 10 being used, and provides high level software services to the terminal application 136. In the preferred embodiment, this driver would be appropriate PC/SC Smartcard Service Provider (SSP) software. The data then passes to the terminal application 136, which must handle the capabilities provided by the particular card application 126z being run. In this manner, commands and responses pass back and forth between the terminal application 136 and the selected card application 126z. The terminal application interacts with the user, receiving commands from the user, some of which are passed to the selected Java card application 126z, and receiving responses from the Java card application 126z, which are processed and passed back to the user.

Referring to FIG. 14, the Card JVM 16 is an interpreter that interprets a card application 126x. The memory resources in the microcontroller that impact the Card JVM 16 are the Card ROM 140, Card RAM 141 and the Card EEPROM 142. The Card ROM 140 is used to store the Card JVM 16 and the card operating system 122. Card ROM 140 may also be used to store fixed card applications 140a and class libraries 140b. Loadable applications 141a, 141b and libraries 141c may also be stored in Card RAM 141. The Card JVM 16 interprets a card application 141a, 141b, or 140a. The Card JVM 16 uses the Card RAM to store the VM stack 144a and system state variables 144b. The Card JVM 16 keeps track of the operations performed via the VM stack 144a. The objects created by the Card JVM 16 are either on the RAM heap 144c, in the EEPROM heap 146a, or in the file system 147.

All of the heap manipulated by the Card JVM 16 may be stored in the Card RAM 141 as a RAM Heap 144c, or it may be distributed across to the Card EEPROM 142 as a

US 6,308,317 B1

13

EEPROM Heap **146a**. Card RAM **141** is also used for recording the state of the system stack **148** that is used by routines written in the native code of the microcontroller. The Card JVM **16** uses the Card EEPROM **142** to store application data either in the EEPROM heap **146a** or in the file system **147**. Application data stored in a file may be manipulated via an interface to the card operating system **122**. This interface is provided by a class library **140b** stored in Card ROM **140**, by a loadable class library **141c** stored in Card EEPROM **142**. One such interface is described in Appendix F. Applications and data in the card are isolated by a firewall mechanism **149**.

To cope with the limited resources available on microcontrollers, the Card JVM **16** implements a strict subset of the Java programming language. Consequently, a Java application **20** compiles into a class file that contains a strict subset of Java byte codes. This enables application programmers to program in this strict subset of Java and still maintain compatibility with existing Java Virtual Machines. The semantics of the Java byte codes interpreted by the Card JVM **16** are described in the aforementioned Java Virtual Machine Specification. The subset of byte codes interpreted by the Card JVM **16** can be found in Appendix C. The card class file converter **26** checks the Java application **20** to ensure use of only the features available in this subset and converts into a form that is understood and interpreted by the Card JVM **16**.

In other embodiments, the Card JVM **16** is designed to interpret a different set or augmented set of byte codes **116**. Although a different byte code set might lead to some performance improvements, departing from a strict Java subset may not be desirable from the point of view of security that is present in the original Java byte codes or compatibility with mainstream Java development tools.

All Card JVM **16** applications **126** have a defined entry point denoted by a class and a method in the class. This entry point is mapped in the string to ID input map **30** and assigned by the card class file converter **26**. Classes, methods and fields within a Java application **20** are assigned IDs by the card class file converter **26**. For example, the ID corresponding to the main application class may be defined as **F001** and the ID corresponding to its main method, such as "main(V)" could be defined as **F002**.

The overall execution architecture of the Card JVM is described by the flowchart in FIG. **15**. Execution of the Card JVM **16** begins at the execution control **120**, which chooses a card application **126z** to execute. It proceeds by finding and assigning an entry point **152** (a method) in this card application for the Card JVM **16** to interpret. The Card JVM **16** interprets the method **153**. If the interpretation proceeds successfully **154**, the Card JVM **16** reports success **155** returning control back to the execution control **120**. If in the course of interpretation **153** the Card JVM **16** encounters an unhandled error or exception (typically a resource limitation or a security violation), the Card JVM **16** stops **156** and reports the appropriate error to the terminal **14**.

An essential part of the Card JVM **16** is a subroutine that handles the execution of the byte codes. This subroutine is described by the flowchart in FIG. **16**. Given a method **160** it executes the byte codes in this method. The subroutine starts by preparing for the parameters of this method **161**. This involves setting the VM stack **144a** pointer, VM stack **144a** frame limits, and setting the program counter to the first byte code of the method.

Next, the method flags are checked **162**. If the method is flagged native, then the method is actually a call to native

14

method code (subroutine written in the microcontroller's native processor code). In this case, the Card JVM **16** prepares for an efficient call **163** and return to the native code subroutine. The parameters to the native method may be passed on the VM stack **144a** or via the System stack **148**. The appropriate security checks are made and the native method subroutine is called. On return, the result (if any) of the native method subroutine is placed on the VM stack **144a** so that it may be accessed by the next byte code to be executed.

The dispatch loop **164** of the Card JVM **16** is then entered. The byte code dispatch loop is responsible for preparing, executing, and retiring each byte code. The loop terminates when it finishes interpreting the byte codes in the method **160**, or when the Card JVM **16** encounters a resource limitation or a security violation.

If a previous byte code caused a branch to be taken **165** the Card JVM prepares for the branch **165a**. The next byte code is retrieved **165b**. In order to keep the cost of processing each byte code down, as many common elements such as the byte code arguments, length, type are extracted and stored.

To provide the security offered by the security model of the programming language, byte codes in the class file must be verified and determined conformant to this model. These checks are typically carried out in prior art by a program referred to as the byte code verifier, which operates in four passes as described in the Java Virtual Machine Specification. To offer the run-time security that is guaranteed by the byte code verifier, the Card JVM **16** must perform the checks that pertain to the Pass 3 and Pass 4 of the verifier. This checking can be bypassed by the Card JVM **16** if it can be guaranteed (which is almost impossible to do) that the byte codes **60** interpreted by the Card JVM **16** are secure. At the minimum, code security can be maintained as long as object references cannot be faked and the VM stack **144a** and local variable bounds are observed. This requires checking the state of the VM stack **144a** with respect to the byte code being executed.

To enforce the security model of the programming language, a 256-byte table is created as shown in Appendix G which is hereby incorporated by reference. This table is indexed by the byte code number. This table contains the type and length information associated with the indexing byte code. It is encoded with the first 5 bits representing type, and the last 3 bits representing length. The type and length of the byte code is indexed directly from the table by the byte code number. This type and length is then used for checking as shown in Appendix H which is hereby incorporated by reference. In Appendix H, the checking process begins by decoding the length and type from the table in Appendix G which is hereby incorporated by reference. The length is used to increment the program counter. The type is used first for pre-execution checking, to insure that the data types on the VM stack **144a** are correct for the byte code that is about to be executed. The 256 bytes of ROM for table storage allows the original Java byte codes to be run in the Card JVM **16** and minimizes the changes required to the Java class file to be loaded in the card. Additional Java byte codes can be easily supported since it is relatively easy to update the appropriate table entries.

In other embodiments, as shown in FIG. **10**, the Java byte codes in the method are renumbered in such a manner that the byte code type and length information stored in the table in Appendix H is implicit in the reordering. Appendix H is hereby incorporated by reference. Consequently, the checks

US 6,308,317 B1

15

that must be performed on the state of the VM stack **144a** and the byte code being processed does not have to involve a table look up. The checks can be performed by set of simple comparisons as shown in Appendix I which is hereby incorporated by reference. This embodiment is preferable when ROM space is at a premium, since it eliminates a 256-byte table. However adding new byte codes to the set of supported byte codes has to be carefully thought out since the new byte codes have to fit in the implicit numbering scheme of the supported byte codes.

In another embodiment, the Card JVM **16** chooses not to perform any security checks in favor of Card JVM **16** execution speed. This is illustrated in the flowchart in FIG. **18**. The flow chart in FIG. **18** is the same as that of FIG. **16** with the security checks removed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

The Card JVM **16** may enforce other security checks as well. If the byte code may reference a local variable, the Card JVM **16** checks if this reference is valid, throwing an error if it is not. If the reference is valid, the Card JVM **16** stores the type of the local variable for future checking. The VM stack **144a** pointer is checked to see if it is still in a valid range. If not an exception is thrown. The byte code number is checked. If it is not supported, an exception is thrown.

Finally, the byte code itself is dispatched **165d**. The byte codes translated by the Card JVM **16** are listed in Appendix C. The semantics of the byte codes are described in the aforementioned Java Virtual Machine Specification with regard to the state of the VM stack **144a** before and after the dispatch of the byte code. Note also that some byte codes (the byte codes, **INVOKESTATIC**, **INVOKESPECIAL**, **INVOKENONVIRTUAL** and **INVOKEVIRTUAL**) may cause reentry into the Card JVM **16**, requiring processing to begin at the entry of the subroutine **161**. FIG. **17** shows the flowchart of the byte code execution routine. The routine is given a byte code **171** to execute. The Card JVM **16** executes **172** the instructions required for the byte code. If in the course of executing the Card JVM **16** encounters a resource limitation **173**, it returns an error **156**. This error is returned to the terminal **16** by the Card JVM **16**. If the byte code executes successfully, it returns a success **175**.

After execution, the type of the result is used to set the VM stack **144a** state correctly **165e**, properly flagging the data types on the VM stack **144a**. The byte code information gathered previously **165b** from the byte code info table is used to set the state of the VM stack **144a** in accordance with the byte code that just executed.

In other embodiments, setting the output state of the VM stack **144a** with respect to the byte code executed is simplified if the byte code is renumbered. This is shown in Appendix I which is hereby incorporated by reference.

In yet another embodiment, the Card JVM **16** may bypass setting the output state of the VM stack **144a** in favor of Card JVM **16** execution speed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

After the byte code has been executed, the byte code is retired **165f**. This involves popping arguments off the VM stack **144a**. Once byte code processing is completed, the loop **164** is repeated for the next byte code for the method.

Once the dispatch loop **164** terminates, the VM stack **144a** is emptied **166**. This prevents any object references filtering down to other Card JVM **16** invocations and breaking the Card JVM's **16** security. Termination **167** of the byte code dispatch loop **164** indicates that the Card JVM **16** has completed executing the requested method.

16

To isolate data and applications in the integrated circuit card **10** from each other, the integrated circuit card **10** relies on the firewall mechanism **149** provided by the Card JVM **16**. Because the Card JVM implements the standard pass **3** and pass **4** verifier checks, it detects any attempt by an application to reference the data or code space used by another application, and flag a security error **156**. For example, conventional low level applications can cast non-reference data types into references, thereby enabling access to unauthorized memory space, and violating security. With this invention, such an attempt by a card application **126z** to use a non-reference data type as a reference will trigger a security violation **156**. In conventional Java, this protected application environment is referred to as the sandbox application-interpretation environment.

However, these firewall facilities do not work independently. In fact, the facilities are overlapping and mutually reinforcing with conventional access control lists and encryption mechanisms shown in the following table:

	Access Control Lists	Virtual Machine	Encryption
Data Protection	access control before operation	access only to own namespace	data to another program encrypted
Program Protection	access control before execution	execution only on correct types	data encrypted in program's namespace
Communication Protection	access control on channels	channel controls in own namespace	only mutually authenticated parties can communicate

Taken together, these facilities isolate both data and applications on the integrated circuit card **10** and ensure that each card application **126** can access only the authorized resources of the integrated circuit card **10**.

Referring to FIG. **19**, card applications **126x**, **126y**, **126z** can be endowed with specific privileges when the card applications **126** execute. These privileges determine, for example, which data files the card applications **126** can access and what operations the card applications **126** can perform on the file system **147**. The privileges granted to the card applications **126** are normally set at the time that a particular card application **126z** is started by the user, typically from the terminal **14**.

The integrated circuit card **10** uses cryptographic identification verification methods to associate an identity **190** (e.g., identities **190a**, **190b** and **190c**) and hence, a set of privileges to the execution of the card application **126**. The association of the specific identity **190c** to the card application **126z** is made when the card application **126z** begins execution, thus creating a specific running application **200**, as shown in FIG. **20**. The identity **190** is a unique legible text string reliably associated with an identity token. The identity token (e.g., a personal identification number (PIN) or a RSA private key) is an encryption key.

Referring to FIG. **20**, in order to run a specific card application **126z**, the identity **190c** of the card application **126z** must be authenticated. The identity **190c** is authenticated by demonstrating knowledge of the identity token associated with the identity **190c**. Therefore, in order to run the card application **126z**, an agent (e.g., a card holder or

US 6,308,317 B1

17

another application wishing to run the application) must show that it possesses or knows the application's identity-defining encryption key.

One way to demonstrate possession of an encryption key is simply to expose the key itself. PIN verification is an example of this form of authentication. Another way to demonstrate the possession of an encryption key without actually exposing the key itself is to show the ability to encrypt or decrypt plain text with the key.

Thus, a specific running application **200** on the integrated circuit card **10** includes a card application **126z** plus an authenticated identity **190c**. No card application **126** can be run without both of these elements being in place. The card application **126z** defines data processing operations to be performed, and the authenticated identity **190c** determines on what computational objects those operations may be performed. For example, a specific application **126z** can only access identity C's files **202** in the file system **147** associated with the specific identity **190c**, and the specific card application **126z** cannot access other files **204** that are associated with identities other than the specific identity **190c**.

The integrated circuit card **10** may take additional steps to ensure application and data isolation. The integrated circuit card **10** furnishes three software features sets: authenticated-identity access control lists; a Java-based virtual machine; and one-time session encryption keys to protect data files, application execution, and communication channels, respectively. Collectively, for one embodiment, these features sets provide the application data firewalls **149** for one embodiment. The following discusses each software feature set and then shows how the three sets work together to insure application and data isolation on the integrated circuit card **10**.

An access control list (ACL) is associated with every computational object (e.g., a data file or a communication channel) on the integrated circuit card **10** that is protected, i.e., to which access is to be controlled. An entry on an ACL (for a particular computational object) is in a data format referred to as an e-tuple:

type:identity:permissions

The type field indicates the type of the following identity (in the identity field), e.g., a user (e.g., "John Smith"), or a group. The permissions field indicates a list of operations (e.g., read, append and update) that can be performed by the identity on the computational object.

As an example, for a data file that has the ACL entry:

USER:AcmeAirlines:RAU,

any application whose identity is "AcmeAirlines" can read ("R"), append ("A") and update ("U") the data file. In addition, the ACL may be used selectively to permit the creation and deletion of data files. Furthermore, the ACL may be used selectively to permit execution of an application.

Whenever a computational object is accessed by a running application **200**, the access is intercepted by the Card JVM **16** and passed to the card operating system **122**, which determines if there is an ACL associated with the object. If there is an associated ACL, then the identity **190c** associated with the running application **200** is matched on the ACL. If the identity is not found or if the identity is not permitted for the type of access that is being requested, then the access is denied. Otherwise, the access is allowed to proceed.

Referring to FIG. **13**, to prevent the potential problems due to the single data path between the integrated circuit card **10** and the terminal **14**, communication channel isola-

18

tion is accomplished by including in the identity authentication process the exchange of a one-time session key **209** between the card application **126z** and the terminal application **136**. The key **209** is then used to encrypt subsequent traffic between the authenticating terminal application **136** and the authenticated card application **126z**. Given the one-time session key **209**, a rogue terminal application can neither "listen in" on an authenticated communication between the terminal **14** and the integrated circuit card **10**, nor can the rogue terminal application "spoof" the card application into performing unauthorized operations on its behalf.

Encryption and decryption of card/terminal traffic can be handled either by the card operating system **122** or by the card application itself **126z**. In the former case, the communication with the terminal **14** is being encrypted transparently to the application, and message traffic arrives decrypted in the data space of the application. In the latter case, the card application **126z** elects to perform encryption and decryption to provide an extra layer of security since the application could encrypt data as soon as it was created and would decrypt data only when it was about to be used. Otherwise, the data would remain encrypted with the session key **209**.

Thus, the application firewall includes three mutually reinforcing software sets. Data files are protected by authenticated-identity access control lists. Application execution spaces are protected by the Card JVM **16**. Communication channels are protected with one-time session encryption keys **209**.

In other embodiments, the above-described techniques are used with a microcontroller (such as the processor **12**) may control devices (e.g., part of an automobile engine) other than an integrated circuit card. In these applications, the microcontroller provides a small platform (i.e., a central processing unit, and a memory, both of which are located on a semiconductor substrate) for storing and executing high level programming languages. Most existing devices and new designs that utilize a microcontroller could use this invention to provide the ability to program the microcontroller using a high level language, and application of this invention to such devices is specifically included.

The term application includes any program, such as Java applications, Java applets, Java aglets, Java servlets, Java comlets, Java components, and other non-Java programs that can result in class files as described below.

Class files may have a source other than Java program files. Several programming languages other than Java also have compilers or assemblers for generating class files from their respective source files. For example, the programming language Eiffel can be used to generate class files using Pirmin Kalberer's "J-Eiffel", an Eiffel compiler with JVM byte code generation (web site: <http://www.spin.ch/~kalberer/jive/index.htm>). An Ada **95** to Java byte code translator is described in the following reference (incorporated herein by reference): Taft, S. Tucker, "Programming the Internet in Ada **95**", proceedings of Ada Europe '96, 1996. Jasmin is a Java byte code assembler that can be used to generate class files, as described in the following reference (incorporated herein by reference): Meyer, Jon and Troy Downing, "Java Virtual Machine", O'Reilly, 1997. Regardless of the source of the class files, the above description applies to languages other than Java to generate codes to be interpreted.

FIG. **21** shows an integrated circuit card, or smart card, which includes a microcontroller **210** that is mounted to a plastic card **212**. The plastic card **212** has approximately the

US 6,308,317 B1

19

same form factor as a typical credit card. The communicator **12a** can use a contact pad **214** to establish a communication channel, or the communicator **12a** can use a wireless communication system.

In other embodiments, a microcontroller **210** is mounted into a mobile or fixed telephone **220**, effectively adding smart card capabilities to the telephone, as shown in FIG. **22**. In these embodiments, the microcontroller **210** is mounted on a module (such as a Subscriber Identity Module (SIM)), for insertion and removal from the telephone **220**.

In other embodiments, a microcontroller **210** is added to a key ring **230** as shown in FIG. **23**. This can be used to secure access to an automobile that is equipped to recognize the identity associated with the microcontroller **210** on the key ring **230**.

Jewelry such as a watch or ring **240** can also house a microcontroller **210** in an ergonomic manner, as shown in FIG. **24**. Such embodiments typically use a wireless communication system for establishing a communication channel, and are a convenient way to implement access control with a minimum of hassle to the user.

FIG. **25** illustrates a microcontroller **210** mounted in an electrical subsystem **252** of an automobile **254**. In this embodiment, the microcontroller is used for a variety of purposes, such as to controlling access to the automobile, (e.g. checking identity or sobriety before enabling the ignition system of the automobile), paying tolls via wireless communication, or interfacing with a global positioning system (GPS) to track the location of the automobile, to name a few.

While specific embodiments of the present invention have been described, various modifications and substitutions will become apparent to one skilled in the art by this disclosure. Such modifications and substitutions are within the scope of the present invention, and are intended to be covered by the appended claims.

What is claimed is:

1. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including at least one step selected from a group consisting of recording all jumps and their destinations in the original byte codes; converting specific byte codes into equivalent generic byte codes or vice-versa; modifying byte code operands from references using identifying strings to references using unique identifiers; and renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

20

2. The integrated circuit card of claim **1**, wherein the high level programming language format comprises a class file format.

3. The integrated circuit card of claim **1** wherein the processor comprises a microcontroller.

4. The integrated circuit card of claim **1** wherein at least a portion of the memory is located in the processor.

5. The integrated circuit card of claim **1** wherein the high level programming language format comprises a Java programming language format.

6. The integrated circuit card of claim **1**, wherein the application has been processed from a second application having a plurality of program elements, at least one being a string of characters, and

wherein in the first application the string of characters is replaced with an identifier.

7. The integrated circuit card of claim **6**, wherein the identifier comprises an integer.

8. The integrated circuit card of claim **1** wherein the processor is further configured to:

receive a request from a requester to access an element of the card;

after receipt of the request, interact with the requester to authenticate an identity of the requester; and

based on the identity, selectively grant access to the element.

9. The integrated circuit card of claim **8**, wherein the requester comprises the processor.

10. The integrated circuit card of claim **8**, wherein the requester comprises the terminal.

11. The integrated circuit card of claim **8**, wherein the element comprises the application stored in the memory, and

once access is allowed, the requester is configured to use the application.

12. The integrated circuit card of claim **8**, wherein the element comprises another application stored in the memory.

13. The integrated circuit card of claim **8**, wherein the element includes data stored in the memory.

14. The integrated circuit card of claim **8** wherein the element comprises the communicator.

15. The integrated circuit card of claim **8**, wherein the memory also stores an access control list for the element, the access control list furnishing an indication of types of access to be granted to the identity, the processor further configured to:

based on the access control list, selectively grant specific types of access to the requester.

16. The integrated circuit card of claim **15** wherein the types of access include reading data.

17. The integrated circuit card of claim **15** wherein the types of access include writing data.

18. The integrated circuit card of claim **15** wherein the types of access include appending data.

19. The integrated circuit card of claim **15** wherein the types of access include creating data.

20. The integrated circuit card of claim **15** wherein the types of access include deleting data.

21. The integrated circuit card of claim **15** wherein the types of access include executing an application.

22. The integrated circuit card of claim **1**, wherein the application is one of a plurality of applications stored in the memory, the processor is further configured to:

receive a request from a requester to access one of the plurality of applications;

US 6,308,317 B1

21

after receipt of the request, determine whether said one of the plurality of applications complies with a predetermined set of rules; and

based on the determination, selectively grant access to the requester to said one of the plurality of applications. 5

23. The integrated circuit card of claim 22, wherein the predetermined rules provide a guide for determining whether said one of the plurality of applications accesses a predetermined region of the memory.

24. The integrated circuit card of claim 22, wherein the processor is further configured to: 10

authenticate an identity of the requester; and
grant access to said one of the plurality of applications based on the identity.

25. The integrated circuit card of claim 1, wherein the processor is further configured to: 15

interact with the terminal via the communicator to authenticate an identity; and
determine if the identity has been authenticated; and
based on the determination, selectively allow communication between the terminal and the integrated circuit card. 20

26. The integrated circuit card of claim 25, wherein the communicator and the terminal communicate via communication channels, the processor further configured to assign one of the communication channels to the identity when the processor allows the communication between the terminal and the integrated circuit card. 25

27. The integrated circuit card of claim 26, wherein the processor is further configured to: 30

assign a session key to said one of the communication channels, and

use the session key when the processor and the terminal communicate via said one of the communication channels. 35

28. The integrated circuit card of claim 1, wherein the terminal has a card reader and the communicator comprises a contact for communicating with the card reader.

29. The integrated circuit card of claim 1, wherein the terminal has a wireless communication device and the communicator a wireless transceiver for communicating with the wireless communication device. 40

30. The integrated circuit card of claim 1, wherein the terminal has a wireless communication device and the communicator comprises a wireless transmitter for communicating with the wireless communication device. 45

31. A method for use with an integrated circuit card and a terminal, comprising: 50

storing an interpreter operable to interpret programs derived from programs written in a high level programming language and an application derived from a program written in a high level programming language format in a memory of the integrated circuit card wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including at least one step selected from a group consisting of
recording all jumps and their destinations in the original byte codes; 55

converting specific byte codes into equivalent generic byte codes or vice-versa;

modifying byte code operands from references using identifying strings to references using unique identifiers; and 60

22

renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

using a processor of the integrated circuit card to use the interpreter to interpret the application for execution; and

using a communicator of the card when communicating between the processor and the terminal.

32. The method of claim 31, wherein the high level programming language format comprises a class file format.

33. The method of claim 31, wherein the processor comprises a microcontroller.

34. The method of claim 31, wherein at least a portion of the memory is located in the processor.

35. The method of claim 31, wherein the high level programming language format comprises a Java programming language format.

36. The method of claim 31, wherein

the application has been processed from a second application having a plurality of program elements, at least one being a string of characters, further comprising:
replacing the string of characters in the first application with an identifier.

37. The method of claim 36, wherein the identifier includes an integer.

38. The method of claim 31, further comprising:

receiving a request from a requester to access an element of the card;

after receipt of the request, interacting with the requester to authenticate an identity of the requester; and
based on the identity, selectively granting access to the element.

39. The method of claim 38, wherein the requester comprises the processor.

40. The method of claim 38, wherein the requester comprises the terminal.

41. The method of claim 38, wherein the element comprises the application stored in the memory, further comprising: 40

once access is allowed, using the application with the requester.

42. The method of claim 38, wherein the element comprises another application stored in the memory.

43. The method of claim 38, wherein the element includes data stored in the memory.

44. The method of claim 38, wherein the element comprises the communicator.

45. The method of claim 38, wherein the memory also stores an access control list for the element, the access control list furnishing an indication of types of access to be granted to the identity, further comprising: 45

based on the access control list, using the processor to selectively grant specific types of access to the requester.

46. The method of claim 45, wherein the types of access include reading data.

47. The method of claim 45, wherein the types of access include writing data.

48. The method of claim 45, wherein the types of access include appending data.

49. The method of claim 45, wherein the types of access include creating data.

50. The method of claim 45, wherein the types of access include deleting data.

51. The method of claim 45, wherein the types of access including executing an application.

US 6,308,317 B1

23

52. The method of claim **31**, wherein the application is one of a plurality of applications stored in the memory, further comprising:

receiving a request from a requester to access one of the applications stored in the memory;
upon receipt of the request, determining whether said one of the plurality of applications complies with a predetermined set of rules; and
based on the determining, selectively granting access to the said one of the plurality of applications.

53. The method of claim **52**, wherein the predetermined rules provide a guide for determining whether said one of the plurality of applications accesses a predetermined region of the memory.

54. The method of claim **52**, further comprising:
authenticating an identity of the requester; and
based on the identity, granting access to said one of the plurality of applications.

55. The method of claim **31**, further comprising:
communicating with the terminal to authenticate an identity;
determining if the identity has been authenticated; and
based on the determining, selectively allowing communication between the terminal and the integrated circuit card.

56. The method of claim **55**, further comprising:
communicating between the terminal and the processor via communication channels; and
assigning one of the communication channels to the identity when the allowing allows communication between the card reader and the integrated circuit card.

57. The method of claim **56**, further comprising:
assigning a session key to said one of the communication channels; and
using the session key when the processor and the terminal communicate via said one of the communication channels.

58. A microcontroller comprising:
a memory storing:
a derivative application derived from an application having a class file format wherein the application is derived from an application having a class file format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, the converting step including at least one step selected from a group consisting of
recording all jumps and their destinations in the original byte codes;
converting specific byte codes into equivalent generic byte codes or vice-versa;
modifying byte code operands from references using identifying strings to references using unique identifiers; and
renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation, and
an interpreter configured to interpret applications derived from applications having a class file format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the derivative application for execution.

59. The microcontroller of claim **58**, further comprising:
a communicator configured to communicate with a terminal.

24

60. The microcontroller of claim **59**, wherein the terminal has a card reader and the communicator comprises a contact for communicating with the card reader.

61. The microcontroller of claim **59**, wherein the terminal has a wireless communicator and a wireless transceiver for communicating with the wireless communication device.

62. The microcontroller of claim **59**, wherein the terminal has a wireless communication device and the communicator comprises a wireless transmitter for communicating with the wireless communication device.

63. The microcontroller of claim **58**, wherein the class file format comprises a Java class file format.

64. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:
applications, each application derived from applications having a high level programming language format, and

an interpreter operable to interpret applications derived from applications having a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including at least one step selected from a group consisting of
recording all jumps and their destinations in the original byte codes;
converting specific byte codes into equivalent generic byte codes or vice-versa;
modifying byte code operands from references using identifying strings to references using unique identifiers; and
renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

a processor coupled to the memory, the processor configured to:

a.) use the interpreter to interpret the applications for execution,
b.) use the interpreter to create a firewall to isolate the applications from each other, and
c.) use the communicator to communicate with the terminal.

65. A microcontroller having a set of resource constraints and comprising:

a memory, and

an interpreter loaded in memory and operable within the set of resource constraints, the microcontroller having:
at least one application loaded in the memory to be interpreted by the interpreter, wherein the at least one application is generated by a programming environment comprising:

a) a compiler for compiling application source programs written in high level language source code form into a compiled form, and

b) a converter for post processing the compiled form into a minimized form suitable for interpretation within the set of resource constraints by the interpreter, wherein the converter comprises means for translating from the byte codes in the compiled form to byte codes in a format suitable for interpretation by the interpreter by:

US 6,308,317 B1

25

a) using at least one step in a process including the steps:

- a.1) recording all jumps and their destinations in the original byte codes;
- a.2) converting specific byte codes into equivalent generic byte codes or vice-versa;
- a.3) modifying byte code operands from references using identifying strings to references using unique identifiers; and
- a.4) renumbering byte codes in the compiled form to equivalent byte codes in the format suitable for interpretation; and

b) relinking jumps for which destination address is effected by conversion step a.1, a.2, a.3, or a.4.

66. The microcontroller of claim 65, wherein the compiled form includes attributes, and the converter comprises a means for including attributes required by the interpreter while not including the attributes not required by the interpreter.

67. The microcontroller of claim 65 wherein the compiled form is in a standard Java class file format and the converter accepts as input the compiled form in the standard Java class file format and produces output in a form suitable for interpretation by the interpreter.

68. The microcontroller of claim 65 wherein the compiled form includes associating an identifying string for objects, classes, fields, or methods, and the converter comprises a means for mapping such strings to unique identifiers.

69. The microcontroller of claim 68 wherein each unique identifier is an integer.

70. The microcontroller of claim 68 wherein the mapping of strings to unique identifiers is stored in a string to identifier map file.

71. The microcontroller of claim 65 where in the high level language supports a first set of features and a first set of data types and the interpreter supports a subset of the first set of features and a subset of the first set of data types, and wherein the converter verifies that the compiled form only contains features in the subset of the first set of features and only contains data types in the subset of the first set of data types.

72. The microcontroller of claim 65 wherein the application program is compiled into a compiled form for which resources required to execute or interpret the compiled form exceed those available on the microcontroller.

73. The microcontroller of claim 65 wherein the compiled form is designed for portability on different computer platforms.

74. The microcontroller of claim 65 wherein the interpreter is further configured to determine, during an interpretation of an application, whether the application meets a security criteria selected from a set of rules containing at least one rule selected from the set:

not allowing the application access to unauthorized portions of memory,

not allowing the application access to unauthorized microcontroller resources,

wherein the application is composed of byte codes and checking a plurality of byte codes at least once prior to execution to verify that execution of the byte codes does not violate a security constraint.

75. The microcontroller of claim 65 wherein at least one application program is generated by a process including the steps of:

prior to loading the application verifying that the application does not violate any security constraints; and loading the application in a secure manner.

26

76. The microcontroller of claim 75 wherein the step of loading in a secure manner comprises the step of: verifying that the loading identity has permission to load applications onto the microcontroller.

77. The microcontroller of claim 75 wherein the step of loading in a secure manner comprises the step of: encrypting the application to be loaded using a loading key.

78. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

inputting an application program in a first programming language;

compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code, wherein the step of converting comprises:

at least one of the steps of:

a) recording all jumps and their destinations in the original byte codes;

b) converting specific byte codes into equivalent generic byte codes or vice-versa;

c) modifying byte code operands from references using identifying strings to references using unique identifiers; and

d) renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

relinking jumps for which destination address is effected by conversion step a), b), c), or d);

wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and

loading the second intermediate code into the memory of the microcontroller.

79. The method of programming a microcontroller of claim 78 wherein the step of converting further comprises: associating an identifying string for objects, classes, fields, or methods; and

mapping such strings to unique identifiers.

80. The method of claim 79 wherein the step of mapping comprises the step of mapping strings to integers.

81. The method of claim 80 wherein the step of loading the second intermediate code into the memory of the microcontroller further comprises checking the second intermediate code prior to loading the second intermediate code to verify that the second intermediate code meets a predefined integrity check and that loading is performed according to a security protocol.

82. The method of claim 81 wherein the security protocol requires that a particular identity must be validated to permit loading prior to the loading of the second intermediate code.

83. The method of claim 81 further characterized by providing a decryption key and wherein the security protocol requires that the second intermediate code is encrypted using a loading key corresponding to the decryption key.

84. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including the steps of: 5
 modifying byte code operands from references using identifying strings to references using unique identifiers; 10
 recording all jumps and their destinations in the original byte codes;
 converting specific byte codes into equivalent generic byte codes or vice-versa; and
 renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and 15
 an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and 20

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

85. A method for use with an integrated circuit card and a terminal, comprising:

storing an interpreter operable to interpret programs derived from programs written in a high level programming language and an application derived from a program written in a high level programming language format in a memory of the integrated circuit card wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including:

modifying byte code operands from references using identifying strings to references using unique identifiers; 40
 recording all jumps and their destinations in the original byte codes;
 converting specific byte codes into equivalent generic byte codes or vice-versa; and
 renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; 45

using a processor of the integrated circuit card to use the interpreter to interpret the application for execution; and

using a communicator of the card when communicating between the processor and the terminal. 50

86. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal; 55

a memory storing:

applications, each application derived from applications having a high level programming language format, and

an interpreter operable to interpret applications derived from applications having a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including the steps of: 5
 modifying byte code operands from references using identifying strings to references using unique identifiers; 10
 recording all jumps and their destinations in the original byte codes;
 converting specific byte codes into equivalent generic byte codes or vice-versa; and
 renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and 15

a processor coupled to the memory, the processor configured to:

- a.) use the interpreter to interpret the applications for execution,
- b.) use the interpreter to create a firewall to isolate the applications from each other, and
- c.) use the communicator to communicate with the terminal.

87. A microcontroller comprising:

a memory storing:

a derivative application derived from an application having a class file format wherein the application is derived from an application having a class file format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, the converting step including:

recording all jumps and their destinations in the original byte codes; 40
 converting specific byte codes into equivalent generic byte codes or vice-versa; and
 renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation, and 45

an interpreter configured to interpret applications derived from applications having a class file format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the derivative application for execution.

(12) **EX PARTE REEXAMINATION CERTIFICATE (6546th)**
United States Patent (10) Number: **US 6,308,317 C1**
Wilkinson et al. (45) Certificate Issued: **Dec. 2, 2008**

- (54) **USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER**
- (75) Inventors: **Timothy J. Wilkinson**, London (GB);
Scott B. Guthery, Belmont, MA (US);
Ksheerabdh Krishna, Cedar Park, TX (US);
Michael A. Montgomery, Cedar Park, TX (US)

5,457,799 A	10/1995	Srivastava
5,469,572 A	11/1995	Taylor
5,590,331 A	12/1996	Lewis et al.
5,668,999 A	9/1997	Gosling
5,915,226 A	6/1999	Martineau
5,923,884 A	7/1999	Peyret et al.

- (73) Assignee: **Schlumberger Technologies, Inc.**,
 Austin, TX (US)

Reexamination Request:
 No. 90/008,178, Sep. 29, 2006

Reexamination Certificate for:
 Patent No.: **6,308,317**
 Issued: **Oct. 23, 2001**
 Appl. No.: **08/957,512**
 Filed: **Oct. 24, 1997**

Related U.S. Application Data

- (60) Provisional application No. 60/029,057, filed on Oct. 25, 1996.
- (51) **Int. Cl.**
G06F 9/46 (2006.01)
G06F 9/445 (2006.01)
G06F 9/455 (2006.01)
G06F 9/45 (2006.01)
G07F 7/10 (2006.01)
H04L 29/06 (2006.01)

- (52) **U.S. Cl.** **717/139; 717/141; 717/146**
- (58) **Field of Classification Search** **717/139, 717/5, 141, 146**
 See application file for complete search history.

- (56) **References Cited**
U.S. PATENT DOCUMENTS
 5,367,685 A 11/1994 Gosling

OTHER PUBLICATIONS


“Java Intermediate Bytecodes”, ACM SIGPLAN Workshop, IR '95, J. Gosling, 1995 ACM.*
 W.M. McKeeman, Peephole Optimization, Communications of the ACM, vol. 8, No. 7 (Jul. 1965), pp. 443-444.
 Leon Presser and John R. White, Linkers and Loaders, Computing Surveys, vol. 4, No. 3 (Sep. 1972), pp. 151.
 Jerome H. Saltzer and Michael D. Schroeder, The Protection of Information in Computer Systems, Communications of the ACM, vol. 17, No. 7 (Jul. 1974), Glossary, Section II.C.
 W.M. Waite, Assembly and Linkage, in F.L. Bauer and J. Eickel, eds., Compiler Construction: An Advanced Course (2d ed. 1976), pp. 339-342, Springer-Verlag, Berlin.
 W.M. Waite, Optimization, in F.L. Bauer and J. Eickel, eds., Compiler Construction: An Advanced Course (2d ed. 1976), pp. 551-600, Springer-Verlag, Berlin.
 P.M. Lewis II, D.J. Rosenkrantz, R.E. Stearns, Compiler Design Theory (1976), pp. 559-568, Addison-Wesley, Reading.
 B.W. Kernighan and M.D. McIlroy, UNIX Programmer's Manual, Bell Telephone laboratories, Inc., Murray Hill (7th ed., 1979), Sections LD(1), MEM(4), and A.OUT(5).

(Continued)

Primary Examiner—Fred Ferris

(57) **ABSTRACT**

An integrated circuit card is used with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.

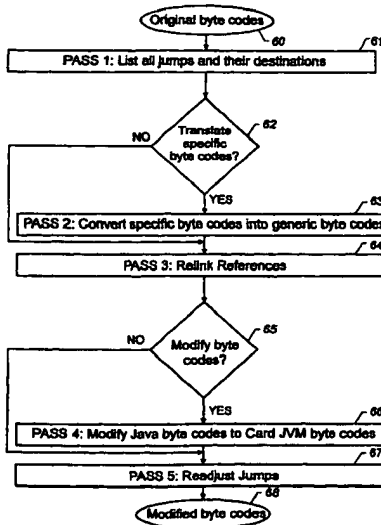

US 6,308,317 C1

Page 2

OTHER PUBLICATIONS

A.S. Tanenbaum et al., Using Peephole Optimization on Intermediate Code, *ACM Transactions on Programming Languages and Systems*, vol. 4, No. 1 (Jan. 1982), pp. 26–35.

Andrew S. Tanenbaum, *Structured Computer Organization* (3d ed. 1990), pp. 397–428, Prentice Hall, Englewood Cliffs. ISO/IEC standard 7816–4 (1st ed. 1995).

Patrice Peyret, *Application–Enabling Card Systems with Plug–and–Play Applets*, 1996 Smart Card Convention, Quality Marketing, Peterborough, U.K. (Feb. 1996), pp. 51–71.

Tim Lindholm and Frank Yellin, *The Java Virtual Machine Specification*, (1st ed., Sep. 1996), Chapters 2–16, 9, Addison–Wesley, Reading.

Leon Presser and John R. White, *Linkers and Loaders*, *Computing Surveys*, vol. 4, No. 3 (Sep. 1972), p. 151.

W.M. Waite, *Assembly and Linkage*, In F.L. Bauer and J. Eickel, eds., *Compiler Construction: An Advanced Course* (2d ed. 1976), pp. 339–342.

P.M. Lewis II, D.J. Rosenkrantz, R.E. Stearns, *Compiler Design Theory* (1976), pp. 559–568.

B.W. Kernighan and M.D. McIlroy, *UNIX Programmer’s Manual*, Bell Telephone Laboratories, Inc., Murray Hill (7th ed., 1979), Section LD(1), MEM(4), and A.OUT(5).

Andrew S. Tanenbaum et al., Using Peephole Optimization on Intermediate Code, *ACM Transactions on Programming Languages and Systems*, vol. 4, No. 1 (Jan. 1982), pp. 26–35.

Andrew S. Tanenbaum, *Structured Computer Organization* (3d ed. 1990), pp. 397–428.

Patrice Peyret, *Application–Enabling Card Systems with Plug–and–Play Applets*, 1996 Smart Card Convention, Peterborough, UK (Feb. 1996), pp. 51–71.

Tim Lindholm and Frank Yellin, *The Java Virtual Machine Specification*, Addison–Wesley, (1st ed., Sep. 1996), Chapters 1, 2, 3 and 9.

* cited by examiner

US 6,308,317 C1

1

EX PARTE
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 307

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

Claims 1, 31, 58, 64, 65, 78 and 84-87 are determined to be patentable as amended.

Claims 2-30, 32-57, 59-63, 66-77 and 79-83, dependent on an amended claim, are determined to be patentable.

New claims 88-94 are added and determined to be patentable.

1. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step [including at least one step selected from a group consisting of] *comprising*:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation selected from the group:

converting specific byte codes into equivalent generic byte codes [or vice-versa];

modifying byte code operands from references using identifying strings to references using unique identifiers; and

renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and

relinking jumps for which the destination address is affected by the conversion operation; and

an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

31. A method for use with an integrated circuit card and a terminal comprising:

storing an interpreter operable to interpret programs derived from programs written in a high level programming language and an application derived from a program written in a high level programming language for-

2

mat in a memory of the integrated circuit card wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step [including at least one step selected from a group consisting of] *comprising*:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation selected from the group:

converting specific byte codes into equivalent generic byte codes [or vice-versa];

modifying byte code operands from references using identifying strings to references using unique identifiers; and

renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and

relinking jumps for which the destination address is affected by the conversion operation; and

using a processor of the integrated circuit card to use the interpreter to interpret the application for execution; and

using a communicator of the card when communicating between the processor and the terminal.

58. A microcontroller comprising:

a memory storing:

a derivative application derived from an application having a class file format wherein the application is derived from an application having a class file format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, the converting step [including at least one step selected from a group consisting of] *comprising*:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation selected from the group:

converting specific byte codes into equivalent generic byte codes [or vice-versa];

modifying byte code operands from references using identifying strings to references using unique identifiers; and

renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*, and

relinking jumps for which the destination address is affected by the conversion operation; and

an interpreter configured to interpret applications derived from applications having a class file format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the derivative application for execution.

64. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

applications, each application derived from applications having a high level programming language format, and

US 6,308,317 C1

3

an interpreter operable to interpret applications derived from applications having a high level programming language format wherein [the] *each* application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step [including at least one step selected from a group consisting of] *comprising*:

- recording all jumps and their destinations in the original byte codes;
- performing a conversion operation selected from the group*:
- converting specific byte codes into equivalent generic byte codes [or vice-versa];
- modifying byte code operands from references using identifying strings to references using unique identifiers; and
- renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and
- relinking jumps for which the destination address is affected by the conversion operation*; and

a processor coupled to the memory, the processor configured to:

- a.) use the interpreter to interpret the applications for execution,
- b.) use the interpreter to create a firewall to isolate the applications from each other, and
- c.) use the communicator to communicate with the terminal.

65. A microcontroller having a set of resource constraints and comprising:

- a memory, and
- an interpreter loaded in memory and operable within the set of resource constraints, the microcontroller having: at least one application loaded in the memory to be interpreted by the interpreter, wherein the at least one application is generated by a programmable environment comprising:
 - a) a compiler for compiling application source programs written in high level language source code form into a compiled form, and
 - b) a converter for post processing the compiled form into a minimized form suitable for interpretation within the set of resource constraints by the interpreter, wherein the converter comprises means for translating from the byte codes in the compiled form to byte codes in a format suitable for interpretation by the interpreter by:
 - [a] using at least one step in a process including the steps: a) *b.1)* recording all jumps and their destinations in the original byte codes;
 - b.2) performing a conversion operation selected from the group*:
 - [a.2] *b.2.1)* converting specific byte codes into equivalent generic byte codes [or vice-versa];
 - [a.3] *b.2.2)* modifying byte code operands from references using identifying strings to references using unique identifiers; and
 - [a.4] *b.2.3.)* renumbering byte codes in [the compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and

4

- b.3) relinking jumps for which *the* destination address is [effectuated] *affected by the* conversion [step a.1, a.2, a.3, or a.4] *operation*.

78. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

- inputting an application program in a first programming language;
- compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;
- converting the first intermediate code into a second intermediate code, wherein the step of converting comprises:
 - [at least one of the steps of: a)] recording all jumps and their destinations in the original byte codes;
 - performing a conversion operation selected from the group*:
 - [b)] converting specific byte codes into equivalent generic byte codes [or vice-versa];
 - [c)] modifying byte code operands from references using identifying strings to references using unique identifiers; and
 - [d)] renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and
- relinking jumps for which *the* destination address is [effectuated] *affected by the* conversion [step a), b), c), or d)] *operation*;
- wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and
- loading the second intermediate code into the memory of the microcontroller.

84. An integrated circuit card for use with a terminal, comprising:

- a communicator configured to communicate with the terminal;
- a memory storing:
 - an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including the steps of:
 - recording all jumps and their destinations in the original byte codes*;
 - modifying byte code operands from references using identifying strings to references using unique identifiers;
 - [recording all jumps and their destinations in the original byte codes;]
 - converting specific byte codes into equivalent generic byte codes [or vice-versa]; [and]
 - renumbering byte codes in [a compiled format] *the compiled form* to equivalent byte codes in [a format suitable for interpretation] *an instruction set supported by an interpreter on the integrated circuit card*; and
 - adjusting jump destinations that are affected by at least one of the steps of modifying byte code*

US 6,308,317 C1

5

operands, converting specific byte codes into equivalent generic byte codes, or renumbering byte codes; and

an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

85. A method for use with an integrated circuit card and a terminal, comprising:

storing an interpreter operable to interpret programs derived from programs written in a high level programming language and an application derived from a program written in a high level programming language format in a memory of the integrated circuit card wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including:

recording all jumps and their destinations in the original byte codes;

modifying byte code operands from references using identifying strings to references using unique identifiers;

[recording all jumps and their destinations in the original byte codes;]

converting specific byte codes into equivalent generic byte codes [or vice-versa]; [and]

renumbering byte codes in [a compiled format] the compiled form to equivalent byte codes in [a format suitable for interpretation] an instruction set supported by an interpreter on the integrated circuit card; and

adjusting jump destinations that are affected by at least one of the steps of modifying byte code operands, converting specific byte codes into equivalent generic byte codes, or renumbering byte codes; and

using a processor of the integrated circuit card to use the interpreter to interpret the application for execution; and

using a communicator of the card when communicating between the processor and the terminal.

86. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

applications, each application derived from applications having a high level programming language format, and

an interpreter operable to interpret applications derived from applications having a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including the steps of:

recording all jumps and their destinations in the original byte codes;

modifying byte code operands from references using identifying strings to references using unique identifiers;

6

[recording all jumps and their destinations in the original byte codes;]

converting specific byte codes into equivalent generic byte codes [or vice-versa]; [and]

renumbering byte codes in [a compiled format] the compiled form to equivalent byte codes in [a format suitable for interpretation] an instruction set supported by an interpreter on the integrated circuit card; and

adjusting jump destinations that are affected by at least one of the steps of modifying byte code operands, converting specific byte codes into equivalent generic byte codes or vice versa, and renumbering byte codes; and

a processor coupled to the memory, the processor configured to:

a.) use the interpreter to interpret the applications for execution,

b.) use the interpreter to create a firewall to isolate the applications from each other, and

c.) use the communicator to communicate with the terminal.

87. A microcontroller comprising:

a memory storing:

a derivative application derived from an application having a class file format wherein the application is derived from an application having a class format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, the converting step including:

recording all jumps and their destinations in the original byte codes;

converting specific byte codes into equivalent generic byte codes [or vice-versa]; [and]

renumbering byte codes in [a compiled format] the compiled form to equivalent byte codes in [a format suitable for interpretation.] an instruction set supported by an interpreter on the integrated circuit card; and

adjusting jump destinations that are affected by at least one of the steps of converting specific byte codes into equivalent generic byte codes and renumbering byte codes; and

an interpreter configured to interpret applications derived from applications having a class file format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the derivative application for execution.

88. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

inputting an application program in a first programming language;

compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code, wherein the step of converting comprises:

recording all jumps and their destinations in the original byte codes;

modifying byte code operands from references using identifying strings to references using unique identifiers; and

US 6,308,317 C1

7

renumbering byte codes in the compiled form to equivalent byte codes in an instruction set supported by an interpreter on the integrated circuit; and

relinking jumps for which the destination address is affected by the conversion operation; wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and

loading the second intermediate code into the memory of the microcontroller.

89. The method of programming a microcontroller of claim 88 wherein the step of converting further comprises: associating an identifying string for objects, classes, fields, or methods; and mapping such strings to unique identifiers.

90. The method of claim 89 wherein the step of mapping comprises the step of mapping strings to integers.

91. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

inputting an application program in a first programming language;

compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code, wherein the step of converting comprises:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation comprising: modifying specific byte codes into equivalent generic byte codes; and

relinking jumps for which the destination address is affected by the conversion operation; wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and

loading the second intermediate code into the memory of the microcontroller.

92. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

inputting an application program in a first programming language;

compiling an application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code, wherein the step of converting comprises:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation comprising: renumbering byte codes in the compiled form to equivalent byte codes in an instruction set supported by an interpreter on the integrated circuit card; and

8

relinking jumps for which the destination address is affected by the conversion operation; wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and

loading the second intermediate code into the memory of the microcontroller.

93. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step comprising:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation including modifying byte code operands from references using identifying strings to references using unique identifiers; and

relinking jumps for which the destination address is affected by the conversion operation; and

an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

94. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step comprising:

recording all jumps and their destinations in the original byte codes;

performing a conversion operation including: converting specific byte codes into equivalent generic byte codes; and

renumbering byte codes in the compiled form to equivalent byte codes in an instruction set supported by an interpreter on the integrated circuit card; and

relinking jumps for which the destination address is affected by the conversion operation; and

an interpreter operable to interpret such an application derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.



US007117485B2

(12) **United States Patent**
Wilkinson et al.

(10) **Patent No.:** **US 7,117,485 B2**
(45) **Date of Patent:** **Oct. 3, 2006**

(54) **USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER**

(75) Inventors: **Timothy J. Wilkinson**, London (GB);
Scott B. Guthery, Belmont, MA (US);
Ksheerabdh Krishna, Cedar Park, TX (US);
Michael A. Montgomery, Cedar Park, TX (US)

5,663,553 A *	9/1997	Aucsmith	235/492
5,679,945 A *	10/1997	Renner et al.	235/492
5,748,964 A *	5/1998	Gosling	717/126
5,915,226 A *	6/1999	Martineau	455/558
5,923,884 A *	7/1999	Peyret et al.	717/167
6,223,984 B1 *	5/2001	Renner et al.	235/380
6,308,317 B1 *	10/2001	Wilkinson et al.	717/139

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Axalto SA**, Montrouge (FR)

FR	2 667 171	9/1990
JP	61-204741 A	9/1986

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 643 days.

OTHER PUBLICATIONS

(21) Appl. No.: **10/037,390**

Rodley, J., Writing Java Applets, Apr. 15, 1996, Corolis Group, p. 3-19.*
Fryer, Microsoft Computer Dictionary, 1997, Microsoft Press, 3rd Ed., p. 498.*

(22) Filed: **Oct. 23, 2001**

* cited by examiner

(65) **Prior Publication Data**

US 2003/0023954 A1 Jan. 30, 2003

Primary Examiner—John Chavis
(74) Attorney, Agent, or Firm—Pehr Jansson

(51) **Int. Cl.**
G06F 9/45 (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.** **717/139**
(58) **Field of Classification Search** **717/139,**
717/118; 235/492, 441

An integrated circuit card is used with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,500,517 A * 3/1996 Cagliostro 235/486

44 Claims, 23 Drawing Sheets

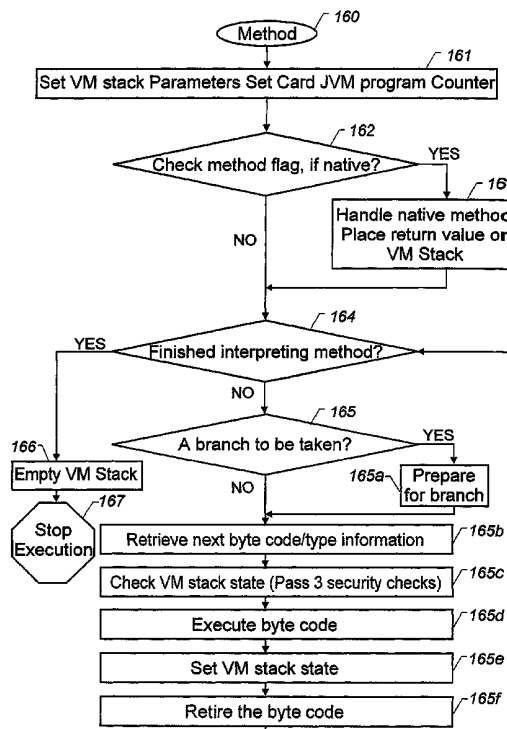

U.S. Patent

Oct. 3, 2006

Sheet 1 of 23

US 7,117,485 B2

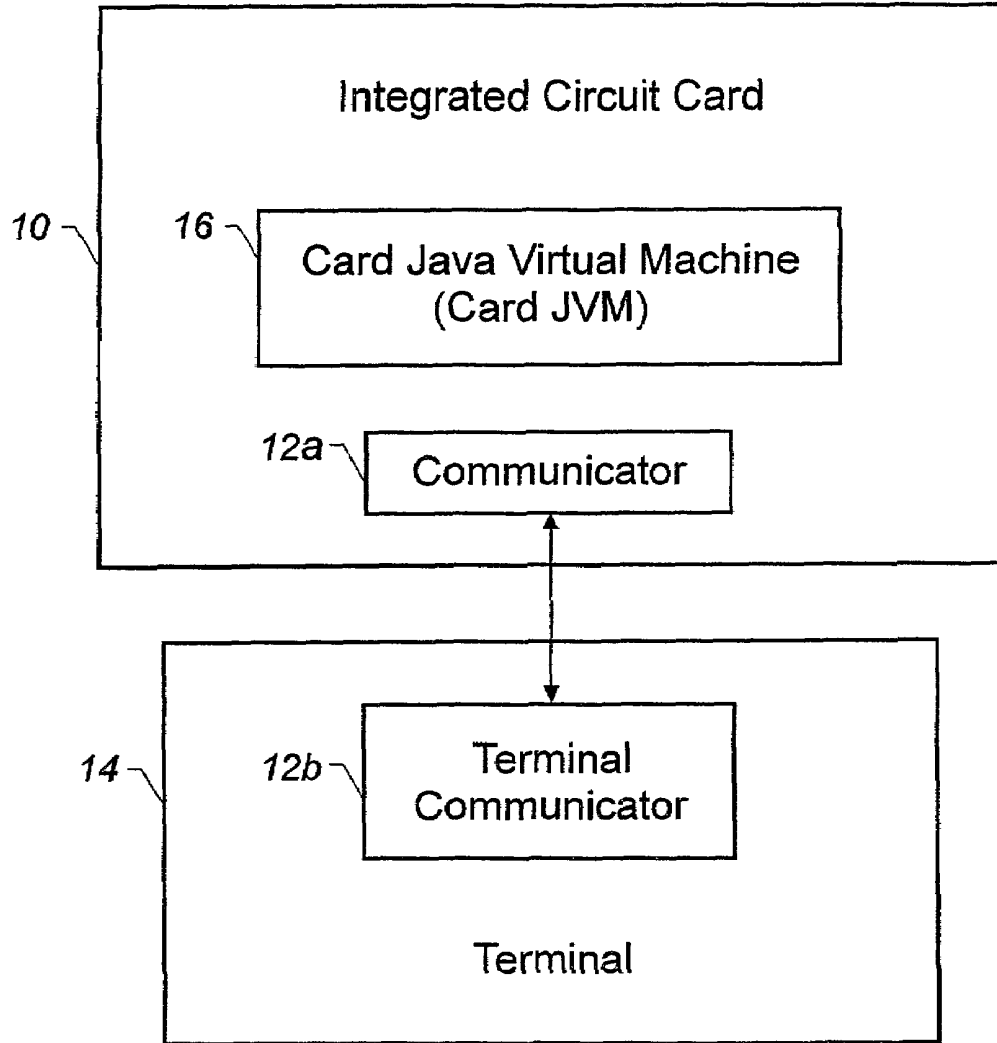


FIGURE 1

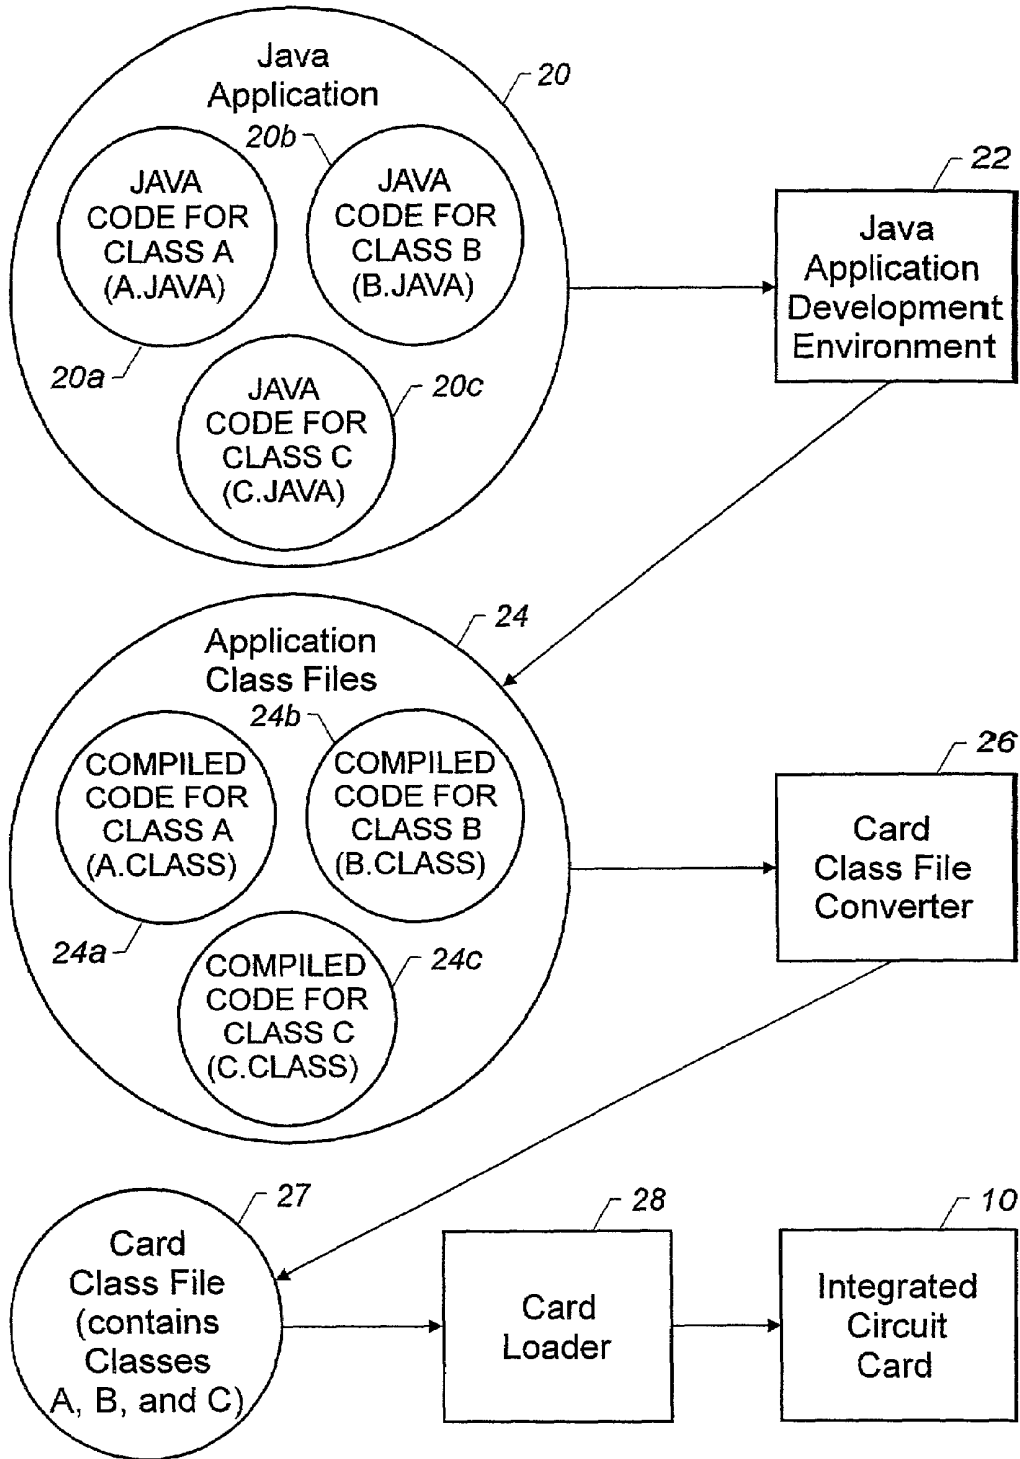


FIGURE 2

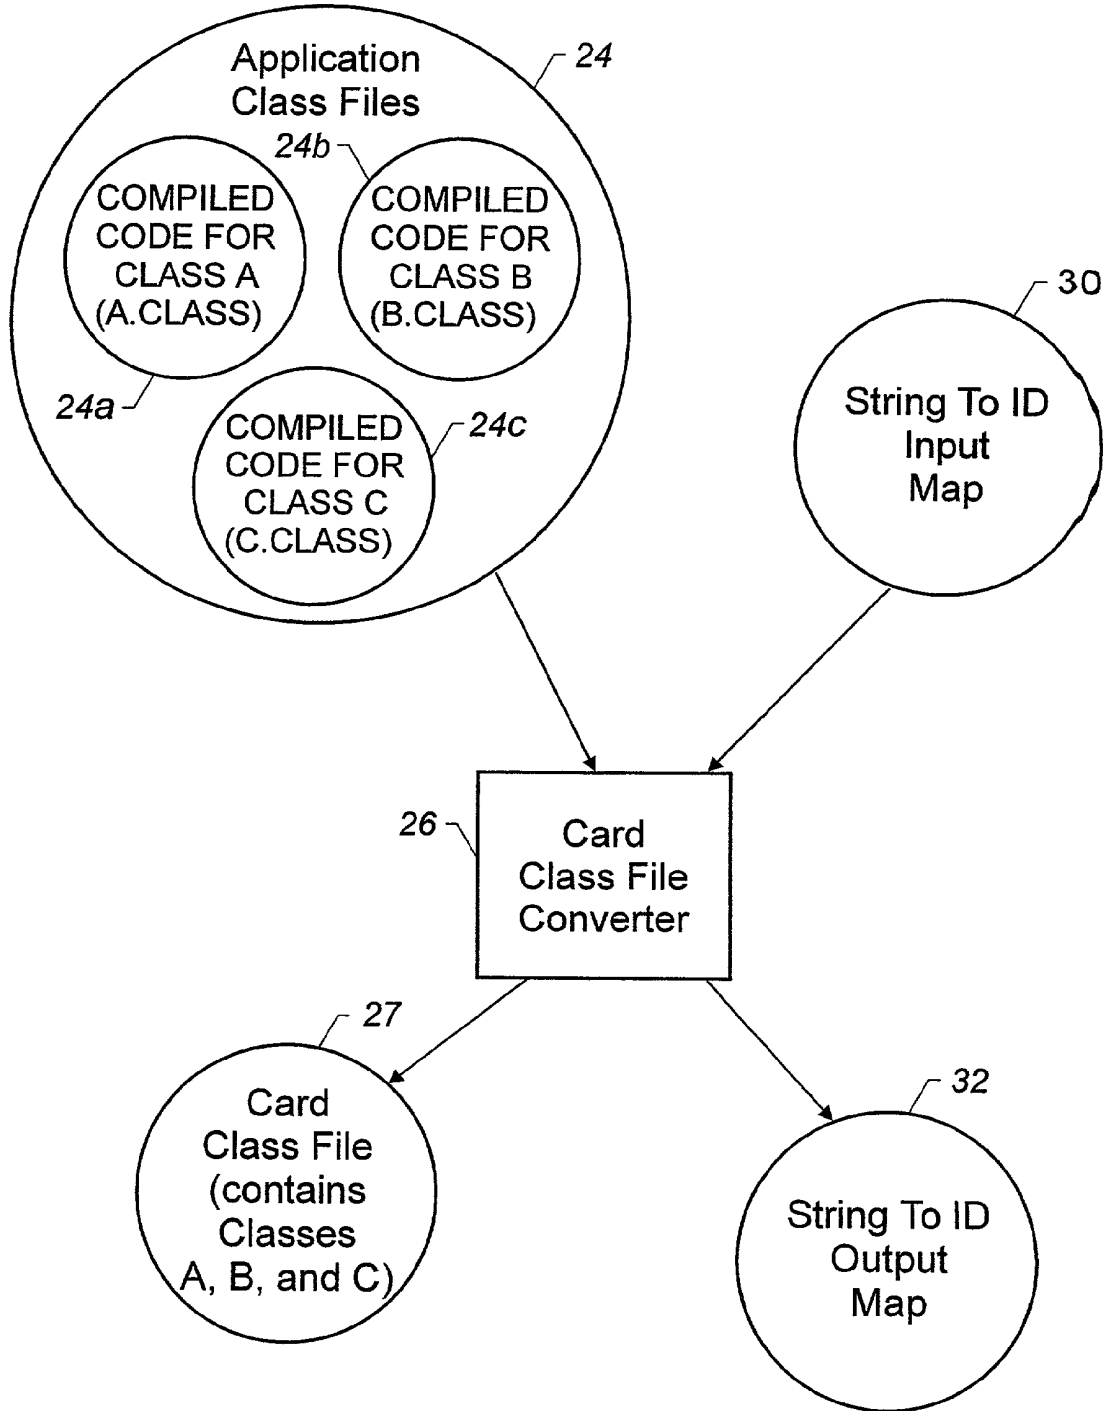


FIGURE 3

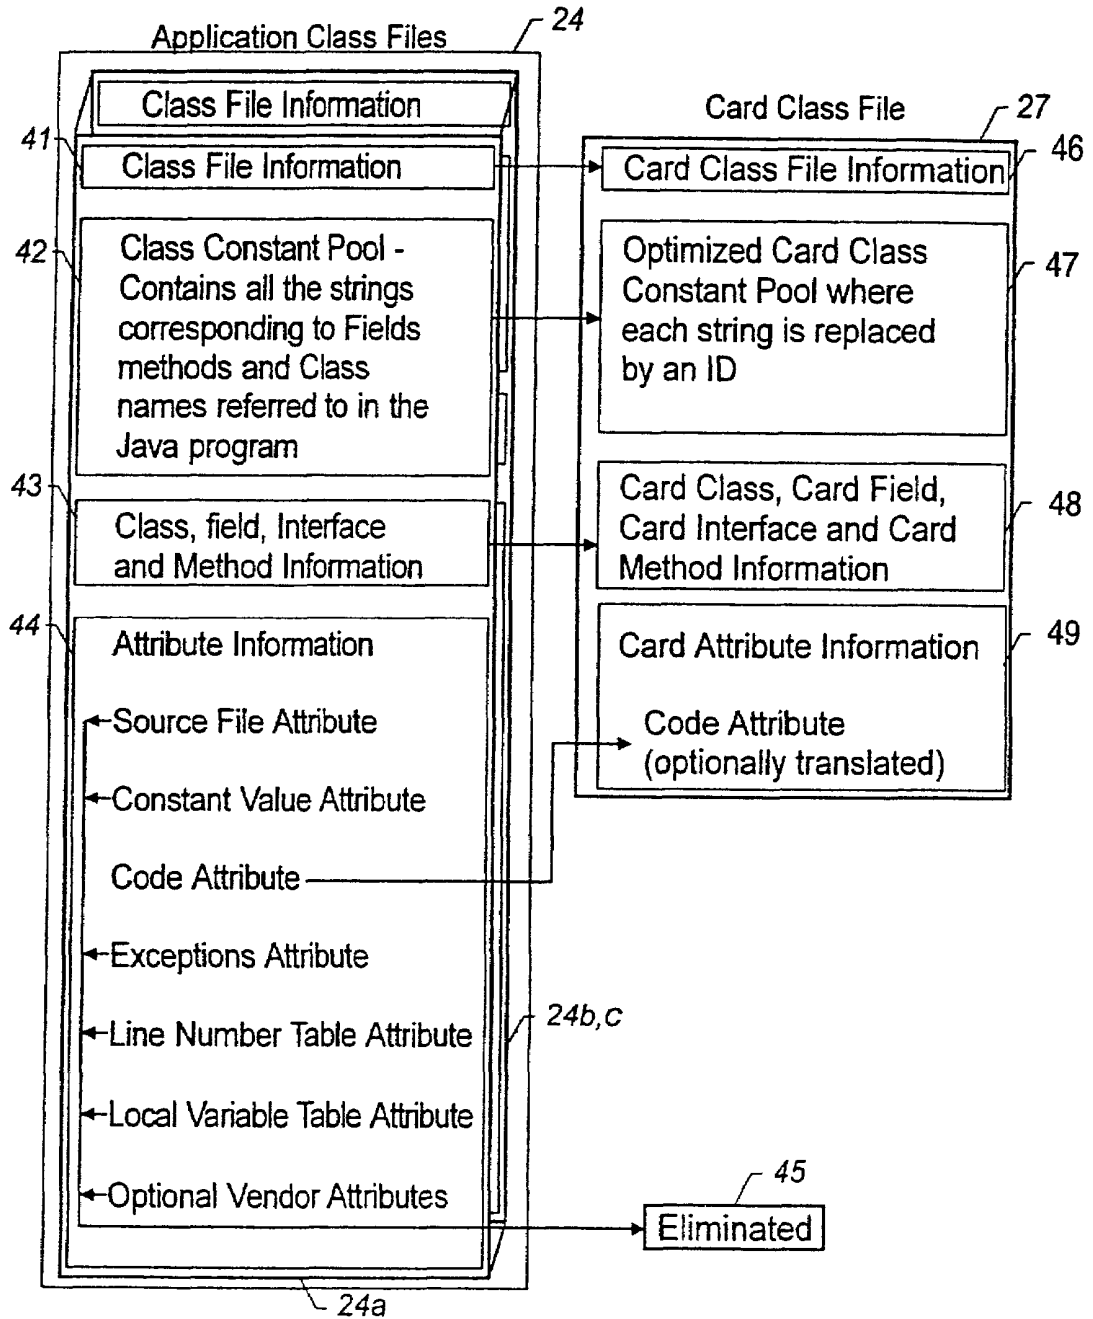


FIGURE 4

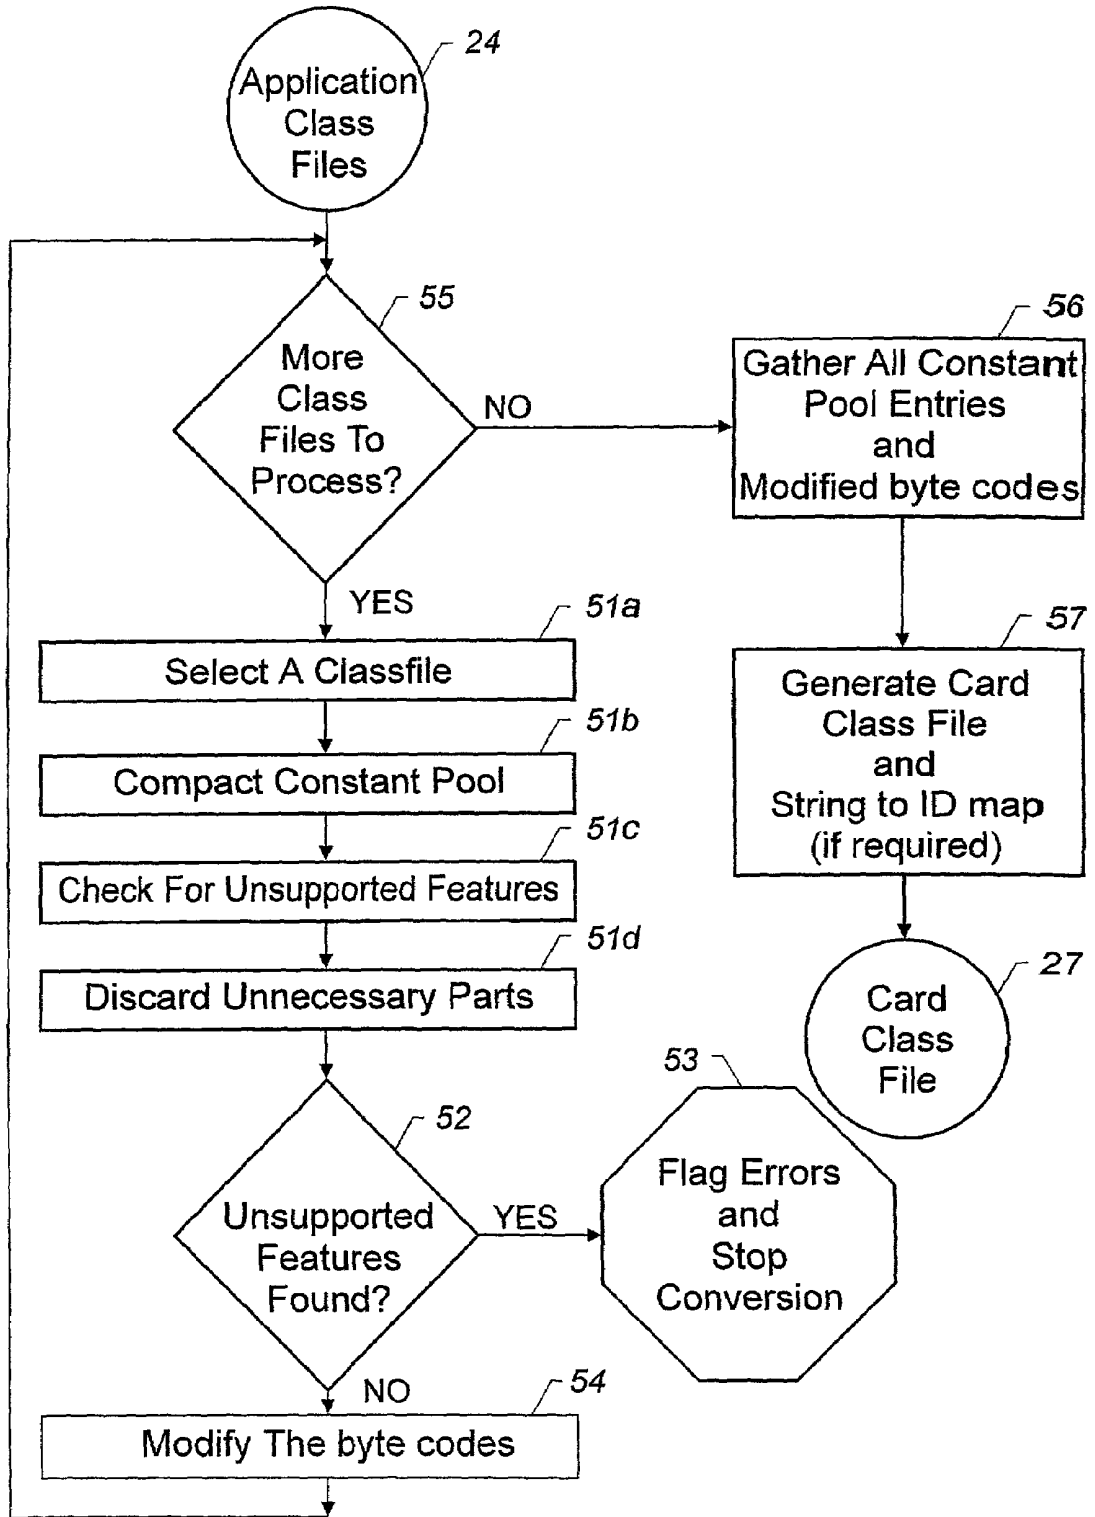


FIGURE 5

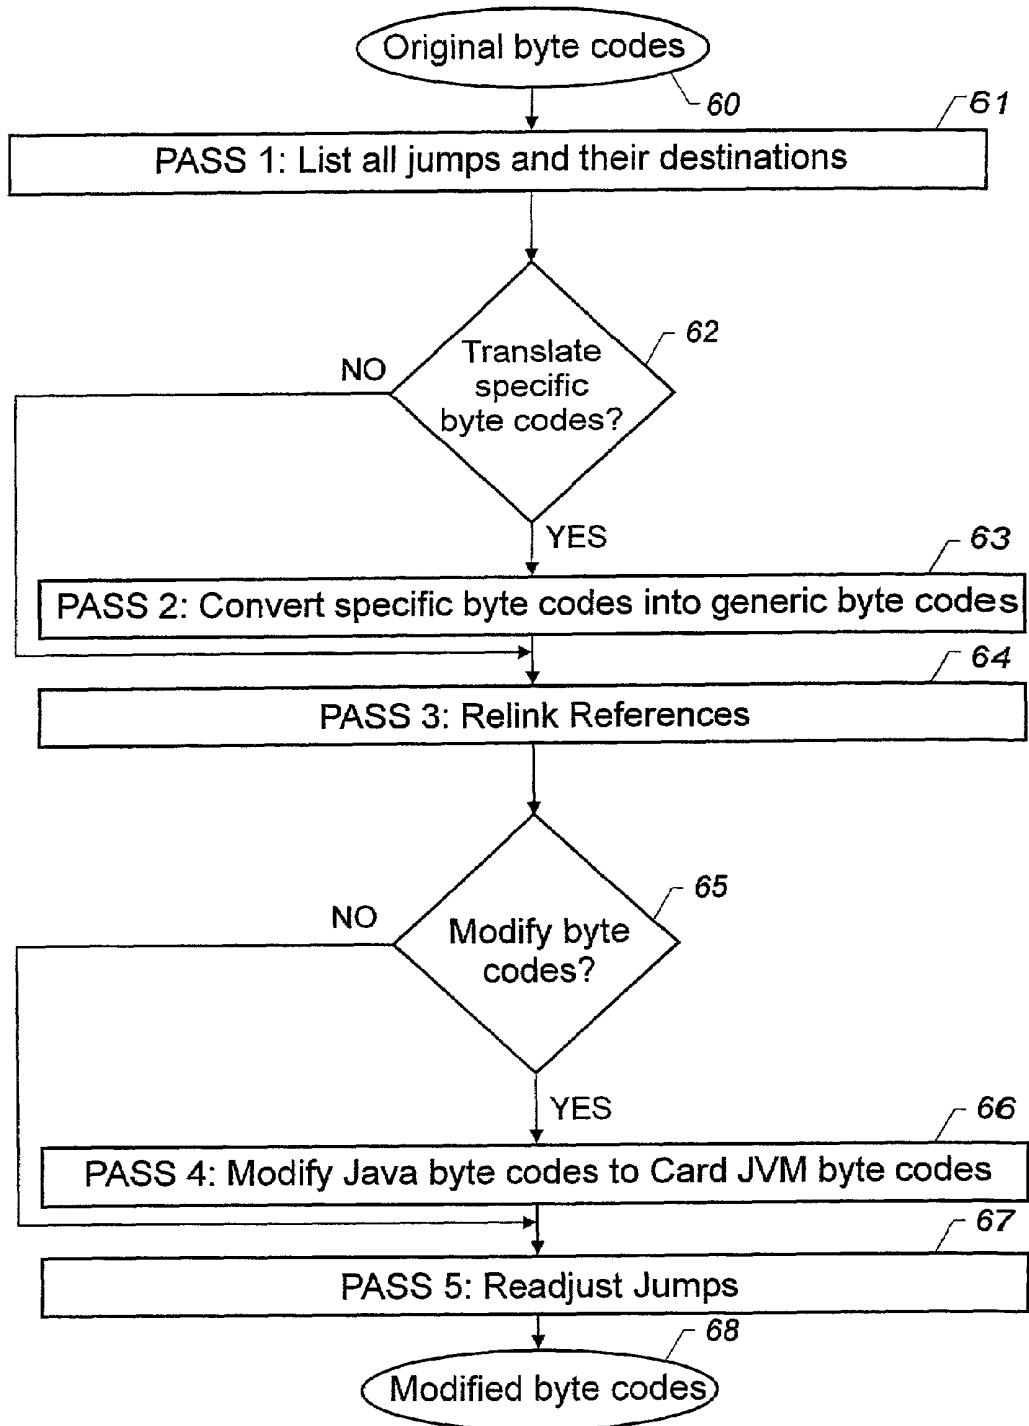


FIGURE 6

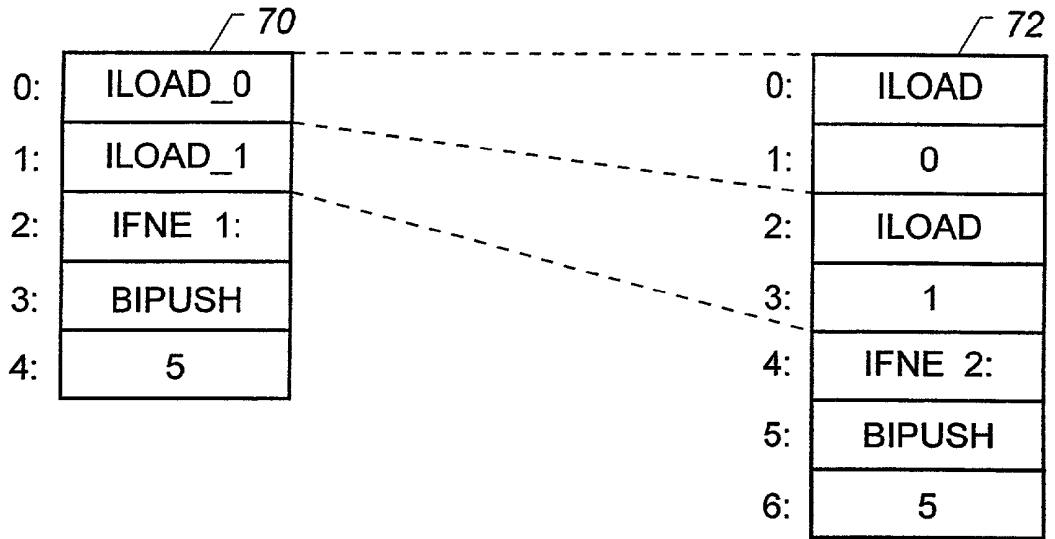




FIGURE 7

U.S. Patent

Oct. 3, 2006

Sheet 8 of 23

US 7,117,485 B2

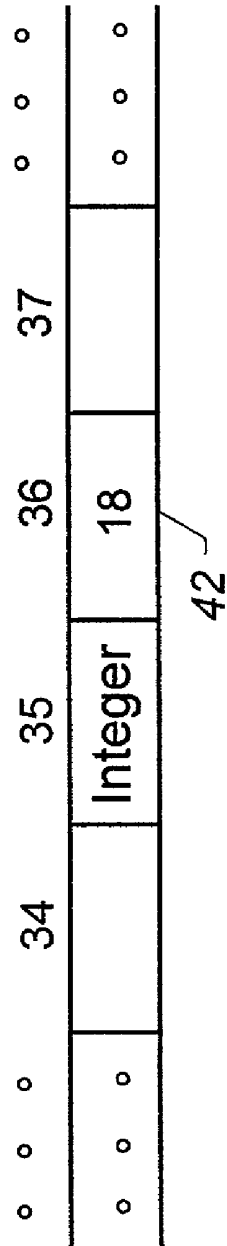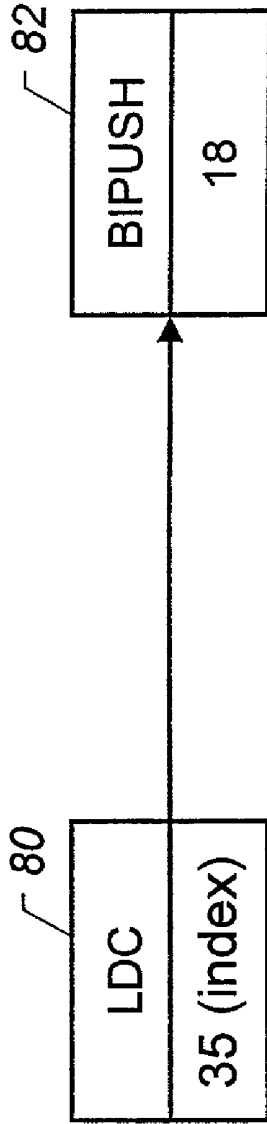

Class file Constant Pool

FIGURE 8

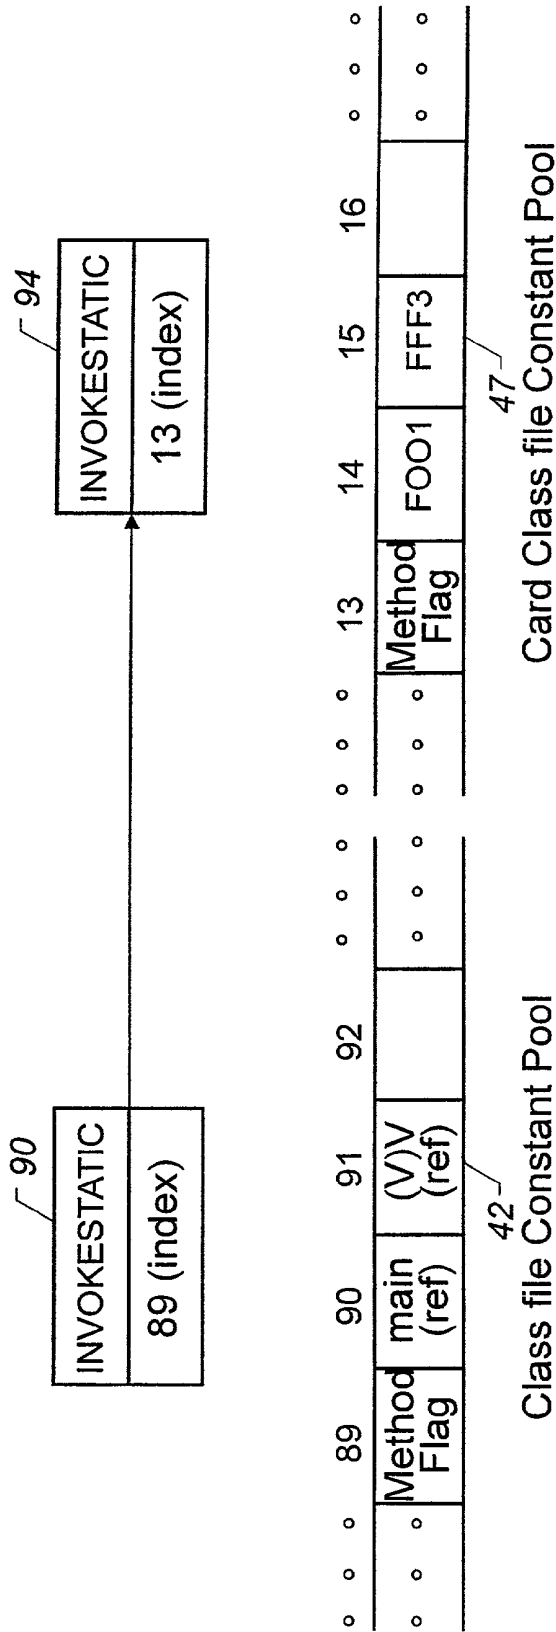


FIGURE 9

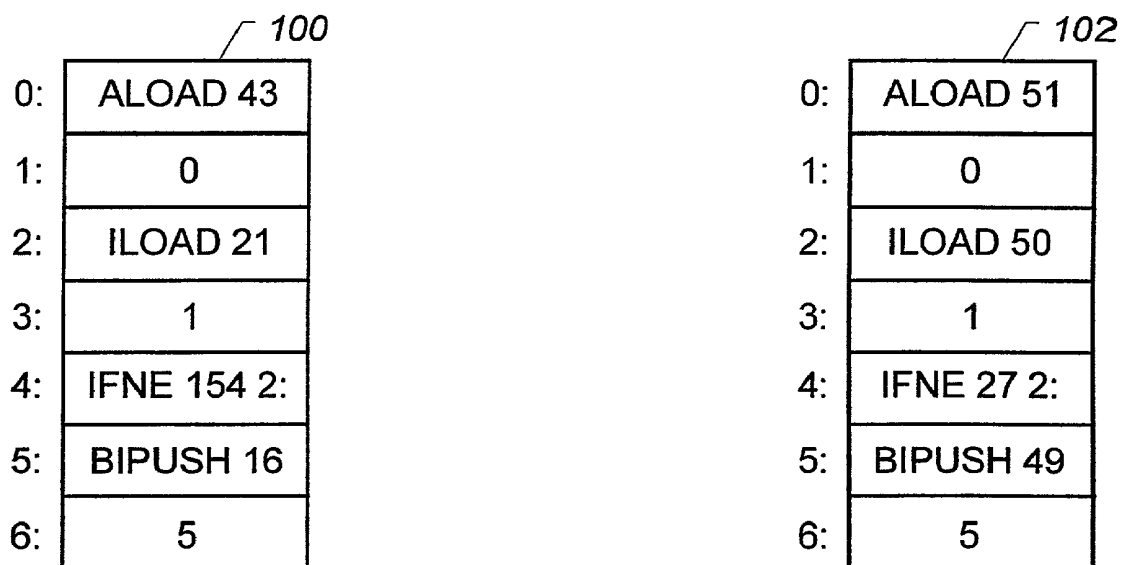


FIGURE 10

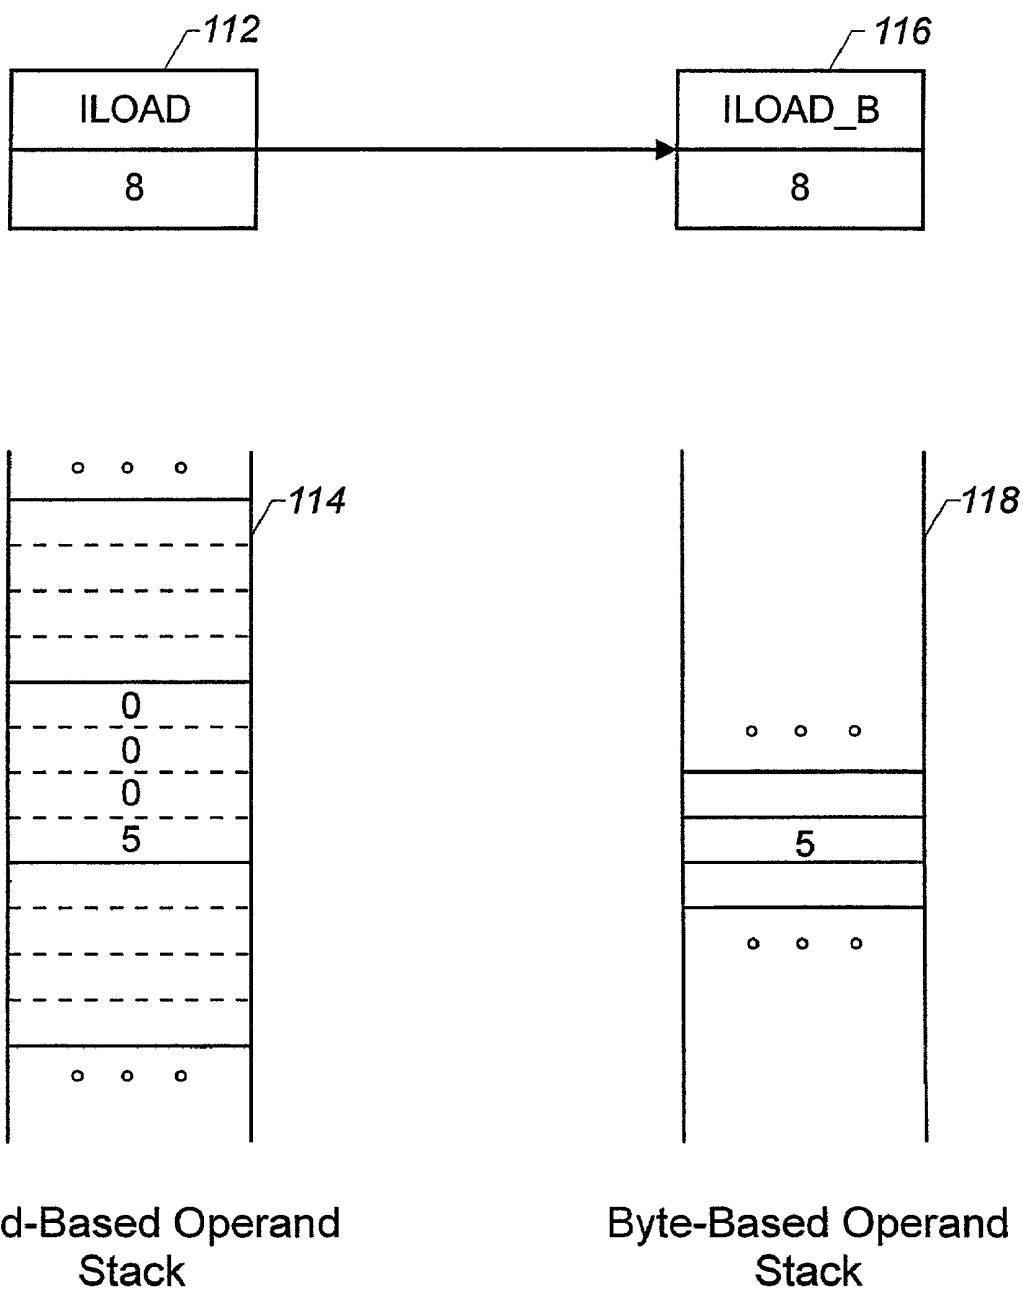


FIGURE 11

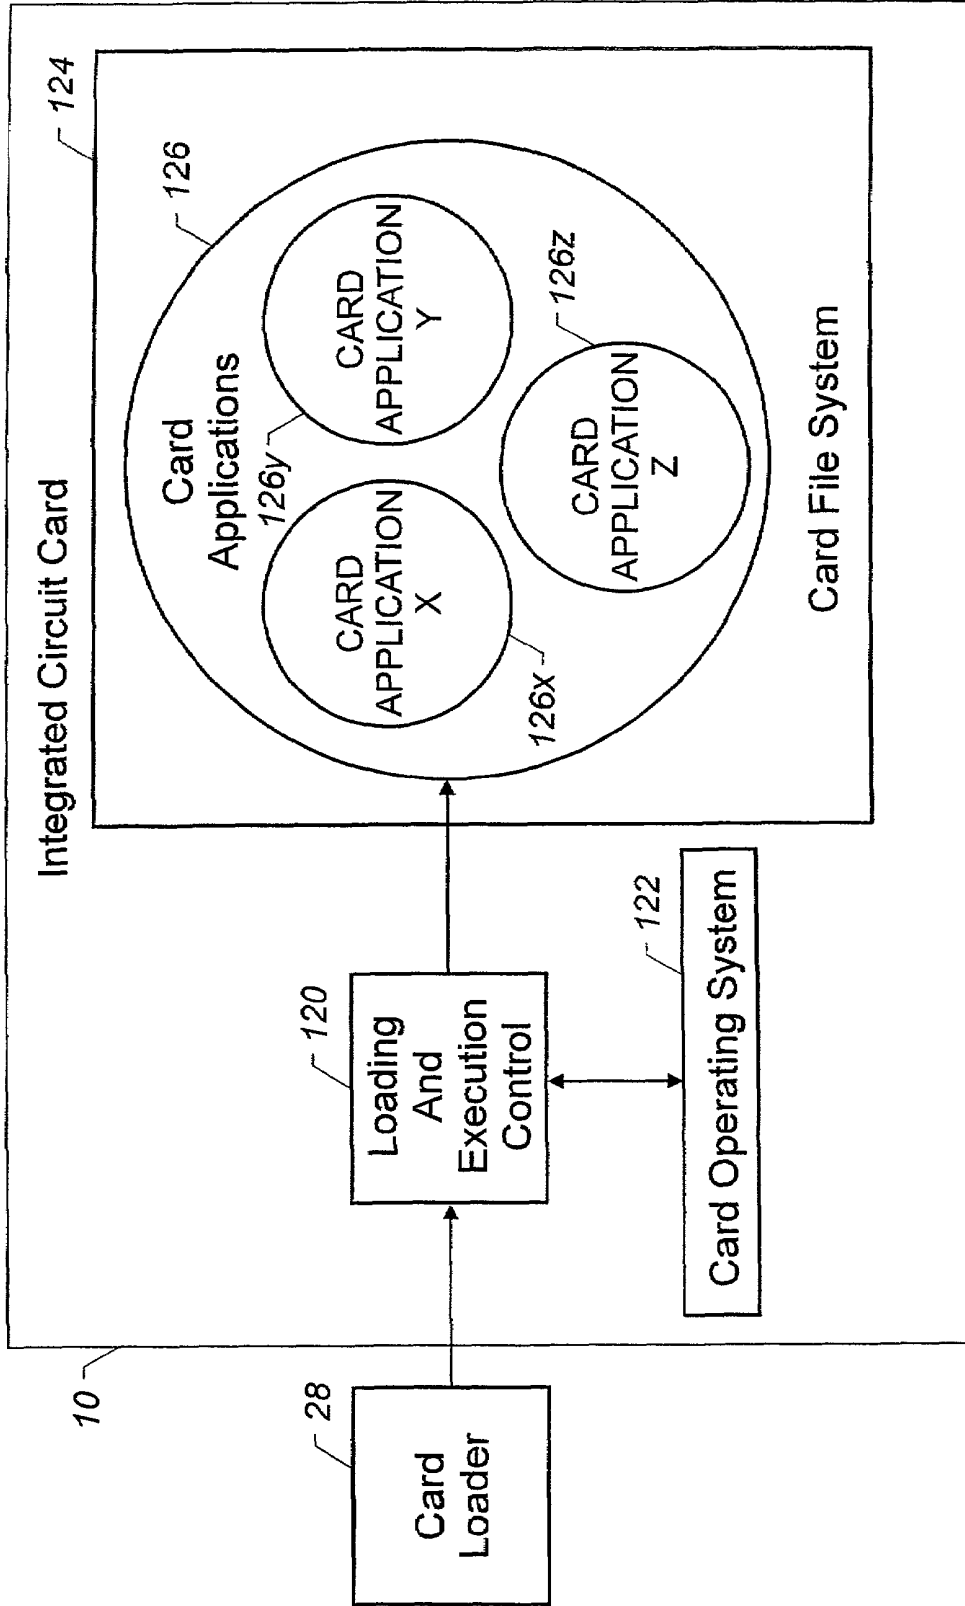


FIGURE 12

U.S. Patent

Oct. 3, 2006

Sheet 13 of 23

US 7,117,485 B2

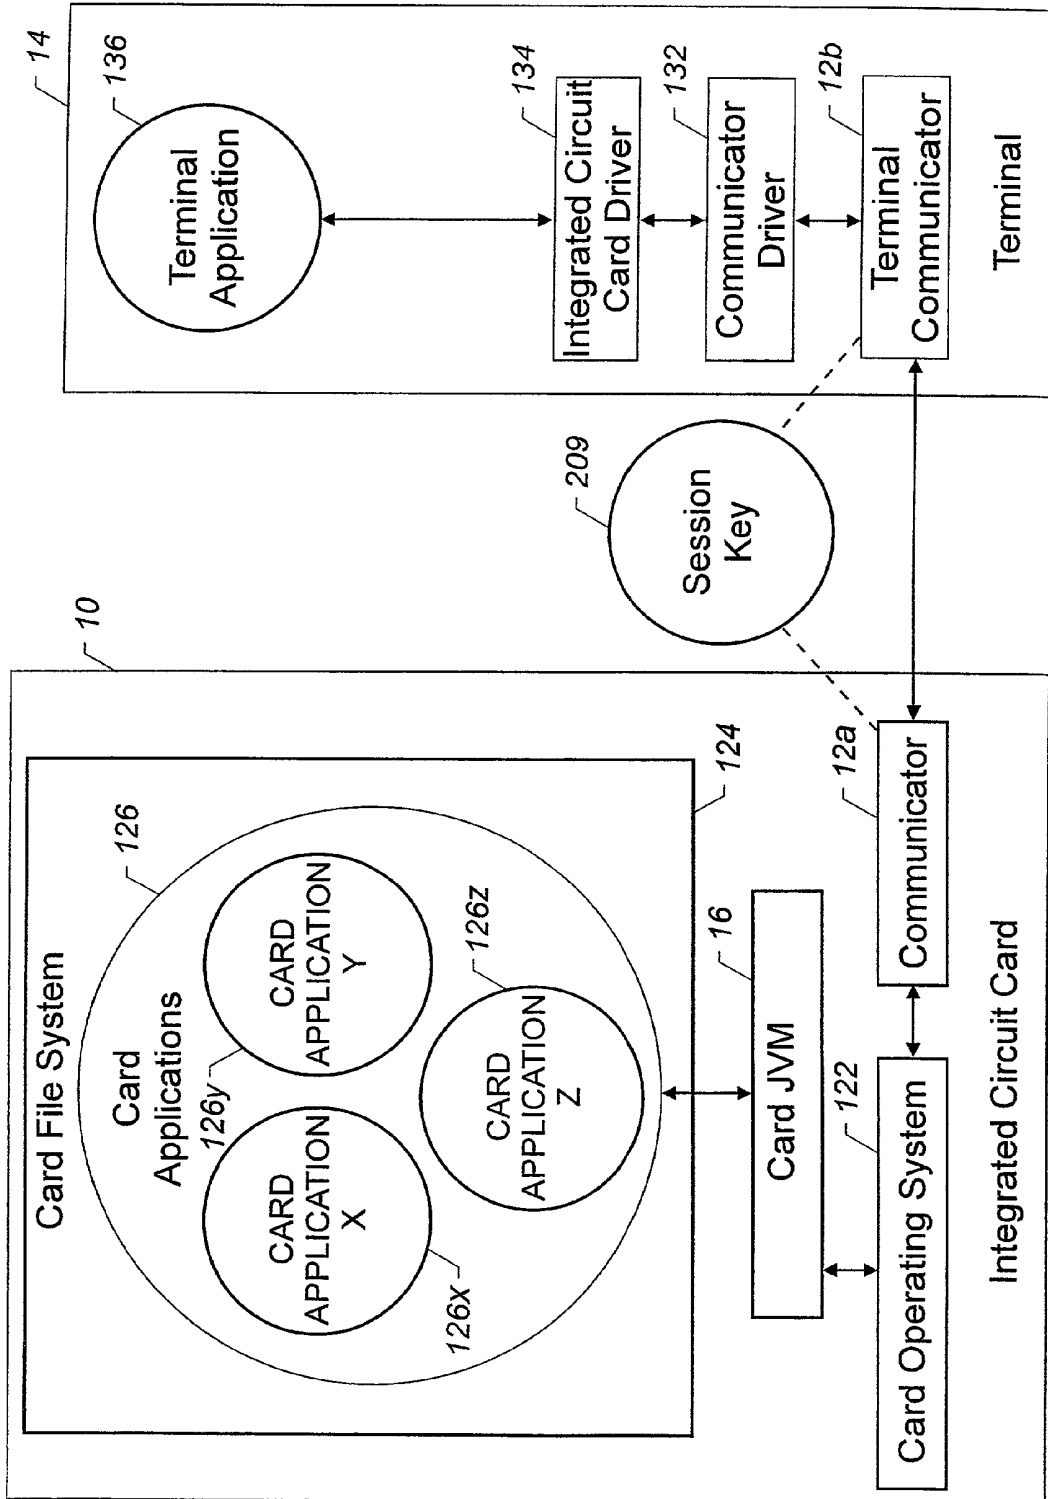


FIGURE 13

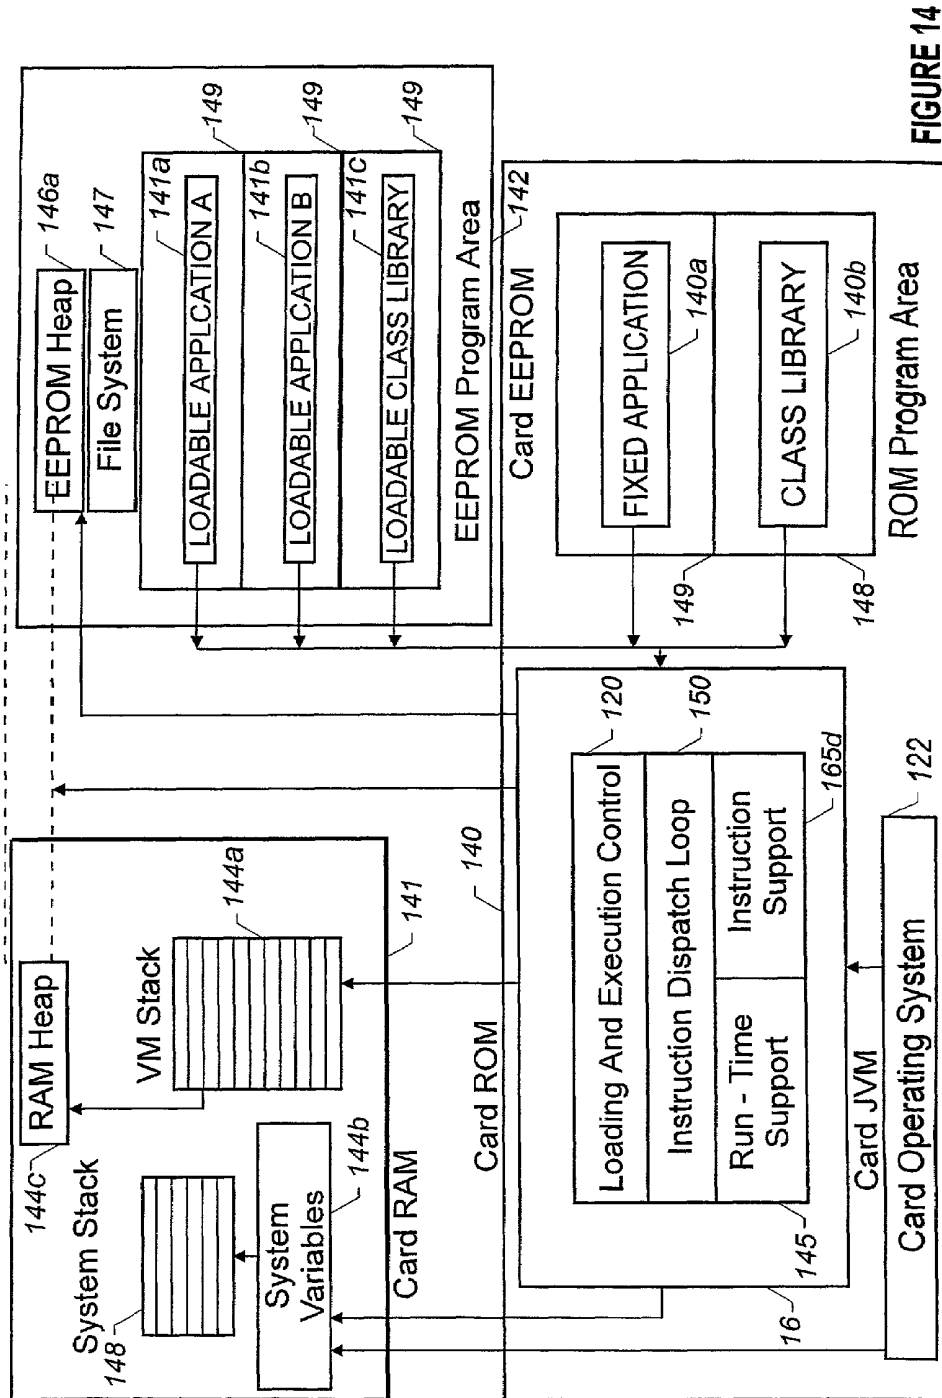


FIGURE 14

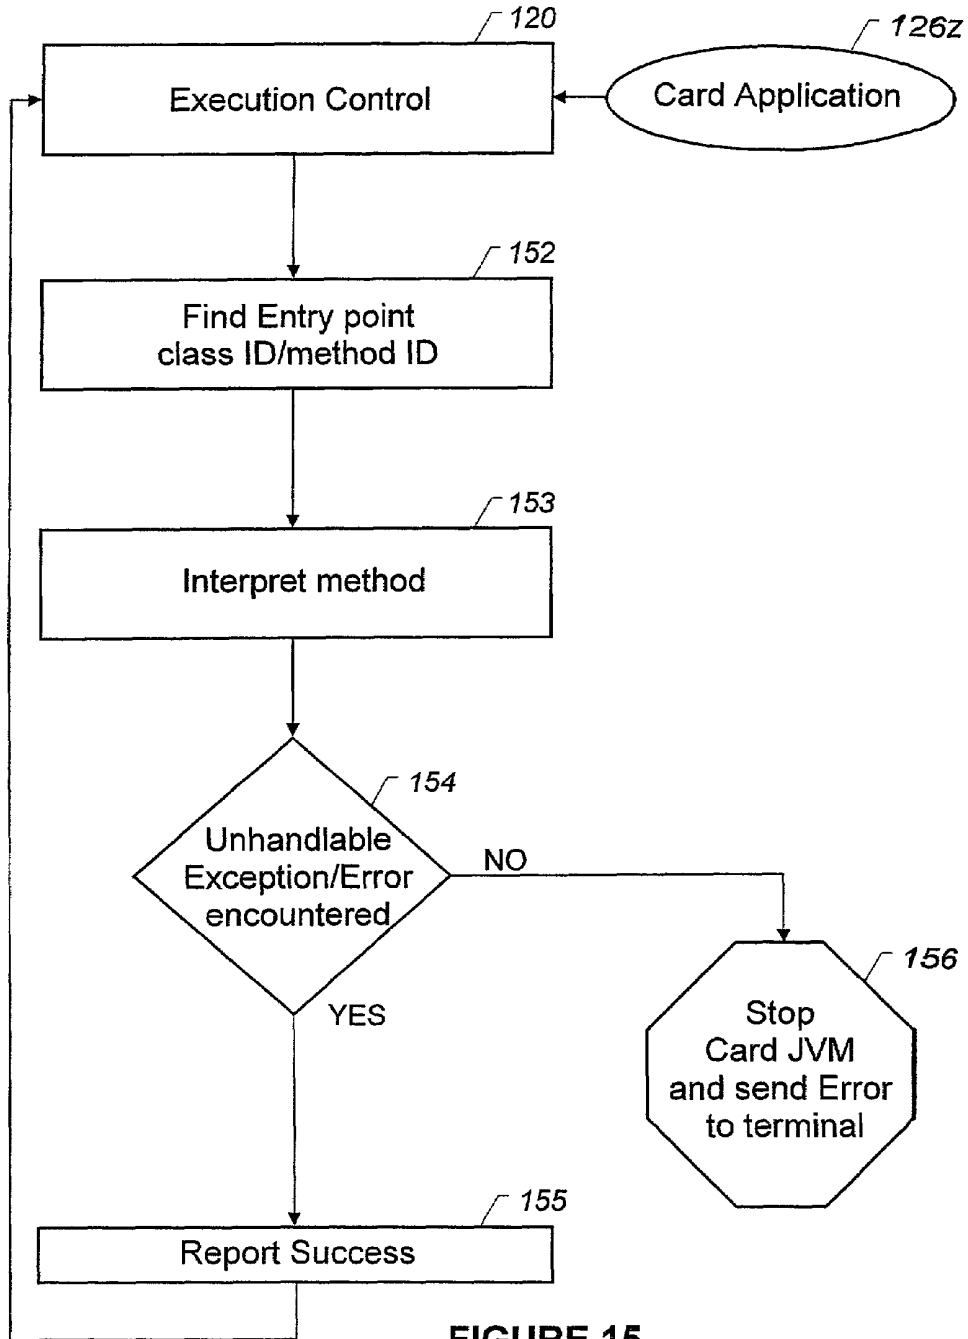


FIGURE 15

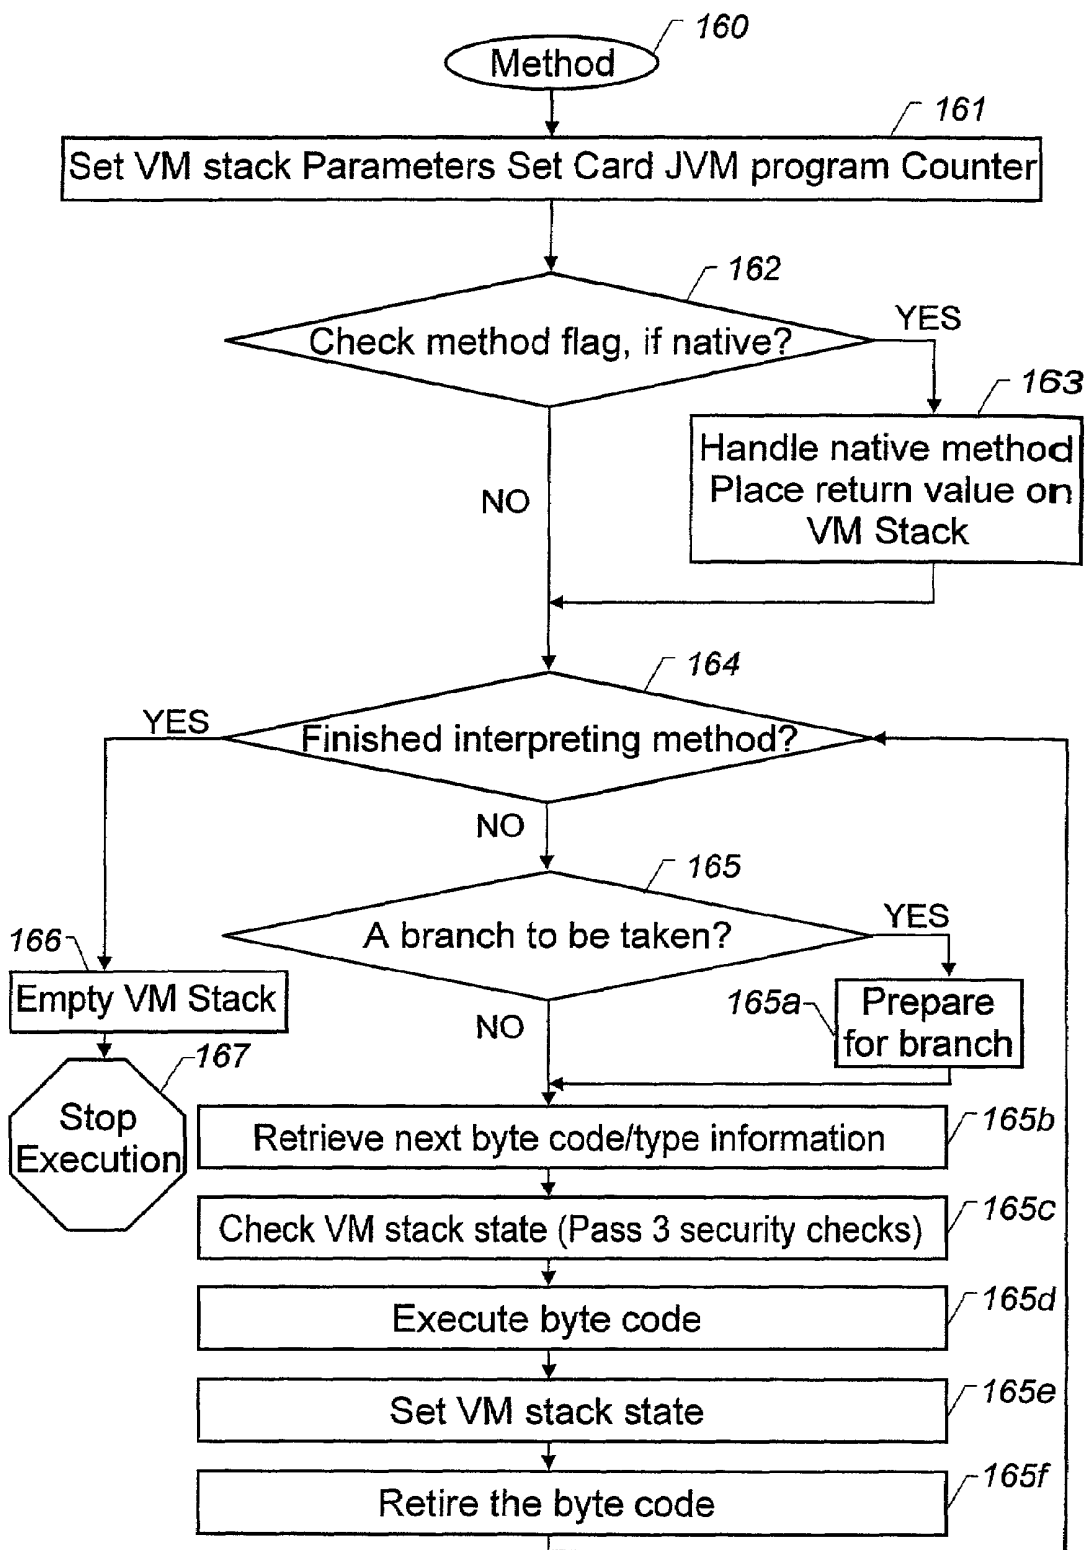


FIGURE 16

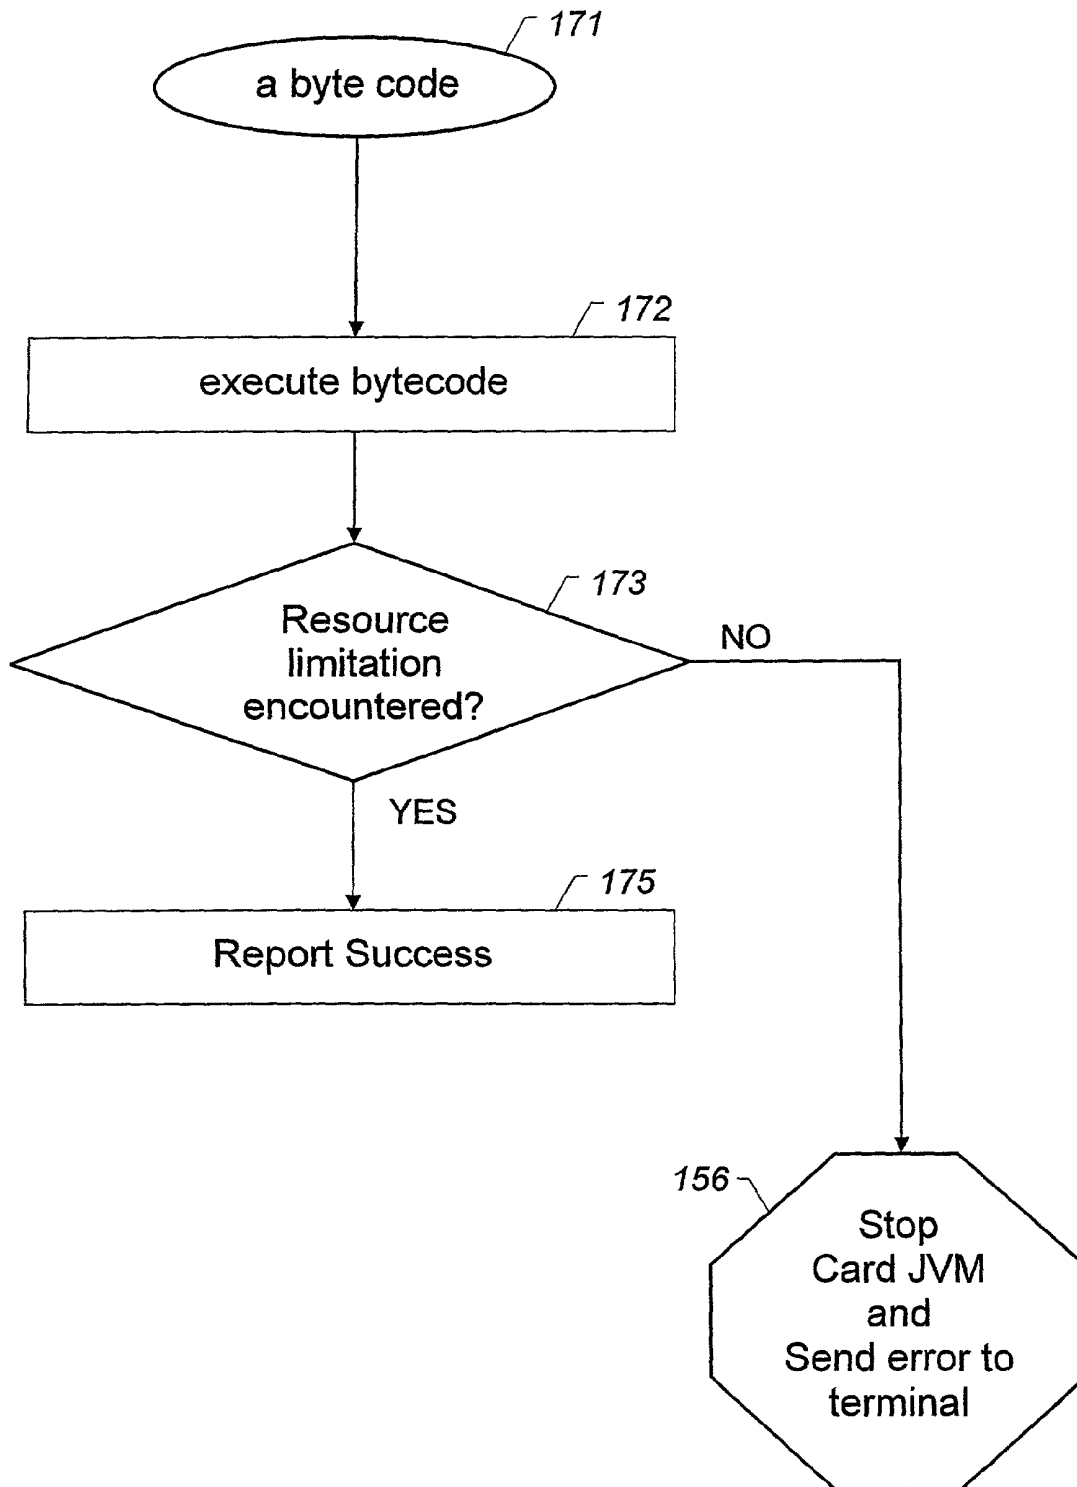


FIGURE 17

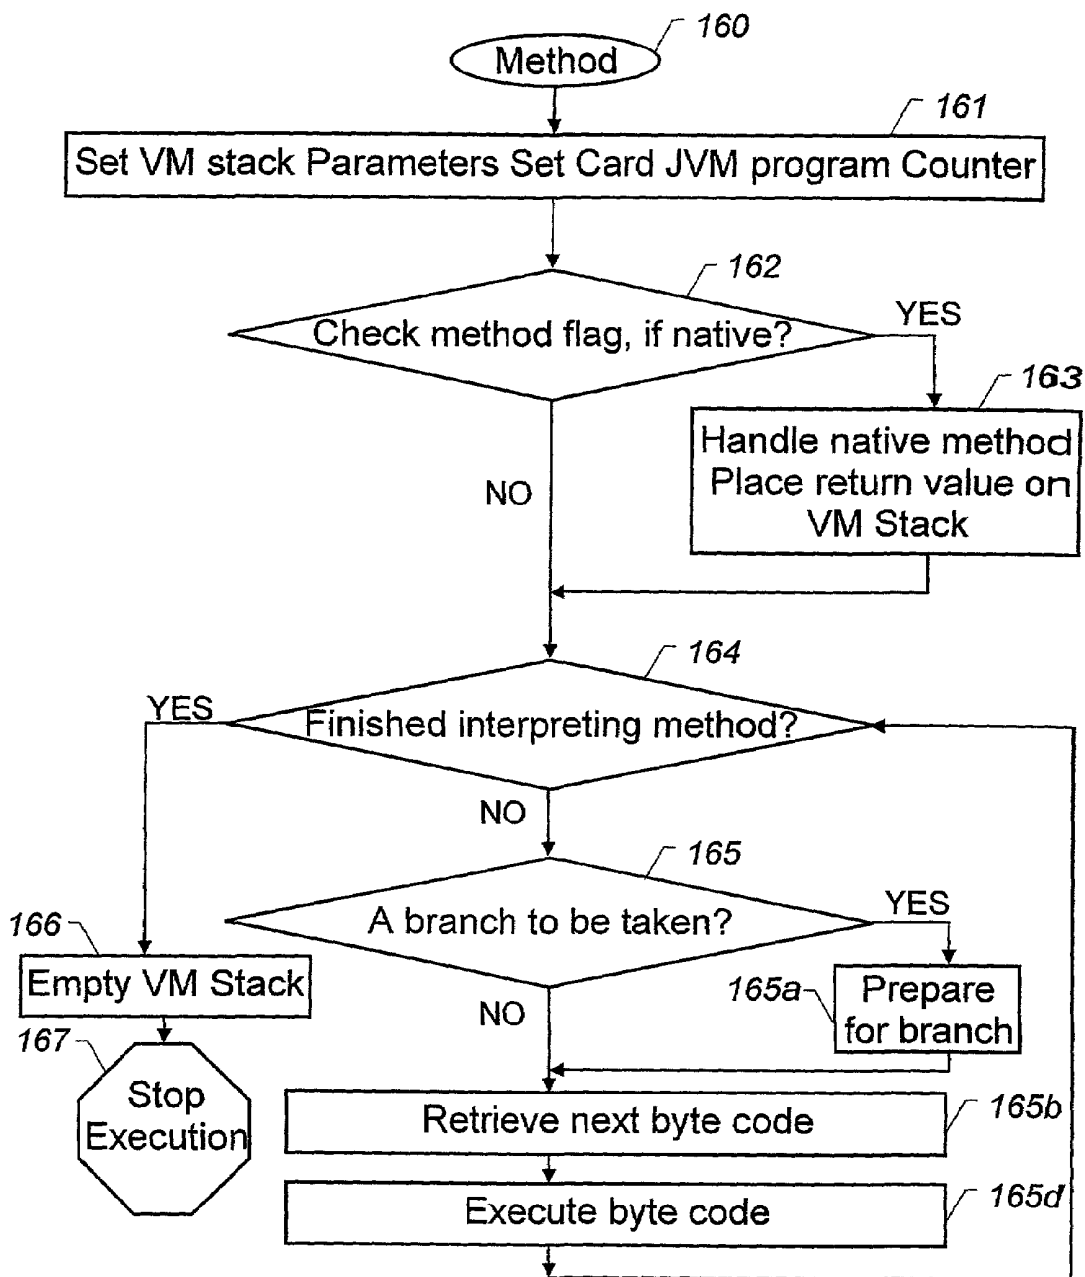


FIGURE 18

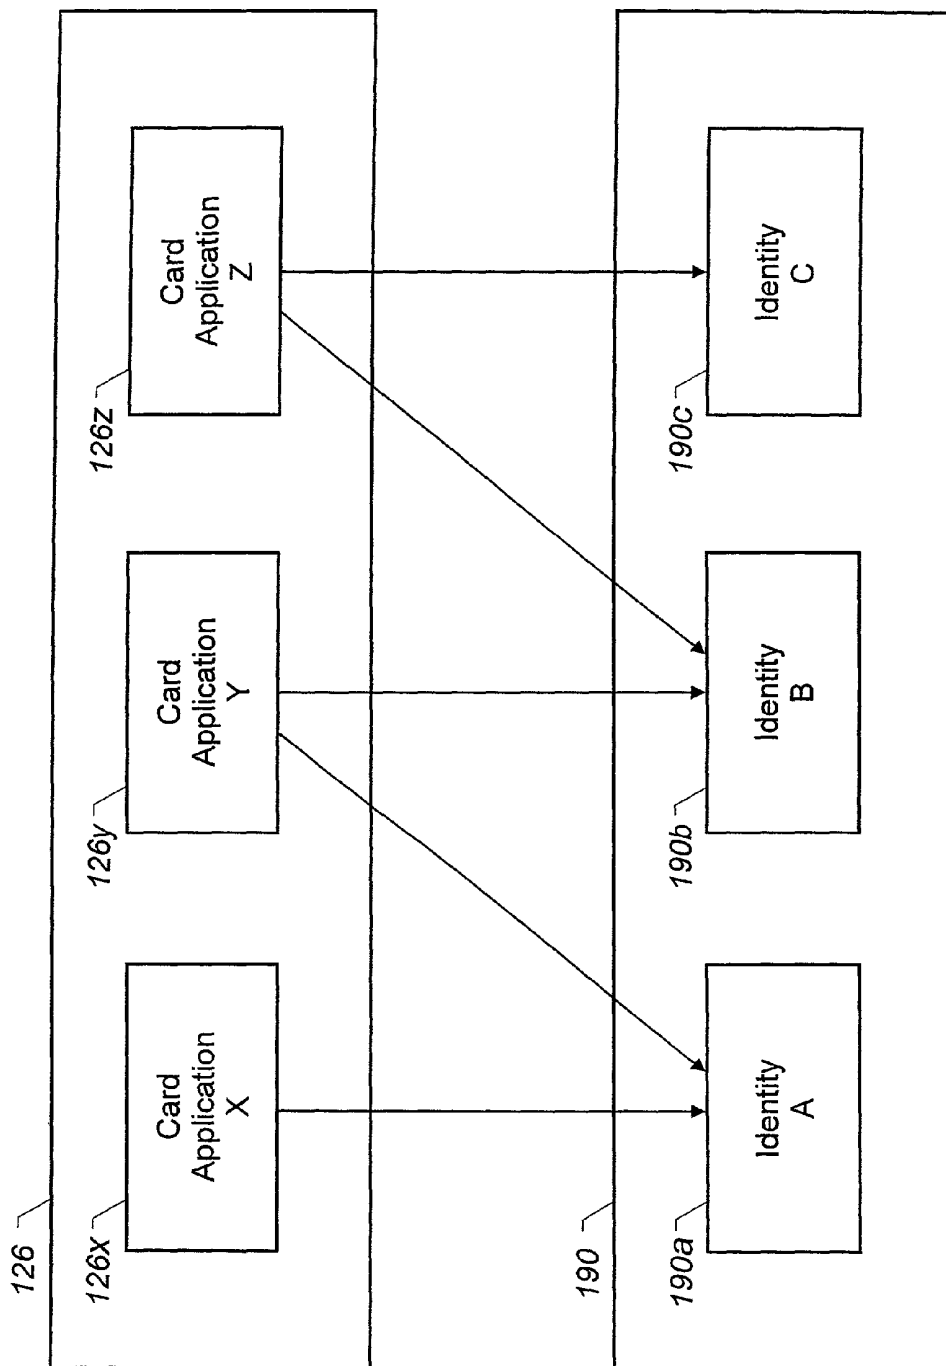


FIGURE 19

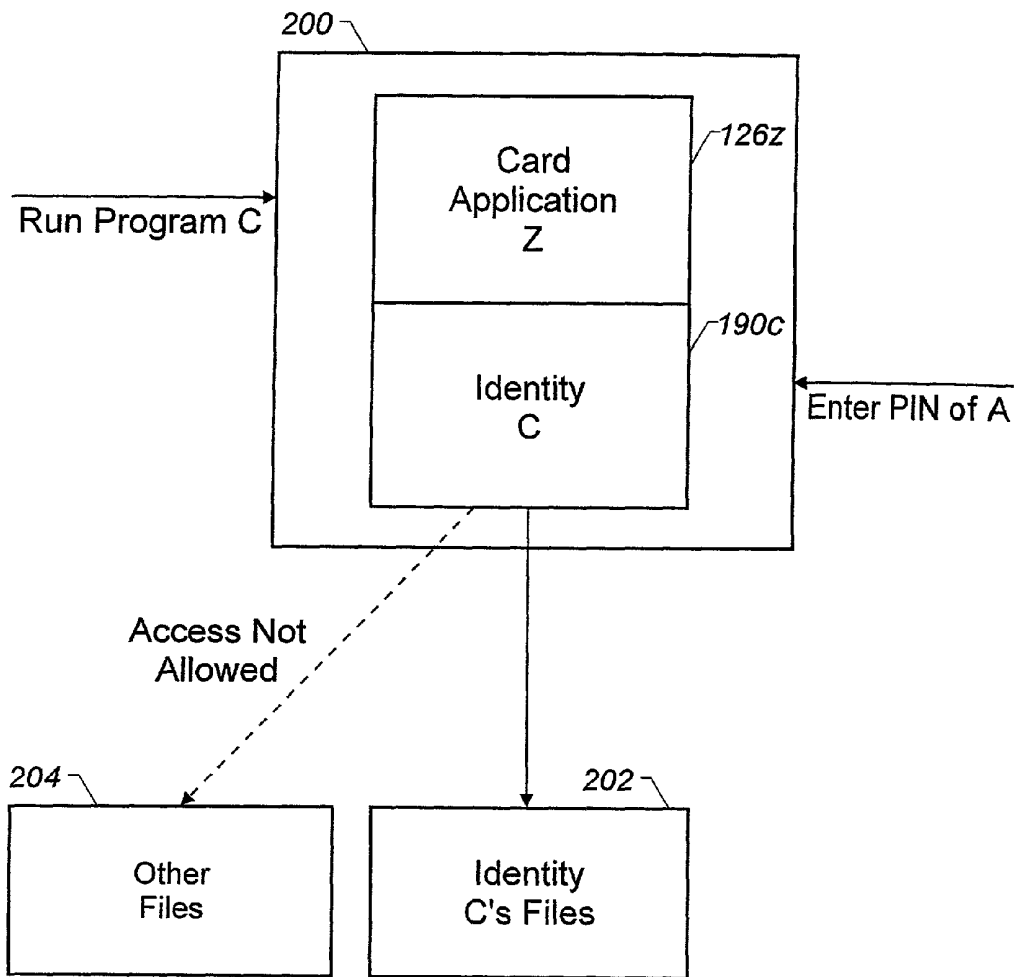


FIGURE 20

U.S. Patent

Oct. 3, 2006

Sheet 21 of 23

US 7,117,485 B2

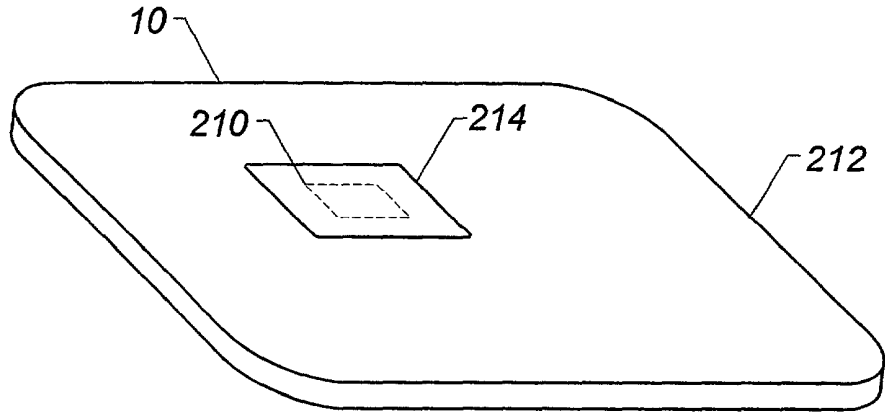


FIGURE 21

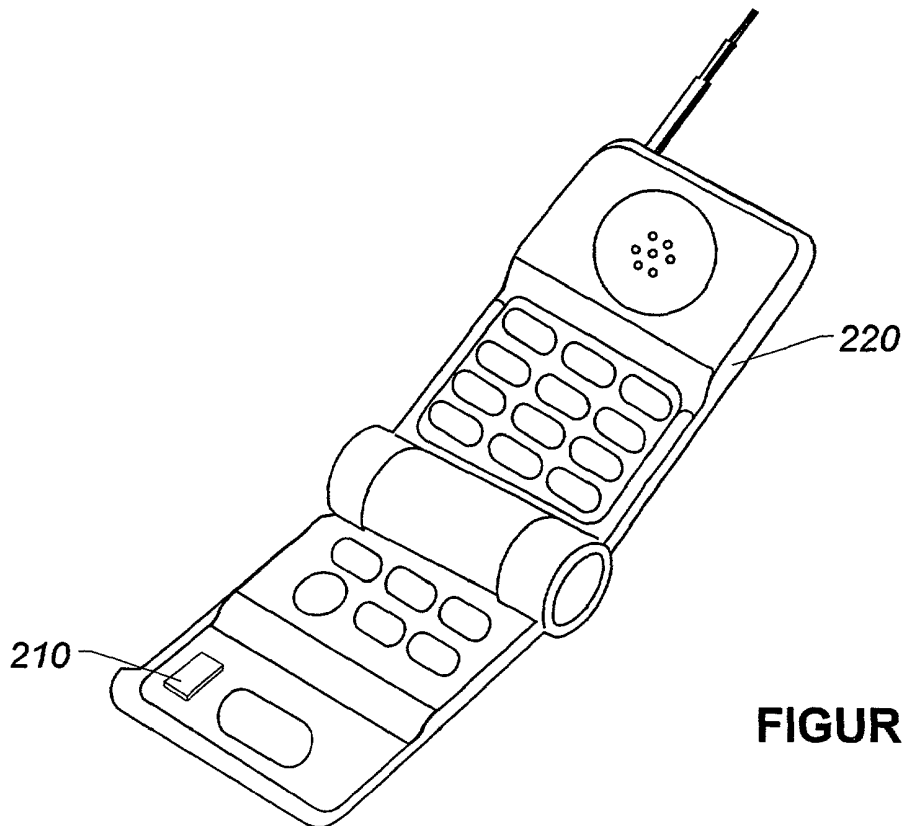


FIGURE 22

U.S. Patent

Oct. 3, 2006

Sheet 22 of 23

US 7,117,485 B2

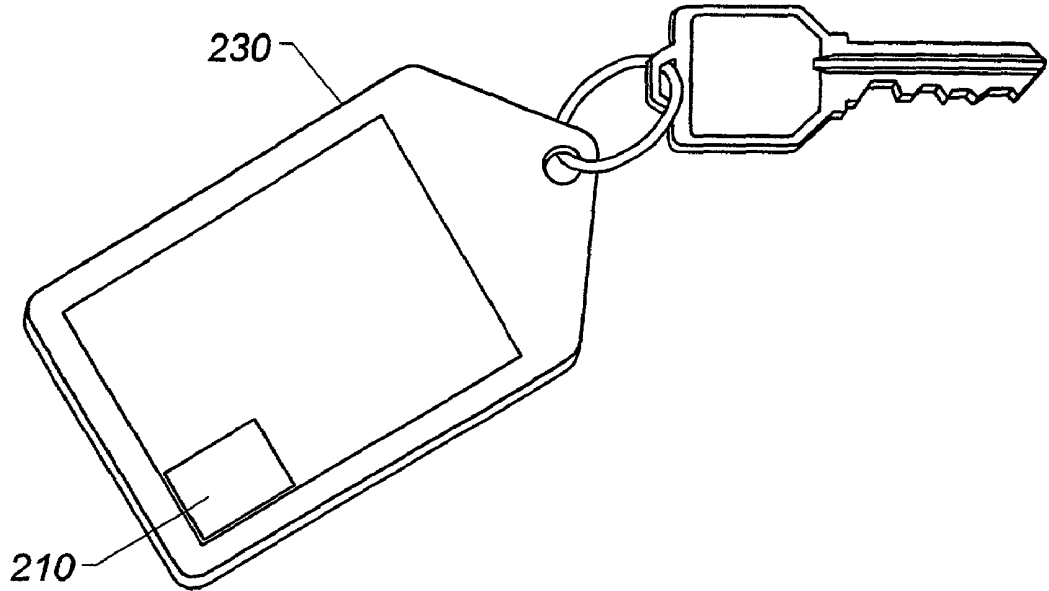


FIGURE 23

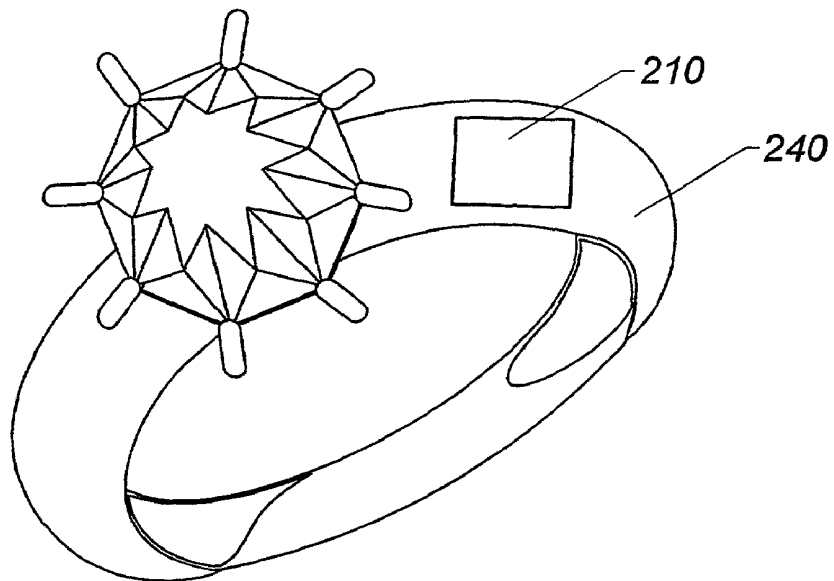


FIGURE 24

U.S. Patent

Oct. 3, 2006

Sheet 23 of 23

US 7,117,485 B2

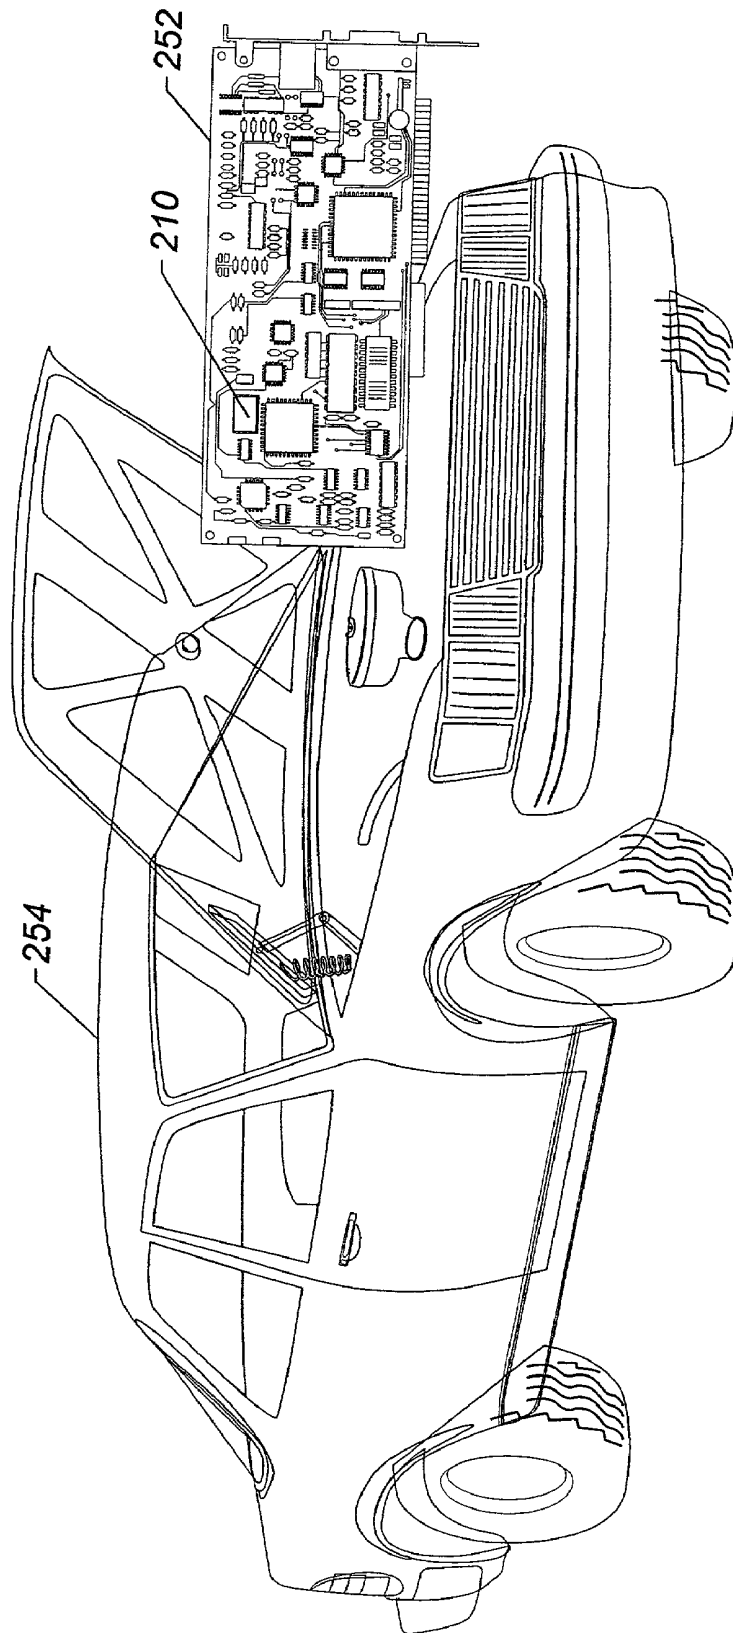


FIGURE 25

US 7,117,485 B2

1

**USING A HIGH LEVEL PROGRAMMING
LANGUAGE WITH A MICROCONTROLLER**

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

Under 35 U.S.C. § 119(e), this application claims benefit of prior U.S. provisional application Ser. No. 60/029,057, filed Oct. 25, 1996.

BACKGROUND OF THE INVENTION

This invention relates in general to the field of programming, and more particularly to using a high level programming language with a smart card or a microcontroller.

Software applications written in the Java high-level programming language have been so designed that an application written in Java can be run on many different computer brands or computer platforms without change. This is accomplished by the following procedure. When a Java application is written, it is compiled into "Class" files containing byte codes that are instructions for a hypothetical computer called a Java Virtual Machine. An implementation of this virtual machine is written for each platform that is supported. When a user wishes to run a particular Java application on a selected platform, the class files compiled from the desired application is loaded onto the selected platform. The Java virtual machine for the selected platform is run, and interprets the byte codes in the class file, thus effectively running the Java application.

Java is described in the following references which are hereby incorporated by reference: (1) Arnold, Ken, and James Gosling, "The Java Programming Language," Addison-Wesley, 1996; (2) James Gosling, Bill Joy, and Guy Steele, "The Java Language Specification," Sun Microsystems, 1996, (web site: http://java.sun.com/doc/language_specification); (3) James Gosling and Henry McGilton, "The Java Language Environment: A White Paper," Sun Microsystems, 1995 (web site: http://java.sun.com/doc/language_environment/); and (4) Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1997. These texts among many others describe how to program using Java.

In order for a Java application to run on a specific platform, a Java virtual machine implementation must be written that will run within the constraints of the platform, and a mechanism must be provided for loading the desired Java application on the platform, again keeping within the constraints of this platform.

Conventional platforms that support Java are typically microprocessor-based computers, with access to relatively large amounts of memory and hard disk storage space. Such microprocessor implementations frequently are used in desktop and personal computers. However, there are no conventional Java implementations on microcontrollers, as would typically be used in a smart card.

Microcontrollers differ from microprocessors in many ways. For example, a microprocessor typically has a central processing unit that requires certain external components (e.g., memory, input controls and output controls) to function properly. A typical microprocessor can access from a megabyte to a gigabyte of memory, and is capable of processing 16, 32, or 64 bits of information or more with a

2

single instruction. In contrast to the microprocessor, a microcontroller includes a central processing unit, memory and other functional elements, all on a single semiconductor substrate, or integrated circuit (e.g., a "chip"). As compared to the relatively large external memory accessed by the microprocessor, the typical microcontroller accesses a much smaller memory. A typical microcontroller can access one to sixty-four kilobytes of built-in memory, with sixteen kilobytes being very common.

There are generally three different types of memory used: random access memory (RAM), read only memory (ROM), and electrically erasable programmable read only memory (EEPROM). In a microcontroller, the amount of each kind of memory available is constrained by the amount of space on the integrated circuit used for each kind of memory. Typically, RAM takes the most space, and is in shortest supply. ROM takes the least space, and is abundant. EEPROM is more abundant than RAM, but less than ROM.

Each kind of memory is suitable for different purposes. Although ROM is the least expensive, it is suitable only for data that is unchanging, such as operating system code. EEPROM is useful for storing data that must be retained when power is removed, but is extremely slow to write. RAM can be written and read at high speed, but is expensive and data in RAM is lost when power is removed. A microprocessor system typically has relatively little ROM and EEPROM, and has 1 to 128 megabytes of RAM, since it is not constrained by what will fit on a single integrated circuit device, and often has access to an external disk memory system that serves as a large writable, non-volatile storage area at a lower cost than EEPROM. However, a microcontroller typically has a small RAM of 0.1 to 2.0 K, 2K to 8K of EEPROM, and 8K -56K of ROM.

Due to the small number of external components required and their small size, microcontrollers frequently are used in integrated circuit cards, such as smart cards. Such smart cards come in a variety of forms, including contact-based cards, which must be inserted into a reader to be used, and contactless cards, which need not be inserted. In fact, microcontrollers with contactless communication are often embedded into specialized forms, such as watches and rings, effectively integrating the functionality of a smart card in an ergonomically attractive manner.

Because of the constrained environment, applications for smart cards are typically written in a low level programming language (e.g., assembly language) to conserve memory.

The integrated circuit card is a secure, robust, tamper-resistant and portable device for storing data. The integrated circuit card is the most personal of personal computers because of its small size and because of the hardware and software data security features unique to the integrated circuit card.

The primary task of the integrated circuit card and the microcontroller on the card is to protect the data stored on the card. Consequently, since its invention in 1974, integrated circuit card technology has been closely guarded on these same security grounds. The cards were first used by French banks as debit cards. In this application, before a financial transaction based on the card is authorized, the card user must demonstrate knowledge of a 4-digit personal identification number (PIN) stored in the card in addition to being in possession of the card. Any information that might contribute to discovering the PIN number on a lost or stolen card was blocked from public distribution. In fact, since nobody could tell what information might be useful in this regard, virtually all information about integrated circuit cards was withheld.

US 7,117,485 B2

3

Due to the concern for security, applications written for integrated circuit cards have unique properties. For example, each application typically is identified with a particular owner or identity. Because applications typically are written in a low-level programming language, such as assembly language, the applications are written for a particular type of microcontroller. Due to the nature of low level programming languages, unauthorized applications may access data on the integrated circuit card. Programs written for an integrated circuit card are identified with a particular identity so that if two identities want to perform the same programming function there must be two copies of some portions of the application on the microcontroller of the integrated circuit card.

Integrated circuit card systems have historically been closed systems. An integrated circuit card contained a dedicated application that was handcrafted to work with a specific terminal application. Security checking when an integrated circuit card was used consisted primarily of making sure that the card application and the terminal application were a matched pair and that the data on the card was valid.

As the popularity of integrated circuit cards grew, it became clear that integrated circuit card users would be averse to carrying a different integrated circuit card for each integrated circuit card application. Therefore, multiple cooperating applications began to be provided on single provider integrated circuit cards. Thus, for example, an automated teller machine (ATM) access card and a debit card may coexist on a single integrated circuit card platform. Nevertheless, this was still a closed system since all the applications in the terminal and the card were built by one provider having explicit knowledge of the other providers.

The paucity of information about integrated circuit cards—particularly information about how to communicate with them and how to program them—has impeded the general application of the integrated circuit card. However, the advent of public digital networking (e.g., the Internet and the World Wide Web) has opened new domains of application for integrated circuit cards. In particular, this has led to a need to load new applications on the card that do not have explicit knowledge of the other providers, but without the possibility of compromising the security of the card. However, typically, this is not practical with conventional cards that are programmed using low level languages.

SUMMARY OF THE INVENTION

In general, in one aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.

Among the advantages of the invention are one or more of the following. New applications may be downloaded to a smart card without compromising the security of the smart card. These applications may be provided by different companies loaded at different times using different terminals. Security is not compromised since the applications are protected against unauthorized access of any application code or data by the security features provided by the Java virtual machine. Smart card applications can be created in high level languages such as Java and Eiffel, using powerful mainstream program development tools. New applications

4

can be quickly prototyped and downloaded to a smart card in a matter of hours without resorting to soft masks. Embedded systems using microcontrollers can also gain many of these advantages for downloading new applications, high level program development, and rapid prototyping by making use of this invention.

Implementations of the invention may include one or more of the following. The high level programming language format of the application may have a class file format and may have a Java programming language format. The processor may be a microcontroller. At least a portion of the memory may be located in the processor.

The application may have been processed from a second application that has a string of characters, and the string of characters may be represented in the first application by an identifier (e.g., an integer).

The processor may be also configured to receive a request from a requester (e.g., a processor or a terminal) to access an element (e.g., an application stored in the memory, data stored in the memory or the communicator) of the card, after receipt of the request, interact with the requester to authenticate an identity of the requester, and based on the identity, selectively grant access to the element.

The memory may also store an access control list for the element. The access control list furnishes an indication of types of access to be granted to the identity, and based on the access control list, the processor selectively grants specific types of access (e.g., reading data, writing data, appending data, creating data, deleting data or executing an application) to the requester.

The application may be one of a several applications stored in the memory. The processor may be further configured to receive a request from a requester to access one of the plurality of applications; after receipt of the request, determine whether said one of the plurality of applications complies with a predetermined set of rules; and based on the determination, selectively grant access to the requester to said one of the plurality of applications. The predetermined rules provide a guide for determining whether said one of the plurality of applications accesses a predetermined region of the memory. The processor may be further configured to authenticate an identity of the requester and grant access to said one of the plurality of applications based on the identity.

The processor may be also configured to interact with the terminal via the communicator to authenticate an identity; determine if the identity has been authenticated; and based on the determination, selectively allow communication between the terminal and the integrated circuit card.

The communicator and the terminal may communicate via communication channels. The processor may also be configured to assign one of the communication channels to the identity when the processor allows the communication between the terminal and the integrated circuit card. The processor may also be configured to assign a session key to the assigned communication channel and use the session key when the processor and the terminal communicate via the assigned communication channel.

The terminal may have a card reader, and the communicator may include a contact for communicating with the card reader. The terminal may have a wireless communication device, and the communicator may include a wireless transceiver for communicating with the wireless communication device. The terminal may have a wireless communication device, and the communicator may include a wireless transmitter for communicating with the wireless communication device.

US 7,117,485 B2

5

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes storing an interpreter and at least one application having a high level programming language format in a memory of the integrated circuit card. A processor of the integrated circuit card uses the interpreter to interpret the at least one application for execution, and the processor uses a communicator of the card when communicating between the processor and the terminal.

In general, in another aspect, the invention features a smart card. The smart card includes a memory that stores a Java interpreter and a processor that is configured to use the interpreter to interpret a Java application for execution.

In general, in another aspect, the invention features a microcontroller that has a semiconductor substrate and a memory located in the substrate. A programming language interpreter is stored in the memory and is configured to implement security checks. A central processing unit is located in the substrate and is coupled to the memory.

Implementations of the invention may include one or more of the following. The interpreter may be a Java byte code interpreter. The security checks may include establishing firewalls and may include enforcing a sandbox security model.

In general, in another aspect, the invention features a smart card that has a programming language interpreter stored in a memory of the card. The interpreter is configured to implement security check. A central processing unit of the card is coupled to the memory.

In general, in another aspect, the invention features an integrated circuit card that is used with a terminal. The card includes a communicator and a memory that stores an interpreter and first instructions of a first application. The first instructions have been converted from second instructions of a second application. The integrated circuit card includes a processor that is coupled to the memory and is configured to use the interpreter to execute the first instructions and to communicate with the terminal via the communicator.

Implementations of the invention may include one or more of the following. The first and/or second applications may have class file format(s). The first and/or second applications may include byte codes, such as Java byte codes. The first instructions may be generalized or renumbered versions of the second instructions. The second instructions may include constant references, and the first instructions may include constants that replace the constant references of the second instructions. The second instructions may include references, and the references may shift location during the conversion of the second instructions to the first instructions. The first instructions may be relinked to the references after the shifting. The first instructions may include byte codes for a first type of virtual machine, and the second instructions may include byte codes for a second type of virtual machine. The first type is different from the second type.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes converting second instructions of a second application to first instructions of a first application; storing the first instructions in a memory of the integrated circuit card; and using an interpreter of the integrated circuit card to execute the first instructions.

In general, in another aspect, the invention features an integrated circuit for use with a terminal. The integrated circuit card has a communicator that is configured to communicate with the terminal and a memory that stores a first

6

application that has been processed from a second application having a string of characters. The string of characters are represented in the first application by an identifier. The integrated circuit card includes a processor that is coupled to the memory. The processor is configured to use the interpreter to interpret the first application for execution and to use the communicator to communicate with the terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes processing a second application to create a first application. The second application has a string of characters. The string of characters is represented by an identifier in the second application. An interpreter and the first application are stored in a memory of the integrated circuit card. A processor uses an interpreter to interpret the first application for execution.

In general, in another aspect, the invention features a microcontroller that includes a memory which stores an application and an interpreter. The application has a class file format. A processor of the microcontroller is coupled to the memory and is configured to use the interpreter to interpret the application for execution.

In implementations of the invention, the microcontroller may also include a communicator that is configured to communicate with a terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes storing a first application in a memory of the integrated circuit card, storing a second application in the memory of the integrated circuit card, and creating a firewall that isolates the first and second applications so that the second application cannot access either the first application or data associated with the first application.

In general, in another aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a communicator that is configured to communicate with the terminal, a memory and a processor. The memory stores applications, and each application has a high level programming language format. The memory also stores an interpreter. The processor is coupled to the memory and is configured to: a.) use the interpreter to interpret the applications for execution, b.) use the interpreter to create a firewall to isolate the applications from each other, and c.) use the communicator to communicate with the terminal.

Other advantages and features will become apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a block diagram of an integrated card system.

FIG. 2 is a flow diagram illustrating the preparation of Java applications to be downloaded to an integrated circuit card.

FIG. 3 is a block diagram of the files used and generated by the card class file converter.

FIG. 4 is a block diagram illustrating the transformation of application class file(s) into a card class file.

FIG. 5 is a flow diagram illustrating the working of the class file converter.

FIG. 6 is a flow diagram illustrating the modification of the byte codes.

FIG. 7 is a block diagram illustrating the transformation of specific byte codes into general byte codes.

FIG. 8 is a block diagram illustrating the replacement of constant references with constants.

FIG. 9 is a block diagram illustrating the replacement of references with their updated values.

US 7,117,485 B2

7

FIG. 10 is a block diagram illustrating renumbering of original byte codes.

FIG. 11 is a block diagram illustrating translation of original byte codes for a different virtual machine architecture.

FIG. 12 is a block diagram illustrating loading applications into an integrated circuit card.

FIG. 13 is a block diagram illustrating executing applications in an integrated circuit card.

FIG. 14 is a schematic diagram illustrating memory organization for ROM, RAM and EEPROM.

FIG. 15 is a flow diagram illustrating the overall architecture of the Card Java virtual machine.

FIG. 16 is a flow diagram illustrating method execution in the Card Java virtual machine with the security checks.

FIG. 17 is a flow diagram illustrating byte code execution in the Card Java virtual machine.

FIG. 18 is a flow diagram illustrating method execution in the Card Java virtual machine without the security checks.

FIG. 19 is a block diagram illustrating the association between card applications and identities.

FIG. 20 is a block diagram illustrating the access rights of a specific running application.

FIG. 21 is a perspective view of a microcontroller on a smart card.

FIG. 22 is a perspective view of a microcontroller on a telephone.

FIG. 23 is a perspective view of a microcontroller on a key ring.

FIG. 24 is a perspective view of a microcontroller on a ring.

FIG. 25 is a perspective view of a microcontroller on a circuit card of an automobile.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, an integrated circuit card 10 (e.g., a smart card) is constructed to provide a high level, Java-based, multiple application programming and execution environment. The integrated circuit card 10 has a communicator 12a that is configured to communicate with a terminal communicator 12b of a terminal 14. In some embodiments, the integrated circuit card 10 is a smart card with an 8 bit microcontroller, 512 bytes of RAM, 4K bytes of EEPROM, and 20K of ROM; the terminal communicator 12b is a conventional contact smart card reader; and the terminal 14 is a conventional personal computer running the Windows NT operating system supporting the personal computer smart card (PC/SC) standard and providing Java development support.

In some embodiments, the microcontroller, memory and communicator are embedded in a plastic card that has substantially the same dimensions as a typical credit card. In other embodiments, the microcontroller, memory and communicator are mounted within bases other than a plastic card, such as jewelry (e.g., watches, rings or bracelets), automotive equipment, telecommunication equipment (e.g., subscriber identity module (SIM) cards), security devices (e.g., cryptographic modules) and appliances.

The terminal 14 prepares and downloads Java applications to the integrated circuit card 10 using the terminal communicator 12b. The terminal communicator 12b is a communications device capable of establishing a communications channel between the integrated circuit card 10 and the terminal 14. Some communication options include contact card readers, wireless communications via radio fre-

8

quency or infrared techniques, serial communication protocols, packet communication protocols, ISO 7816 communication protocol, to name a few.

The terminal 14 can also interact with applications running in the integrated circuit card 10. In some cases, different terminals may be used for these purposes. For example, one kind of terminal may be used to prepare applications, different terminals could be used to download the applications, and yet other terminals could be used to run the various applications. Terminals can be automated teller machines (ATMs), point-of-sale terminals, door security systems, toll payment systems, access control systems, or any other system that communicates with an integrated circuit card or microcontroller.

The integrated circuit card 10 contains a card Java virtual machine (Card JVM) 16, which is used to interpret applications which are contained on the card 10.

Referring to FIG. 2, the Java application 20 includes three Java source code files A.java 20a, B.java 20b, and C.java 20c. These source code files are prepared and compiled in a Java application development environment 22. When the Java application 20 is compiled by the development environment 22, application class files 24 are produced, with these class files A.class 24a, B.class 24b, and C.class 24c corresponding to their respective class Java source code 20a, 20b, and 20c. The application class files 24 follow the standard class file format as documented in chapter 4 of the Java virtual machine specification by Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1996. These application class files 24 are fed into the card class file converter 26, which consolidates and compresses the files, producing a single card class file 27. The card class file 27 is loaded to the integrated circuit card 10 using a conventional card loader 28.

Referring to FIG. 3, the card class file converter 26 is a class file postprocessor that processes a set of class files 24 that are encoded in the standard Java class file format, optionally using a string to ID input map file 30 to produce a Java card class file 27 in a card class file format. One such card class file format is described in Appendix A which is hereby incorporated by reference. In addition, in some embodiments, the card class file converter 26 produces a string to ID output map file 32 that is used as input for a subsequent execution of the card class file converter.

In some embodiments, in order for the string to ID mapping to be consistent with a previously generated card class file (in the case where multiple class files reference the same strings), the card class file converter 26 can accept previously defined string to ID mappings from a string to ID input map file 30. In the absence of such a file, the IDs are generated by the card class file converter 26. Appendix B, which is hereby incorporated by reference, describes one possible way of implementing and producing the string to ID input map file 30 and string to ID output map file 32 and illustrates this mapping via an example.

Referring to FIG. 4, a typical application class file 24a includes class file information 41; a class constant pool 42; class, fields created, interfaces referenced, and method information 43; and various attribute information 44, as detailed in aforementioned Java Virtual Machine Specification. Note that much of the attribute information 44 is not needed for this embodiment and is eliminated 45 by the card class file converter 26. Eliminated attributes include SourceFile, ConstantValue, Exceptions, LineNumberTable, LocalvariableTable, and any optional vendor attributes. The typical card class file 27 as described in Appendix A is derived from the application class files 24 in the following manner. The card

US 7,117,485 B2

9

class file information 46 is derived from the aggregate class file information 41 of all application class files 24a, 24b, and 24c. The card class file constant pool 47 is derived from the aggregate class constant pool 42 of all application class files 24a, 24b, and 24c. The card class, fields created, interfaces referenced, and method information 48 is derived from the aggregate class, fields created, interfaces referenced, and method information 43 of all application class files 24a, 24b, and 24c. The card attribute information 49 in this embodiment is derived from only the code attribute of the aggregate attribute information 44 of all application class files 24a, 24b, and 24c.

To avoid dynamic linking in the card, all the information that is distributed across several Java class files 24a, 24b, and 24c that form the application 24, are coalesced into one card class file 27 by the process shown in the flowchart in FIG. 5. The first class file to be processed is selected 51a. The constant pool 42 is compacted 51b in the following manner. All objects, classes, fields, methods referenced in a Java class file 24a are identified by using strings in the constant pool 42 of the class file 24a. The card class file converter 26 compacts the constant pool 42 found in the Java class file 24a into an optimized version. This compaction is achieved by mapping all the strings found in the class file constant pool 42 into integers (the size of which is micro-controller architecture dependent). These integers are also referred to as IDs. Each ID uniquely identifies a particular object, class, field or method in the application 20. Therefore, the card class file converter 26 replaces the strings in the Java class file constant pool 42 with its corresponding unique ID. Appendix B shows an example application HelloSmartCard.java, with a table below illustrating the IDs corresponding to the strings found in the constant pool of the class file for this application. The IDs used for this example are 16-bit unsigned integers.

Next, the card class file converter 26 checks for unsupported features in the Code attribute of the input Java class file 24a. The Card JVM 16 only supports a subset of the full Java byte codes as described in Appendix C, which is hereby incorporated by reference. Hence, the card class file converter 26 checks for unsupported byte codes in the Code attribute of the Java class file 24a. If any unsupported byte codes are found 52, the card class file converter flags an error and stops conversion 53. The program code fragment marked "A" in APPENDIX D shows how these spurious byte codes are apprehended. Another level of checking can be performed by requiring the standard Java development environment 22 to compile the application 20 with a '-g' flag. Based on the aforementioned Java virtual machine specification, this option requires the Java compiler to place information about the variables used in a Java application 20 in the LocalVariableTable attribute of the class file 24a. The card class file converter 26 uses this information to check if the Java class file 24a references data types not supported by the Java card.

Next, the card class file converter 26 discards all the unnecessary parts 51c of the Java class file 24a not required for interpretation. A Java class file 24a stores information pertaining to the byte codes in the class file in the Attributes section 44 of the Java class file. Attributes that are not required for interpretation by the card JVM 16, such as SourceFile, ConstantValue, Exceptions, LineNumberTable, and LocalVariableTable may be safely discarded 45. The only attribute that is retained is the Code attribute. The Code attribute contains the byte codes that correspond to the methods in the Java class file 24a.

10

Modifying the byte codes 54 involves examining the Code attribute information 44 for each method in the class file, and modifying the operands of byte codes that refer to entries in the Java class file constant pool 42 to reflect the entries in the card class file constant pool 47. In some embodiments, the byte codes are also modified, as described below.

Modifying the byte codes 54 involves five passes (with two optional passes) as described by the flowchart in FIG. 6. The original byte codes 60 are found in the Code attribute 44 of the Java class file 24a being processed. The first pass 61 records all the jumps and their destinations in the original byte codes. During later byte code translation, some single byte code may be translated to dual or triple bytes. FIG. 7 illustrates an example wherein byte code ILOAD_0 is replaced with two bytes, byte code ILOAD and argument 0. When this is done, the code size changes, requiring adjustment of any jump destinations which are affected. Therefore, before these transformations are made, the original byte codes 60 are analyzed for any jump byte codes and a note made of their position and current destination. The program code fragment marked "B" in Appendix D shows how these jumps are recorded. Appendix D is hereby incorporated by reference.

Once the jumps are recorded, if the optional byte code translation is not being performed 62, the card class file converter 26 may proceed to the third pass 64.

Otherwise, the card class file converter converts specific byte codes into generic byte codes. Typically, the translated byte codes are not interpreted in the Card JVM 16 but are supported by converting the byte codes into equivalent byte codes that can be interpreted by the Card JVM 16 (see FIG. 7). The byte codes 70 may be replaced with another semantically equivalent but different byte codes 72. This generally entails the translation of short single specific byte codes such as ILOAD_0 into their more general versions. For example, ILOAD_0 may be replaced by byte code ILOAD with an argument 0. This translation is done to reduce the number of byte codes translated by the Card JVM 16, consequently reducing the complexity and code space requirements for the Card JVM 16. The program code fragment marked "C" in Appendix D shows how these translations are made. Note that such translations increase the size of the resulting byte code and force the re-computation of any jumps which are affected.

In the third pass 64, the card class file converter rebuilds constant references via elimination of the strings used to denote these constants. FIG. 8 shows an example wherein the byte code LDC 80 referring to constant "18" found via an index in the Java class file 24a constant pool 42 may be translated into BIPUSH byte code 82. In this pass the card class file converter 26 modifies the operands to all the byte codes that refer to entries in the Java class file constant pool 42 to reflect their new location in the card class file constant pool 47. FIG. 9 shows an example wherein the argument to a byte code, INVOKESTATIC 90, refers to an entry in the Java class file constant pool 42 that is modified to reflect the new location of that entry in the card class file constant pool 47. The modified operand 94 shows this transformation. The program code fragment marked "D" in Appendix D shows how these modifications are made.

Once the constant references are relinked, if the optional byte code modification is not being performed, the card class file converter may proceed to the fifth and final pass 67.

Otherwise, the card class file converter modifies the original byte codes into a different set of byte codes supported by the particular Card JVM 16 being used. One

US 7,117,485 B2

11

potential modification renumbers the original byte codes **60** into Card JVM **16** byte codes (see FIG. **10**). This renumbering causes the byte codes **100** in the original byte codes **60** to be modified into a renumbered byte codes **102**. Byte code ILOAD recognized by value 21 may be renumbered to be recognized by value 50. This modification may be done for optimizing the type tests (also known in prior art as Pass **3** checks) in the Card JVM **16**. The program code fragment marked "E" in Appendix D shows an implementation of this embodiment. This modification may be done in order to reduce the program space required by the Card JVM **16** to interpret the byte code. Essentially this modification regroups the byte codes into Card JVM **16** byte codes so that byte codes with similar operands, results are grouped together, and there are no gaps between Card JVM **16** byte codes. This allows the Card JVM **16** to efficiently check Card JVM **16** byte codes and validate types as it executes.

In some embodiments, the card class file converter modifies the original byte codes **60** into a different set of byte codes designed for a different virtual machine architecture, as shown in FIG. **11**. The Java byte code ILOAD **112** intended for use on a word stack **114** may be replaced by Card JVM **16** byte code ILOAD_B **116** to be used on a byte stack **118**. An element in a word stack **114** requires allocating 4 bytes of stack space, whereas an element in the byte stack **118** requires only one byte of stack space. Although this option may provide an increase in execution speed, it risks losing the security features available in the original byte codes.

Since the previous steps **63**, **64** or **66** may have changed the size of the byte codes **60** the card class file converter **26** has to relink **67** any jumps which have been effected. Since the jumps were recorded in the first step **61** of the card class file converter **26**, this adjustment is carried out by fixing the jump destinations to their appropriate values. The program code fragment marked "F" in Appendix D shows how these jumps are fixed.

The card class file converter now has modified byte codes **68** that is equivalent to the original byte codes **60** ready for loading. The translation from the Java class file **24a** to the card class file **27** is now complete.

Referring back to FIG. **5**, if more class files **24** remain to be processed **55** the previous steps **51a**, **51b**, **51c**, **52** and **54** are repeated for each remaining class file. The card class file converter **26** gathers **56** the maps and modified byte codes for the classes **24** that have been processed, places them as an aggregate and generates **57** a card class file **27**. If required, the card class file converter **26** generates a string to ID output map file **32**, that contains a list of all the new IDs allocated for the strings encountered in the constant pool **42** of the Java class files **24** during the translation.

Referring to FIG. **12**, the card loader **28** within the terminal **14** sends a card class file to the loading and execution control **120** within the integrated circuit card **10** using standard ISO 7816 commands. The loading and execution control **120** with a card operating system **122**, which provides the necessary system resources, including support for a card file system **124**, which can be used to store several card applications **126**. Many conventional card loaders are written in low level languages, supported by the card operating system **122**. In the preferred embodiment, the bootstrap loader is written in Java, and the integrated circuit card **10** includes a Java virtual machine to run this application. A Java implementation of the loading and execution control **120** is illustrated in Appendix E which is hereby incorporated by reference. The loading and execution control **120** receives the card class file **26** and produces a Java card

12

application **126x** stored in the card file system **126** in the EEPROM of the integrated circuit card **10**. Multiple Java card applications **126x**, **126y**, and **126z** can be stored in a single card in this manner. The loading and execution control **120** supports commands whereby the terminal **14** can select which Java card application to run immediately, or upon the next card reset.

Referring to FIG. **13**, upon receiving a reset or an execution command from the loading and execution control **120**, the Card Java Virtual Machine (Card JVM) **16** begins execution at a predetermined method (for example, main) of the selected class in the selected Java Card application **126z**. The Card JVM **16** provides the Java card application **126z** access to the underlying card operating system **122**, which provides capabilities such as I/O, EEPROM support, file systems, access control, and other system functions using native Java methods as illustrated in Appendix F which is hereby incorporated by reference.

The selected Java card application **126z** communicates with an appropriate application in the terminal **14** using the communicator **12a** to establish a communication channel to the terminal **14**. Data from the communicator **12a** to the terminal **14** passes through a communicator driver **132** in the terminal, which is specifically written to handle the communications protocol used by the communicator **12a**. The data then passes to an integrated circuit card driver **134**, which is specifically written to address the capabilities of the particular integrated circuit card **10** being used, and provides high level software services to the terminal application **136**. In the preferred embodiment, this driver would be appropriate PC/SC Smartcard Service Provider (SSP) software. The data then passes to the terminal application **136**, which must handle the capabilities provided by the particular card application **126z** being run. In this manner, commands and responses pass back and forth between the terminal application **136** and the selected card application **126z**. The terminal application interacts with the user, receiving commands from the user, some of which are passed to the selected Java card application **126z**, and receiving responses from the Java card application **126z**, which are processed and passed back to the user.

Referring to FIG. **14**, the Card JVM **16** is an interpreter that interprets a card application **126x**. The memory resources in the microcontroller that impact the Card JVM **16** are the Card ROM **140**, Card RAM **141** and the Card EEPROM **142**. The Card ROM **140** is used to store the Card JVM **16** and the card operating system **122**. Card ROM **140** may also be used to store fixed card applications **140a** and class libraries **140b**. Loadable applications **141a**, **141b** and libraries **141c** may also be stored in Card RAM **141**. The Card JVM **16** interprets a card application **141a**, **141b**, or **140a**. The Card JVM **16** uses the Card RAM to store the VM stack **144a** and system state variables **144b**. The Card JVM **16** keeps track of the operations performed via the VM stack **144a**. The objects created by the Card JVM **16** are either on the RAM heap **144c**, in the EEPROM heap **146a**, or in the file system **147**.

All of the heap manipulated by the Card JVM **16** may be stored in the Card RAM **141** as a RAM Heap **144c**, or it may be distributed across to the Card EEPROM **142** as a EEPROM Heap **146a**. Card RAM **141** is also used for recording the state of the system stack **148** that is used by routines written in the native code of the microcontroller. The Card JVM **16** uses the Card EEPROM **142** to store application data either in the EEPROM heap **146a** or in the file system **147**. Application data stored in a file may be manipulated via an interface to the card operating system

US 7,117,485 B2

13

122. This interface is provided by a class library **140b** stored in Card ROM **140**, by a loadable class library **141c** stored in Card EEPROM **142**. One such interface is described in Appendix F. Applications and data in the card are isolated by a firewall mechanism **149**.

To cope with the limited resources available on micro-controllers, the Card JVM **16** implements a strict subset of the Java programming language. Consequently, a Java application **20** compiles into a class file that contains a strict subset of Java byte codes. This enables application programmers to program in this strict subset of Java and still maintain compatibility with existing Java Virtual Machines. The semantics of the Java byte codes interpreted by the Card JVM **16** are described in the aforementioned Java Virtual Machine Specification. The subset of byte codes interpreted by the Card JVM **16** can be found in Appendix C. The card class file converter **26** checks the Java application **20** to ensure use of only the features available in this subset and converts into a form that is understood and interpreted by the Card JVM **16**.

In other embodiments, the Card JVM **16** is designed to interpret a different set or augmented set of byte codes **116**. Although a different byte code set might lead to some performance improvements, departing from a strict Java subset may not be desirable from the point of view of security that is present in the original Java byte codes or compatibility with mainstream Java development tools.

All Card JVM **16** applications **126** have a defined entry point denoted by a class and a method in the class. This entry point is mapped in the string to ID input map **30** and assigned by the card class file converter **26**. Classes, methods and fields within a Java application **20** are assigned IDs by the card class file converter **26**. For example, the ID corresponding to the main application class may be defined as Fool and the ID corresponding to its main method, such as "main()V" could be defined as F002.

The overall execution architecture of the Card JVM is described by the flowchart in FIG. **15**. Execution of the Card JVM **16** begins at the execution control **120**, which chooses a card application **126z** to execute. It proceeds by finding and assigning an entry point **152** (a method) in this card application for the Card JVM **16** to interpret. The Card JVM **16** interprets the method **153**. If the interpretation proceeds successfully **154**, the Card JVM **16** reports success **155** returning control back to the execution control **120**. If in the course of interpretation **153** the Card JVM **16** encounters an unhandled error or exception (typically a resource limitation or a security violation), the Card JVM **16** stops **156** and reports the appropriate error to the terminal **14**.

An essential part of the Card JVM **16** is a subroutine that handles the execution of the byte codes. This subroutine is described by the flowchart in FIG. **16**. Given a method **160** it executes the byte codes in this method. The subroutine starts by preparing for the parameters of this method **161**. This involves setting the VM stack **144a** pointer, VM stack **144a** frame limits, and setting the program counter to the first byte code of the method.

Next, the method flags are checked **162**. If the method is flagged native, then the method is actually a call to native method code (subroutine written in the microcontroller's native processor code). In this case, the Card JVM **16** prepares for an efficient call **163** and return to the native code subroutine. The parameters to the native method may be passed on the VM stack **144a** or via the System stack **148**. The appropriate security checks are made and the native method subroutine is called. On return, the result (if any) of

14

the native method subroutine is placed on the VM stack **144a** so that it may be accessed by the next byte code to be executed.

The dispatch loop **164** of the Card JVM **16** is then entered. The byte code dispatch loop is responsible for preparing, executing, and retiring each byte code. The loop terminates when it finishes interpreting the byte codes in the method **160**, or when the Card JVM **16** encounters a resource limitation or a security violation.

If a previous byte code caused a branch to be taken **165** the Card JVM prepares for the branch **165a**. The next byte code is retrieved **165b**. In order to keep the cost of processing each byte code down, as many common elements such as the byte code arguments, length, type are extracted and stored.

To provide the security offered by the security model of the programming language, byte codes in the class file must be verified and determined conformant to this model. These checks are typically carried out in prior art by a program referred to as the byte code verifier, which operates in four passes as described in the Java Virtual Machine Specification. To offer the run-time security that is guaranteed by the byte code verifier, the Card JVM **16** must perform the checks that pertain to the Pass **3** and Pass **4** of the verifier. This checking can be bypassed by the Card JVM **16** if it can be guaranteed (which is almost impossible to do) that the byte codes **60** interpreted by the Card JVM **16** are secure. At the minimum, code security can be maintained as long as object references cannot be faked and the VM stack **144a** and local variable bounds are observed. This requires checking the state of the VM stack **144a** with respect to the byte code being executed.

To enforce the security model of the programming language, a 256-byte table is created as shown in Appendix G which is hereby incorporated by reference. This table is indexed by the byte code number. This table contains the type and length information associated with the indexing byte code. It is encoded with the first 5 bits representing type, and the last 3 bits representing length. The type and length of the byte code is indexed directly from the table by the byte code number. This type and length is then used for checking as shown in Appendix H which is hereby incorporated by reference. In Appendix H, the checking process begins by decoding the length and type from the table in Appendix G which is hereby incorporated by reference. The length is used to increment the program counter. The type is used first for pre-execution checking, to insure that the data types on the VM stack **144a** are correct for the byte code that is about to be executed. The 256 bytes of ROM for table storage allows the original Java byte codes to be run in the Card JVM **16** and minimizes the changes required to the Java class file to be loaded in the card. Additional Java byte codes can be easily supported since it is relatively easy to update the appropriate table entries.

In other embodiments, as shown in FIG. **10**, the Java byte codes in the method are renumbered in such a manner that the byte code type and length information stored in the table in Appendix H is implicit in the reordering. Appendix H is hereby incorporated by reference. Consequently, the checks that must be performed on the state of the VM stack **144a** and the byte code being processed does not have to involve a table look up. The checks can be performed by set of simple comparisons as shown in Appendix I which is hereby incorporated by reference. This embodiment is preferable when ROM space is at a premium, since it eliminates a 256-byte table. However adding new byte codes to the set of supported byte codes has to be carefully thought out since

US 7,117,485 B2

15

the new byte codes have to fit in the implicit numbering scheme of the supported byte codes.

In another embodiment, the Card JVM 16 chooses not to perform any security checks in favor of Card JVM 16 execution speed. This is illustrated in the flowchart in FIG. 18. The flow chart in FIG. 18 is the same as that of FIG. 16 with the security checks removed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

The Card JVM 16 may enforce other security checks as well. If the byte code may reference a local variable, the Card JVM 16 checks if this reference is valid, throwing an error if it is not. If the reference is valid, the Card JVM 16 stores the type of the local variable for future checking. The VM stack 144a pointer is checked to see if it is still in a valid range. If not an exception is thrown. The byte code number is checked. If it is not supported, an exception is thrown.

Finally, the byte code itself is dispatched 165d. The byte codes translated by the Card JVM 16 are listed in Appendix C. The semantics of the byte codes are described in the aforementioned Java Virtual Machine Specification with regard to the state of the VM stack 144a before and after the dispatch of the byte code. Note also that some byte codes (the byte codes, INVOKESTATIC, INVOKESPECIAL, INVOKENONVIRTUAL and INVOKEVIRTUAL) may cause reentry into the Card JVM 16, requiring processing to begin at the entry of the subroutine 161. FIG. 17 shows the flowchart of the byte code execution routine. The routine is given a byte code 171 to execute. The Card JVM 16 executes 172 the instructions required for the byte code. If in the course of executing the Card JVM 16 encounters a resource limitation 173, it returns an error 156. This error is returned to the terminal 16 by the Card JVM 16. If the byte code executes successfully, it returns a success 175.

After execution, the type of the result is used to set the VM stack 144a state correctly 165e, properly flagging the data types on the VM stack 144a. The byte code information gathered previously 165b from the byte code info table is used to set the state of the VM stack 144a in accordance with the byte code that just executed.

In other embodiments, setting the output state of the VM stack 144a with respect to the byte code executed is simplified if the byte code is renumbered. This is shown in Appendix I which is hereby incorporated by reference.

In yet another embodiment, the Card JVM 16 may bypass setting the output state of the VM stack 144a in favor of Card JVM 16 execution speed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

After the byte code has been executed, the byte code is retired 165f. This involves popping arguments off the VM stack 144a. Once byte code processing is completed, the loop 164 is repeated for the next byte code for the method.

Once the dispatch loop 164 terminates, the VM stack 144a is emptied 166. This prevents any object references filtering down to other Card JVM 16 invocations and breaking the Card JVM's 16 security. Termination 167 of the byte code dispatch loop 164 indicates that the Card JVM 16 has completed executing the requested method.

To isolate data and applications in the integrated circuit card 10 from each other, the integrated circuit card 10 relies on the firewall mechanism 149 provided by the Card JVM 16. Because the Card JVM implements the standard pass 3 and pass 4 verifier checks, it detects any attempt by an application to reference the data or code space used by another application, and flag a security error 156. For example, conventional low level applications can cast non-

16

reference data types into references, thereby enabling access to unauthorized memory space, and violating security. With this invention, such an attempt by a card application 126z to use a non-reference data type as a reference will trigger a security violation 156. In conventional Java, this protected application environment is referred to as the sandbox application-interpretation environment.

However, these firewall facilities do not work independently. In fact, the facilities are overlapping and mutually reinforcing with conventional access control lists and encryption mechanisms shown in the following table:

	Access Control Lists	Virtual Machine	Encryption
Data Protection	access control before operation	access only to own namespace	data to another program encrypted
Program Protection	access control before execution	execution only on correct types	encrypted in program's namespace
Communication Protection	access control on channels	channel controls in own namespace	only mutually authenticated parties can communicate

Taken together, these facilities isolate both data and applications on the integrated circuit card 10 and ensure that each card application 126 can access only the authorized resources of the integrated circuit card 10.

Referring to FIG. 19, card applications 126x, 126y, 126z can be endowed with specific privileges when the card applications 126 execute. These privileges determine, for example, which data files the card applications 126 can access and what operations the card applications 126 can perform on the file system 147. The privileges granted to the card applications 126 are normally set at the time that a particular card application 126z is started by the user, typically from the terminal 14.

The integrated circuit card 10 uses cryptographic identification verification methods to associate an identity 190 (e.g., identities 190a, 190b and 190c) and hence, a set of privileges to the execution of the card application 126. The association of the specific identity 190c to the card application 126z is made when the card application 126z begins execution, thus creating a specific running application 200, as shown in FIG. 20. The identity 190 is a unique legible text string reliably associated with an identity token. The identity token (e.g., a personal identification number (PIN) or a RSA private key) is an encryption key.

Referring to FIG. 20, in order to run a specific card application 126z, the identity 190c of the card application 126z must be authenticated. The identity 190c is authenticated by demonstrating knowledge of the identity token associated with the identity 190c. Therefore, in order to run the card application 126z, an agent (e.g., a card holder or another application wishing to run the application) must show that it possesses or knows the application's identity-defining encryption key.

One way to demonstrate possession of an encryption key is simply to expose the key itself. PIN verification is an example of this form of authentication. Another way to demonstrate the possession of an encryption key without actually exposing the key itself is to show the ability to encrypt or decrypt plain text with the key.

US 7,117,485 B2

17

Thus, a specific running application **200** on the integrated circuit card **10** includes a card application **126z** plus an authenticated identity **190c**. No card application **126** can be run without both of these elements being in place. The card application **126z** defines data processing operations to be performed, and the authenticated identity **190c** determines on what computational objects those operations may be performed. For example, a specific application **126z** can only access identity **C**'s files **202** in the file system **147** associated with the specific identity **190c**, and the specific card application **126z** cannot access other files **204** that are associated with identities other than the specific identity **190c**.

The integrated circuit card **10** may take additional steps to ensure application and data isolation. The integrated circuit card **10** furnishes three software features sets: authenticated-identity access control lists; a Java-based virtual machine; and one-time session encryption keys to protect data files, application execution, and communication channels, respectively. Collectively, for one embodiment, these features sets provide the application data firewalls **149** for one embodiment. The following discusses each software feature set and then shows how the three sets work together to insure application and data isolation on the integrated circuit card **10**.

An access control list (ACL) is associated with every computational object (e.g., a data file or a communication channel) on the integrated circuit card **10** that is to be protected, i.e., to which access is to be controlled. An entry on an ACL (for a particular computational object) is in a data format referred to as an e-tuple:

```
type:identity:permissions
```

The type field indicates the type of the following identity (in the identity field), e.g., a user (e.g., "John Smith"), or a group. The permissions field indicates a list of operations (e.g., read, append and update) that can be performed by the identity on the computational object.

As an example, for a data file that has the ACL entry:
USER:AcmeAirlines:RAU,

any application whose identity is "AcmeAirlines" can read ("R"), append ("A") and update ("U") the data file. In addition, the ACL may be used selectively to permit the creation and deletion of data files. Furthermore, the ACL may be used selectively to permit execution of an application.

Whenever a computational object is accessed by a running application **200**, the access is intercepted by the Card JVM **16** and passed to the card operating system **122**, which determines if there is an ACL associated with the object. If there is an associated ACL, then the identity **190c** associated with the running application **200** is matched on the ACL. If the identity is not found or if the identity is not permitted for the type of access that is being requested, then the access is denied. Otherwise, the access is allowed to proceed.

Referring to FIG. **13**, to prevent the potential problems due to the single data path between the integrated circuit card **10** and the terminal **14**, communication channel isolation is accomplished by including in the identity authentication process the exchange of a one-time session key **209** between the a card application **126z** and the terminal application **136**. The key **209** is then used to encrypt subsequent traffic between the authenticating terminal application **136** and the authenticated card application **126z**. Given the one-time session key **209**, a rogue terminal application can neither "listen in" on an authenticated communication between the terminal **14** and the integrated circuit card **10**,

18

nor can the rogue terminal application "spoo" the card application into performing unauthorized operations on its behalf.

Encryption and decryption of card/terminal traffic can be handled either by the card operating system **122** or by the card application itself **126z**. In the former case, the communication with the terminal **14** is being encrypted transparently to the application, and message traffic arrives decrypted in the data space of the application. In the latter case, the card application **126z** elects to perform encryption and decryption to provide an extra layer of security since the application could encrypt data as soon as it was created and would decrypt data only when it was about to be used. Otherwise, the data would remain encrypted with the session key **209**.

Thus, the application firewall includes three mutually reinforcing software-sets. Data files are protected by authenticated-identity access control lists. Application execution spaces are protected by the Card JVM **16**. Communication channels are protected with one-time session encryption keys **209**.

In other embodiments, the above-described techniques are used with a microcontroller (such as the processor **12**) may control devices (e.g., part of an automobile engine) other than an integrated circuit card. In these applications, the microcontroller provides a small platform (i.e., a central processing unit, and a memory, both of which are located on a semiconductor substrate) for storing and executing high level programming languages. Most existing devices and new designs that utilize a microcontroller could use this invention to provide the ability to program the microcontroller using a high level language, and application of this invention to such devices is specifically included.

The term application includes any program, such as Java applications, Java applets, Java aglets, Java servlets, Java comlets, Java components, and other non-Java programs that can result in class files as described below.

Class files may have a source other than Java program files. Several programming languages other than Java also have compilers or assemblers for generating class files from their respective source files. For example, the programming language Eiffel can be used to generate class files using Pirmin Kalberer's "J-Eiffel", an Eiffel compiler with JVM byte code generation (web site: <http://www.spin.ch-kalberer/jive/index.htm>). An Ada 95 to Java byte code translator is described in the following reference (incorporated herein by reference): Taft, S. Tucker, "Programming the Internet in Ada 95", proceedings of Ada Europe '96, 1996. Jasmin is a Java byte code assembler that can be used to generate class files, as described in the following reference (incorporated herein by reference): Meyer, Jon and Troy Downing, "Java Virtual Machine", O'Reilly, 1997. Regardless of the source of the class files, the above description applies to languages other than Java to generate codes to be interpreted.

FIG. **21** shows an integrated circuit card, or smart card, which includes a microcontroller **210** that is mounted to a plastic card **212**. The plastic card **212** has approximately the same form factor as a typical credit card. The communicator **12a** can use a contact pad **214** to establish a communication channel, or the communicator **12a** can use a wireless communication system.

In other embodiments, a microcontroller **210** is mounted into a mobile or fixed telephone **220**, effectively adding smart card capabilities to the telephone, as shown in FIG. **22**. In these embodiments, the microcontroller **210** is mounted

US 7,117,485 B2

19

on a module (such as a Subscriber Identity Module (SIM)), for insertion and removal from the telephone 220.

In other embodiments, a microcontroller 210 is added to a key ring 230 as shown in FIG. 23. This can be used to secure access to an automobile that is equipped to recognize the identity associated with the microcontroller 210 on the key ring 230.

Jewelry such as a watch or ring 240 can also house a microcontroller 210 in an ergonomic manner, as shown in FIG. 24. Such embodiments typically use a wireless communication system for establishing a communication channel, and are a convenient way to implement access control with a minimum of hassle to the user.

FIG. 25 illustrates a microcontroller 210 mounted in an electrical subsystem 252 of an automobile 254. In this embodiment, the microcontroller is used for a variety of purposes, such as to controlling access to the automobile, (e.g. checking identity or sobriety before enabling the ignition system of the automobile), paying tolls via wireless communication, or interfacing with a global positioning system (GPS) to track the location of the automobile, to name a few.

While specific embodiments of the present invention have been described, various modifications and substitutions will become apparent to one skilled in the art by this disclosure. Such modifications and substitutions are within the scope of the present invention, and are intended to be covered by the appended claims.

What is claimed is:

1. A microcontroller comprising:
 - a memory storing;
 - a derivative application derived from an application having a class file format wherein the application is derived from an application having a class file format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, and
 - an interpreter configured to interpret derivative applications in the converted form and derived from applications having a class file format; and
 - a processor coupled to the memory, the processor configured to use the interpreter to interpret the derivative application for execution.
2. The microcontroller of claim 1, further comprising: a communicator configured to communicate with a terminal.
3. The microcontroller of claim 2, wherein the terminal has a card reader and the communicator comprises a contact for communicating with the card reader.
4. The microcontroller of claim 3, wherein the terminal has a wireless communicator and a wireless transceiver for communicating with the wireless communication device.
5. The microcontroller of claim 3, wherein the terminal has a wireless communication device and the communicator comprises a wireless transmitter for communicating with the wireless communication device.
6. The microcontroller of claim 1, wherein the class file format comprises a Java class file format.
7. A microcontroller having a set of resource constraints and comprising:
 - a memory, and
 - an interpreter loaded in memory and operable within the set of resource constraints, the microcontroller having;
 - at least one application loaded in the memory to be interpreted by the interpreter, wherein the at least one application is generated by a programming environment comprising:

20

a) a compiler for compiling application source programs written in high level language source code form into a compiled form, and

b) a converter for post processing the compiled form into a minimized form suitable for interpretation within the set of resource constraints by the interpreter.

8. The microcontroller of claim 7, wherein the compiled form includes attributes, and the converter comprises a means for including attributes required by the interpreter while not including the attributes not required by the interpreter.

9. The microcontroller of claim 7 wherein the compiled form is in a standard Java class file format and the converter accepts as input the compiled form in the standard Java class file format and produces output in a form suitable for interpretation by the interpreter.

10. The microcontroller of claim 7 wherein the compiled form includes associating an identifying string for objects, classes, fields, or methods, and the converter comprises a means for mapping such strings to unique identifiers.

11. The microcontroller of claim 10, wherein each unique identifier is an integer.

12. The microcontroller of claim 10 wherein the mapping of strings to unique identifiers is stored in a string to identifier map file.

13. The microcontroller of claim 7 where in the high level language supports a first set of features and a first set of data types and the interpreter supports a subset of the first set of features and a subset of the first set of data types, and wherein the converter verifies that the compiled form only contains features in the subset of the first set of features and only contains data types in the subset of the first set of data types.

14. The microcontroller of claim 10 wherein the compiled form is in a byte code format and the converter comprises means for translating from the byte codes in the compiled form to byte codes in a format suitable for interpretation by the interpreter by:

- using at least one step in a process including the steps:
 - a) recording all jumps and their destinations in the original byte codes;
 - b) converting specific byte codes into equivalent generic byte codes or vice-versa;
 - c) modifying byte code operands from references using identifying strings to references using unique identifiers; and
 - d) renumbering byte codes in the compiled form to equivalent byte codes in the format suitable for interpretation; and
- relinking jumps for which destination address is effected by conversion step a), b), c), or d).

15. The microcontroller of claim 7 wherein the application program is compiled into a compiled form for which resources required to execute or interpret the compiled form exceed those available on the microcontroller.

16. The microcontroller of claim 7 wherein the compiled form is designed for portability on different computer platforms.

17. The microcontroller of claim 7 wherein the interpreter is further configured to determine, during an interpretation of an application, whether the application meets a security criteria selected from a set of rules containing at least one rule selected from the set:

- not allowing the application access to unauthorized portions of memory,
- not allowing the application access to unauthorized microcontroller resources,

US 7,117,485 B2

21

wherein the application is composed of byte codes and checking a plurality of byte codes at least once prior to execution to verify that execution of the byte codes does not violate a security constraint.

18. The microcontroller of claim 7 wherein at least one application program is generated by a process including the steps of:

prior to loading the application verifying that the application does not violate any security constraints; and loading the application in a secure manner.

19. The microcontroller of claim 18 wherein the step of loading in a secure manner comprises the step of:

verifying that the loading identity has permission to load applications onto the microcontroller.

20. The microcontroller of claim 18 wherein the step of loading in a secure manner comprises the step of:

encrypting the application to be loaded using a loading key.

21. A method of programming a microcontroller having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of:

inputting an application program in a first programming language;

compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code; wherein the second intermediate code is interpretable within the set of resource constraints by at least one second intermediate code virtual machine; and

loading the second intermediate code into the memory of the microcontroller.

22. The method of programming a microcontroller of claim 21 wherein the step of converting further comprises: associating an identifying string for objects, classes, fields, or methods; and mapping such strings to unique identifiers.

23. The method of claim 22 wherein the step of mapping comprises the step of mapping strings to integers.

24. The method of claim 21 wherein the step of converting comprises at least one of the steps of:

a) recording all jumps and their destinations in the original byte codes;

b) converting specific byte codes into equivalent generic byte codes or vice-versa;

c) modifying byte code operands from references using identifying strings to references using unique identifiers;

d) renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

e) relinking jumps for which destination address is effected by conversion step a), b), c), or d).

25. The method of claim 21 wherein the step of loading the second intermediate code into the memory of the microcontroller further comprises checking the second intermediate code prior to loading the second intermediate code to verify that the second intermediate code meets a predefined integrity check and that loading is performed according to a security protocol.

26. The method of claim 25 wherein the security protocol requires that a particular identity must be validated to permit loading prior to the loading of the second intermediate code.

22

27. The method of claim 25 further characterized by providing a decryption key and wherein the security protocol requires that the second intermediate code is encrypted using a loading key corresponding to the decryption key.

28. A microcontroller operable to execute derivative programs which are derivatives of programs written in an interpretable programming language having a memory and an interpreter, the microcontroller comprising:

(a) the microcontroller operating within a set of resource constraints including the memory being of insufficient size to permit interpretation of programs written in the interpretable programming language; and

(b) the memory containing an interpreter operable to interpret the derivative programs written in the derivative of the interpretable language wherein a derivative of a program written in the interpretable programming language is derived from the compiled version of a program written in the interpretable programming language by applying a conversion of the compiled version including applying at least one rule selected from a set of rules including:

(1) mapping strings to identifiers;

(2) performing security checks prior to or during interpretation;

(3) performing structural checks prior to or during interpretation; and

(4) performing semantic checks prior to or during interpretation.

29. The microcontroller of claim 28 wherein the derivative programs are class files or derivatives of class files.

30. The microcontroller of claim 28 further comprising: the memory containing less than 1 megabyte of storage.

31. The microcontroller of claim 28 wherein the security checks the microcontroller is further comprising:

(c) logic to receive a request from a requester to access one of a plurality of derivative programs;

(d) after receipt of the request, determine whether the one of a plurality of derivative programs compiles with a predetermined set of rules; and

(e) based on the determination, selectively grant access to the requester to the one of the plurality of applications.

32. The microcontroller of claim 31, wherein the predetermined rules are enforced by the interpreter while the derivative program is being interpreted by determining whether the derivative program has access rights to a particular part of memory the derivative program is attempting to access.

33. The microcontroller of claim 28 further wherein the microcontroller is configured to perform at least one security check selected from the set having the members:

(a) enforcing predetermined security rules while the derivative program is being interpreted, thereby preventing the derivative program from accessing unauthorized portions of memory or other unauthorized microcontroller resources,

(b) the interpreter being configured to check each byte-code at least once prior to execution to determine that the bytecode can be executed in accordance with pre-execution and post-execution checks, and

(c) the derivative program is checked prior to being loaded into the microcontroller to verify the integrity of the derivative program and loading is performed according to a security protocol.

34. The microcontroller of claim 33 wherein the security protocol requires that a particular identity must be validated to permit loading a derivative program onto a card.

US 7,117,485 B2

23

35. The microcontroller of claim 33 further comprising a decryption key wherein the security protocol requires that a derivative program to be loaded is encrypted using a loading key corresponding to the decryption key.

36. The microcontroller of claim 28 wherein the microcontroller is configured to provide cryptographic services selected from the set including encryption, decryption, signing, signature verification, mutual authentication, transport keys, and session keys.

37. The microcontroller of claim 28 further comprising a file system and wherein the microcontroller is configured to provide secure access to the file system through a means selected from the set including:

- (a) the microcontroller having access control lists for authorizing reading from a file, writing to a file, or deletion of a file,
- (b) the microcontroller enforcing key validation to establish the authorized access to a file, and
- (c) the microcontroller verifying card holder identity to establish the authorized access to a file.

38. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

- an application derived from a program written in a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including modifying byte code operands from references using identifying strings to references using unique identifiers; and
- an interpreter operable to interpret such a derivative application in the converted form and derived from a program written in a high level programming language format; and

a processor coupled to the memory, the processor configured to use the interpreter to interpret the application for execution and to use the communicator to communicate with the terminal.

39. The integrated circuit card of claim 38 wherein the converting step further comprises:

- recording all jumps and their destinations in the original byte codes;
- converting specific byte codes into equivalent generic byte codes or vice-versa; and

renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation.

40. A method for use with an integrated circuit card and a terminal, comprising:

- storing an interpreter operable to interpret programs derived from programs written in a high level programming language and an application derived from a program written in a high level programming language format in a memory of the integrated circuit card wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including modifying byte code operands from references using identifying strings to references using unique identifiers; and

using a processor of the integrated circuit card to use the interpreter to interpret the application for execution; and

24

using a communicator of the card when communicating between the processor and the terminal.

41. The method of claim 40 wherein the converting step further comprises:

- recording all jumps and their destinations in the original byte codes;
- converting specific byte codes into equivalent generic byte codes or vice-versa; and

renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation.

42. An integrated circuit card for use with a terminal, comprising:

a communicator configured to communicate with the terminal;

a memory storing:

- applications, each application derived from applications having a high level programming language format, and

an interpreter operable to interpret applications derived from applications having a high level programming language format wherein the application is derived from a program written in a high level programming language format by first compiling the program into a compiled form and then converting the compiled form into a converted form, the converting step including modifying byte code operands from references using identifying strings to references using unique identifiers; and

a processor coupled to the memory, the processor configured to:

- a.) use the interpreter to interpret the applications for execution,
- b.) use the interpreter to create a firewall to isolate the applications from each other, and
- c.) use the communicator to communicate with the terminal.

43. The integrated circuit card of claim 42 wherein the interpreter is further operable to interpret applications derived using a converting step including:

- recording all jumps and their destinations in the original byte codes;
- converting specific byte codes into equivalent generic byte codes or vice-versa; and

renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation.

44. A microcontroller operable to execute derivative programs which are derivatives of programs written in an interpretable programming language having a memory and an interpreter, the microcontroller comprising:

the microcontroller operating within a set of resource constraints including the memory being of insufficient size to permit interpretation of programs written in the interpretable programming language; and

the memory containing an interpreter operable to interpret the derivative programs written in the derivative of the interpretable language wherein a derivative of a program written in the interpretable programming language is derived from a compiled form of the program written in the interpretable programming language by performing a conversion including mapping strings to identifiers.



US007818727B2

(12) **United States Patent**
Wilkinson et al.

(10) **Patent No.:** **US 7,818,727 B2**
 (45) **Date of Patent:** ***Oct. 19, 2010**

(54) **USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER**

(60) Provisional application No. 60/029,057, filed on Oct. 25, 1996.

(75) Inventors: **Timothy J. Wilkinson**, London (GB);
Scott B. Guthery, Belmont, MA (US);
Ksheerabdh Krishna, Cedar Park, TX (US);
Michael A. Montgomery, Cedar Park, TX (US)

(51) **Int. Cl.**
G06F 9/45 (2006.01)

(52) **U.S. Cl.** **717/139**

(58) **Field of Classification Search** **717/139**
 See application file for complete search history.

(73) Assignee: **Gemalto Inc.**, Austin, TX (US)

(56) **References Cited**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1016 days.

This patent is subject to a terminal disclaimer.

U.S. PATENT DOCUMENTS

6,308,317 B1 * 10/2001 Wilkinson et al. 717/139
 2005/0097550 A1 * 5/2005 Schwabe et al. 717/178
 2008/0282238 A1 * 11/2008 Meijer et al. 717/162

* cited by examiner

Primary Examiner—John Chavis

(74) *Attorney, Agent, or Firm*—Pehr B. Jansson; The Jansson Firm

(21) Appl. No.: **11/537,156**

(22) Filed: **Sep. 29, 2006**

(57) **ABSTRACT**

(65) **Prior Publication Data**


US 2008/0115117 A1 May 15, 2008

An integrated circuit card is used with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the card to communicate with the terminal.

Related U.S. Application Data

(63) Continuation of application No. 10/037,390, filed on Oct. 23, 2001, now Pat. No. 7,117,485, which is a continuation of application No. 08/957,512, filed on Oct. 24, 1997, now Pat. No. 6,308,317.

20 Claims, 23 Drawing Sheets

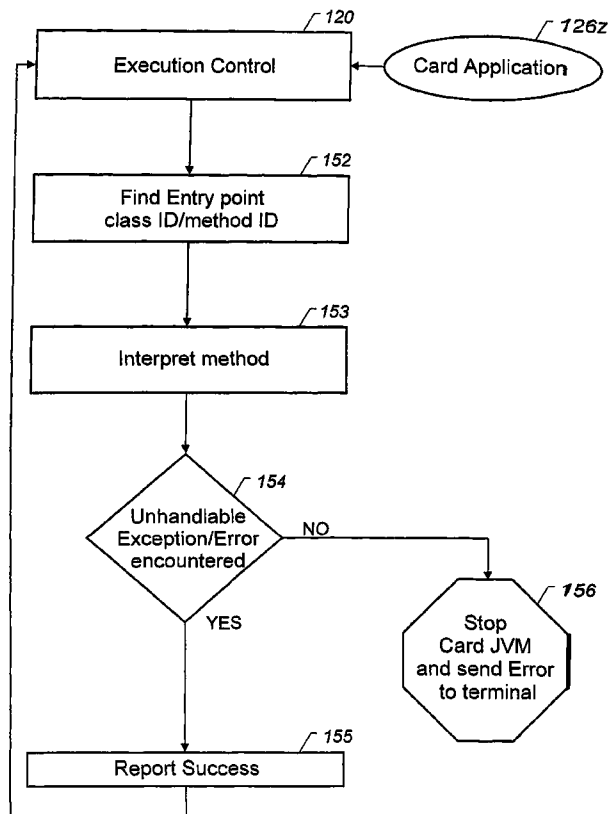

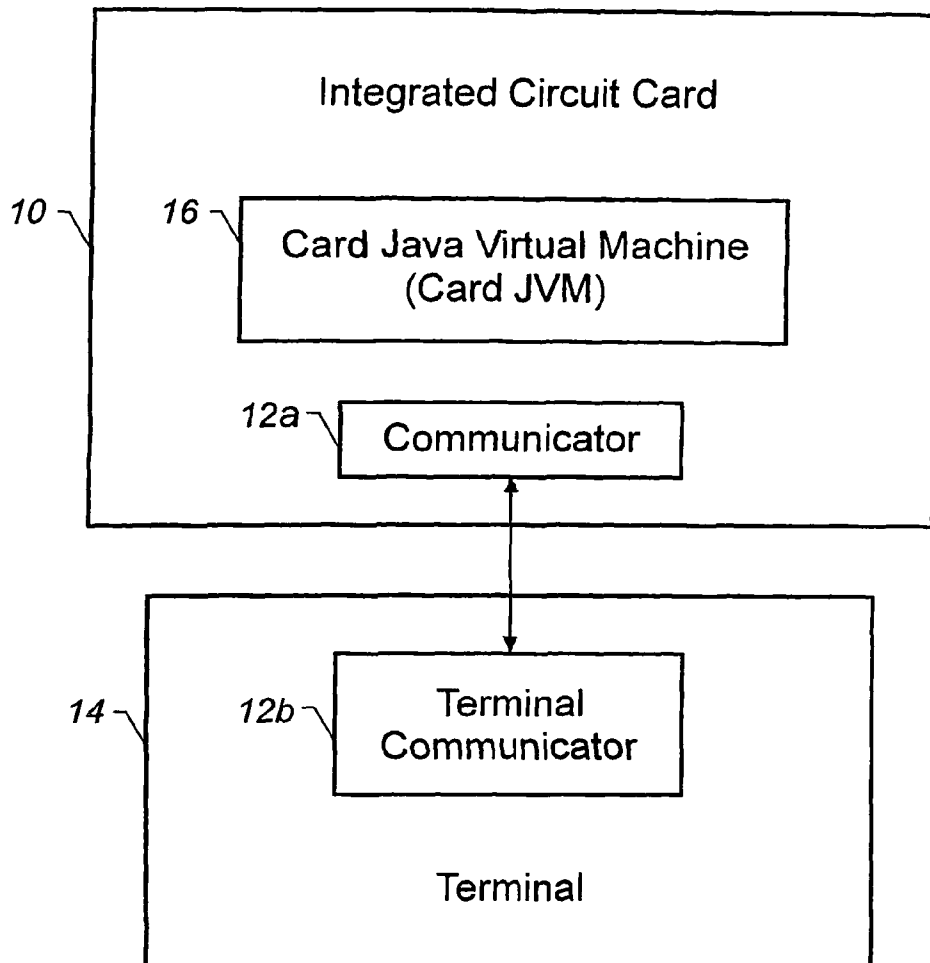


FIGURE 1

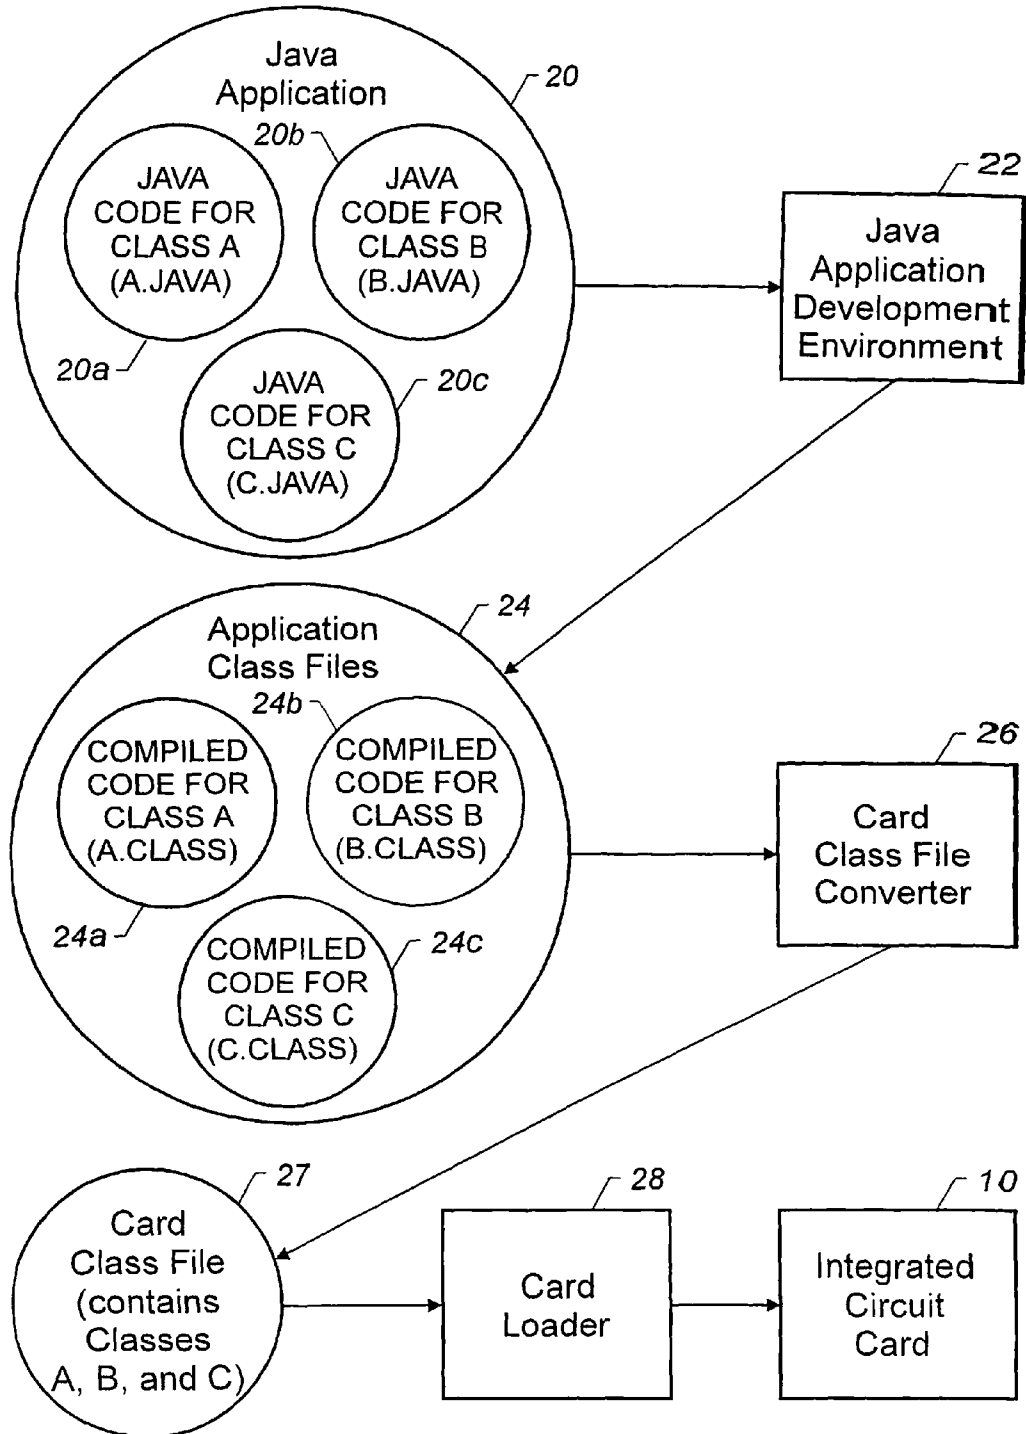


FIGURE 2

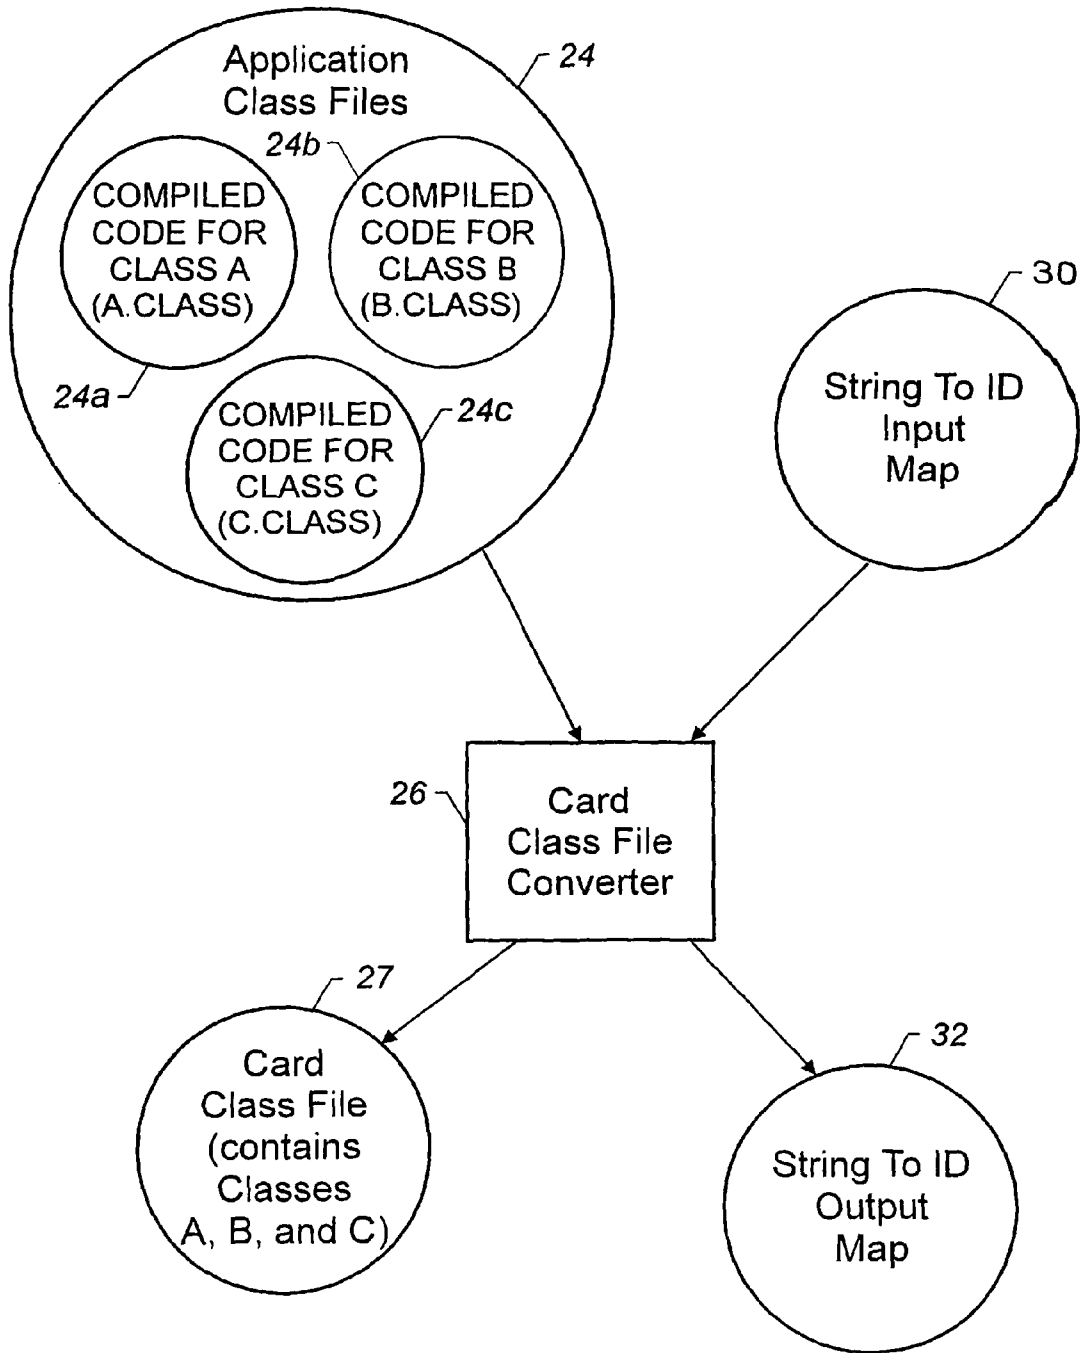


FIGURE 3

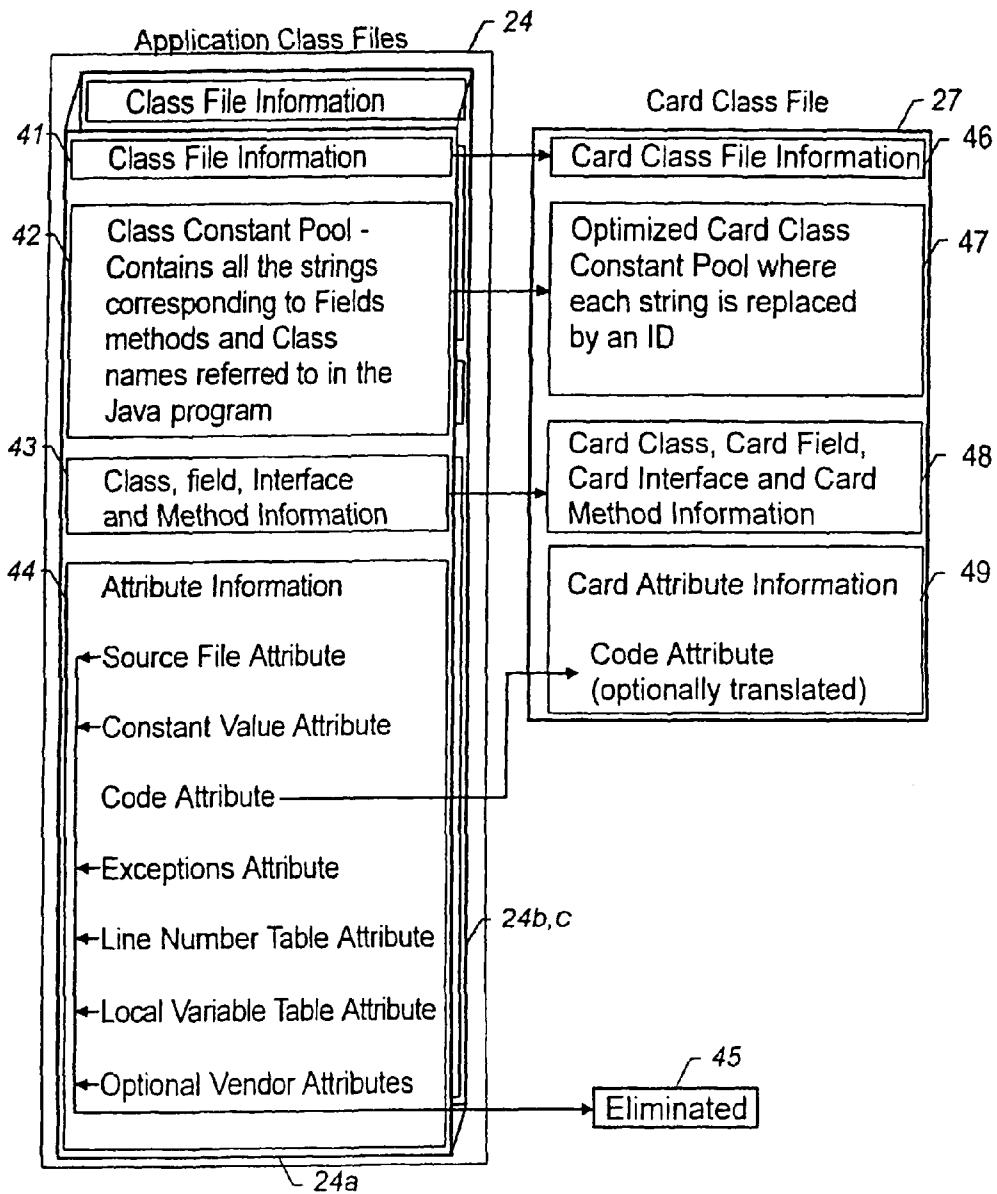


FIGURE 4

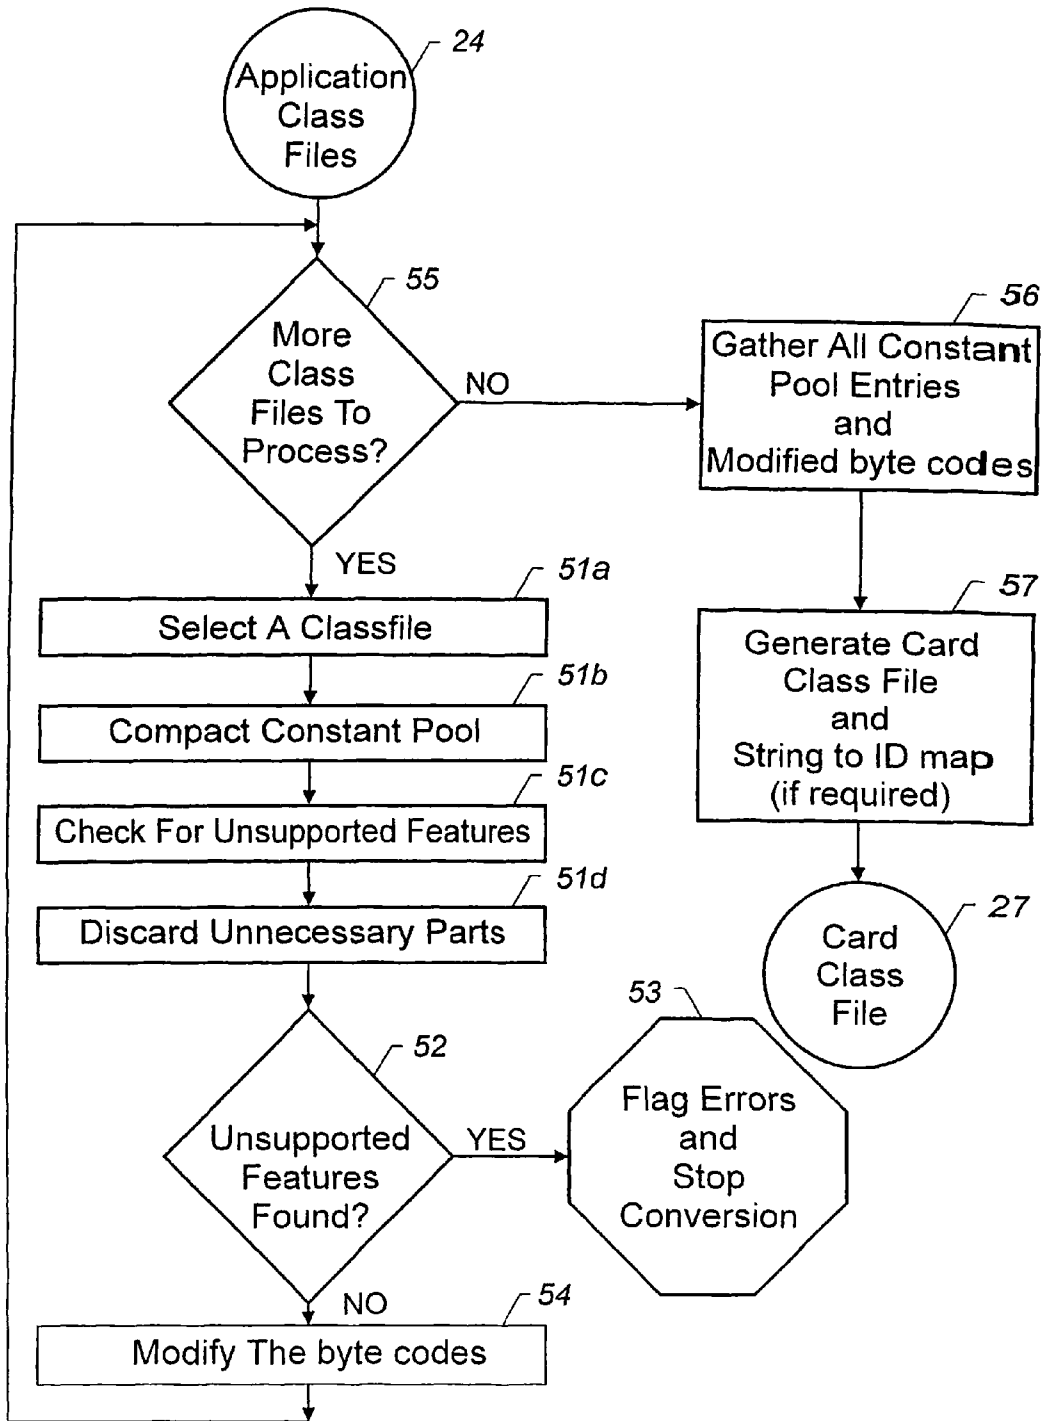


FIGURE 5

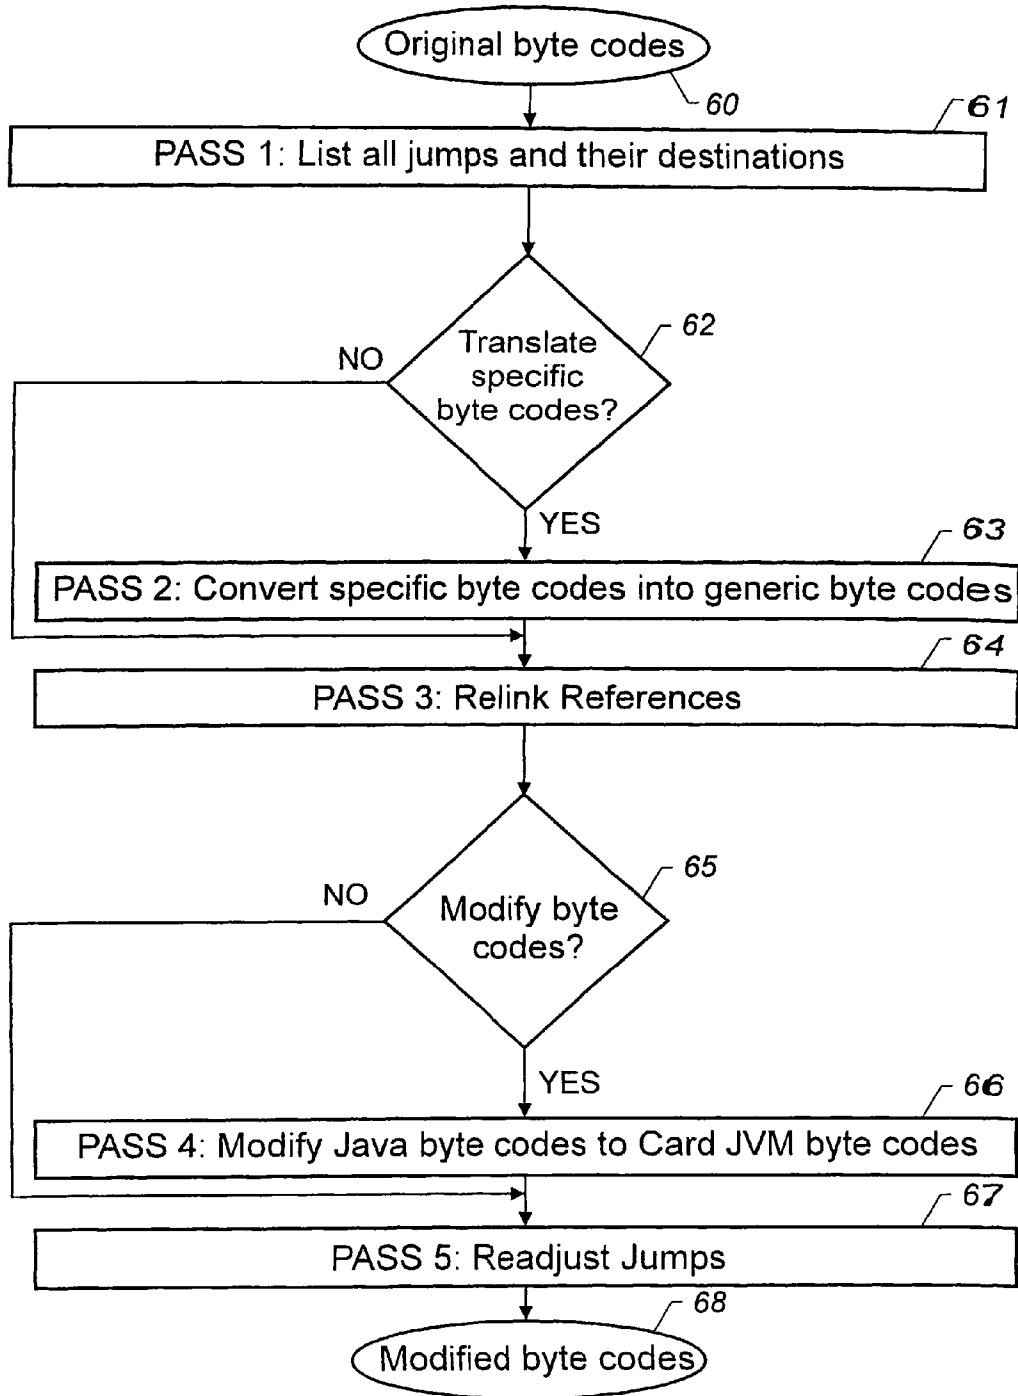


FIGURE 6

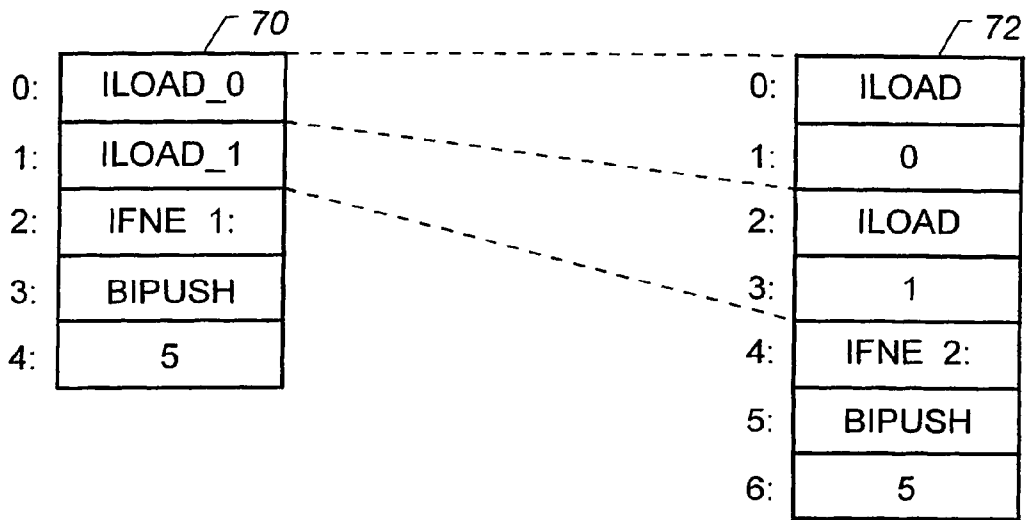


FIGURE 7

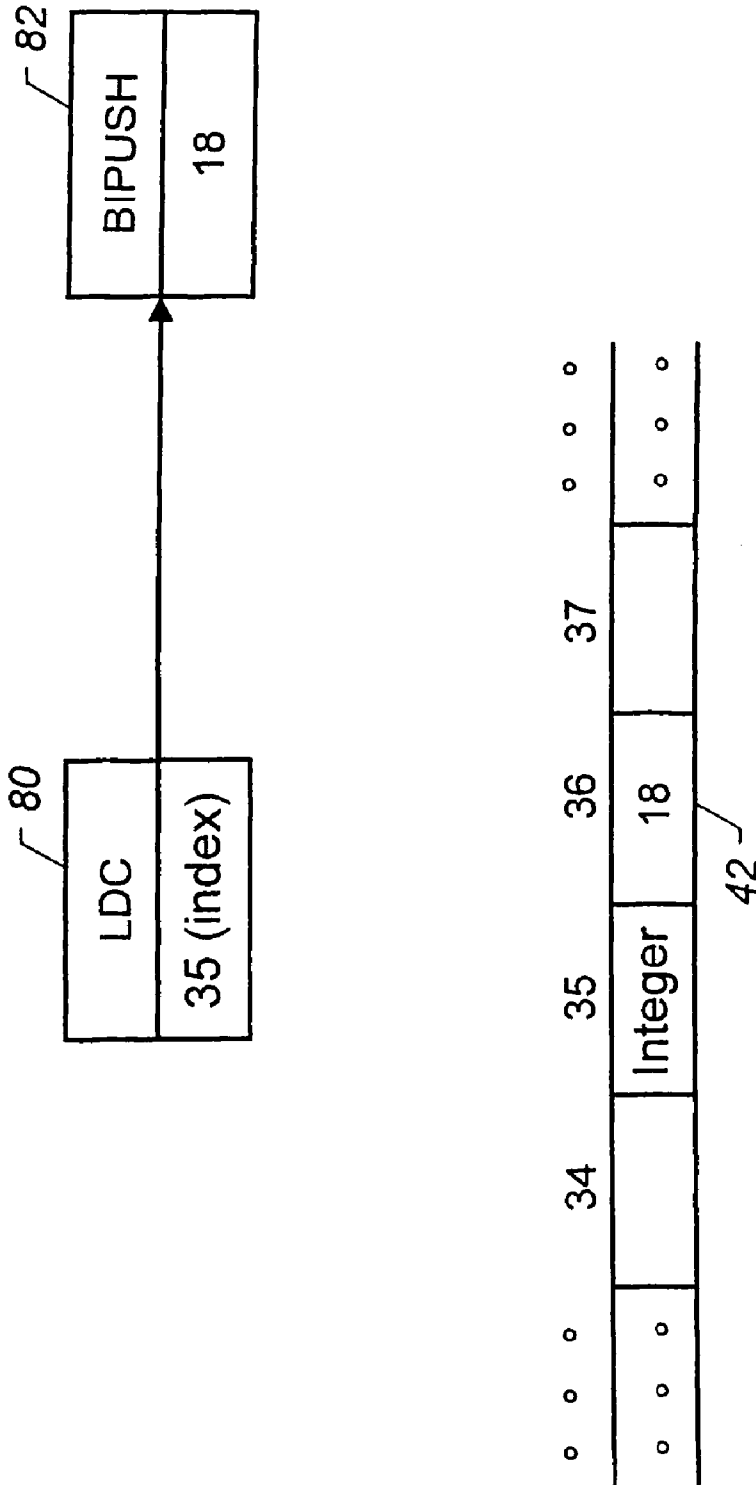


FIGURE 8

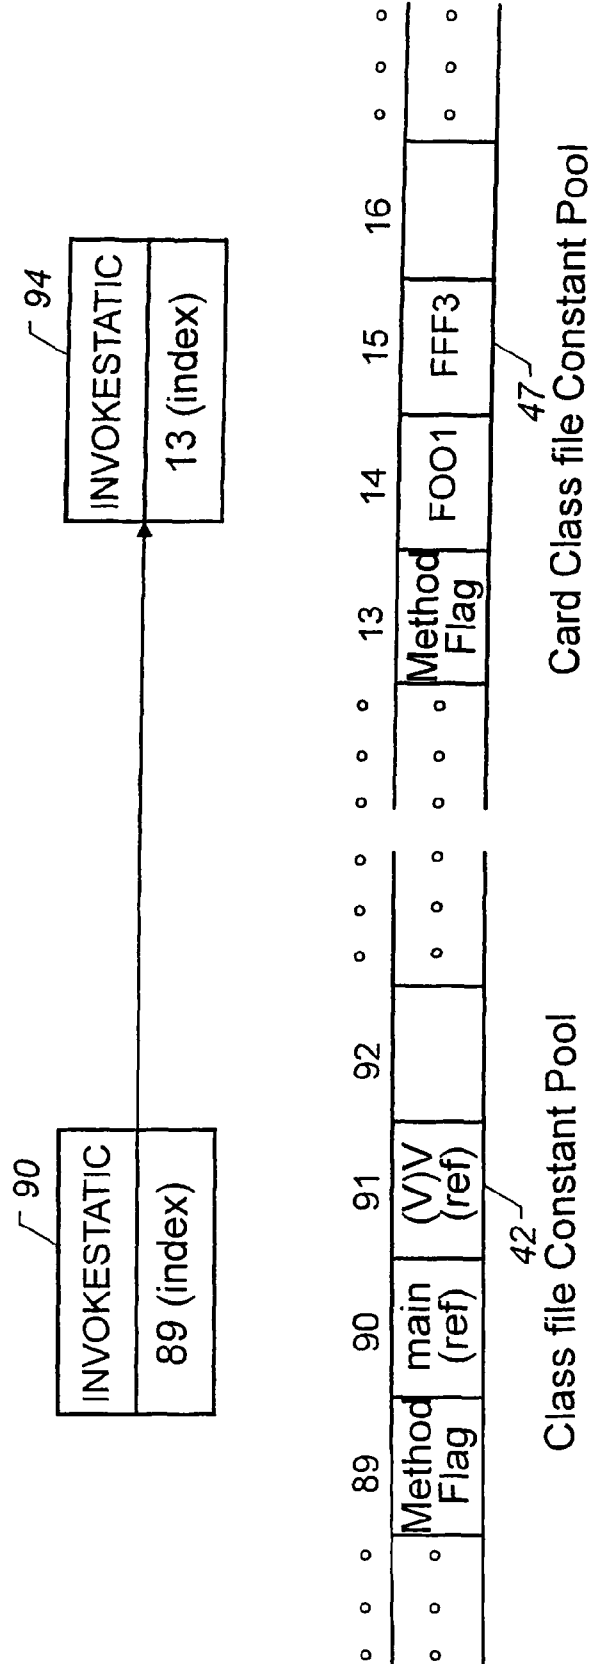


FIGURE 9

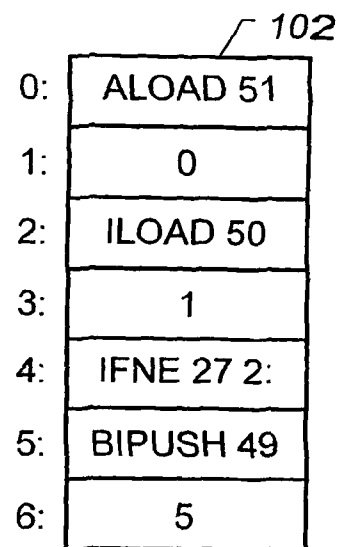
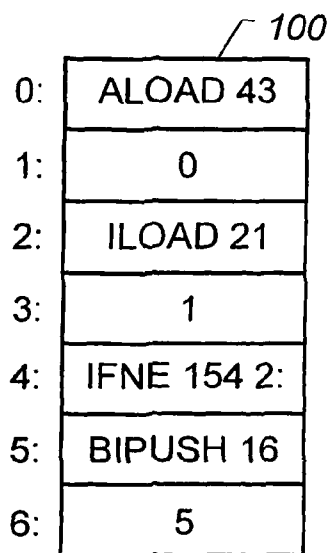


FIGURE 10

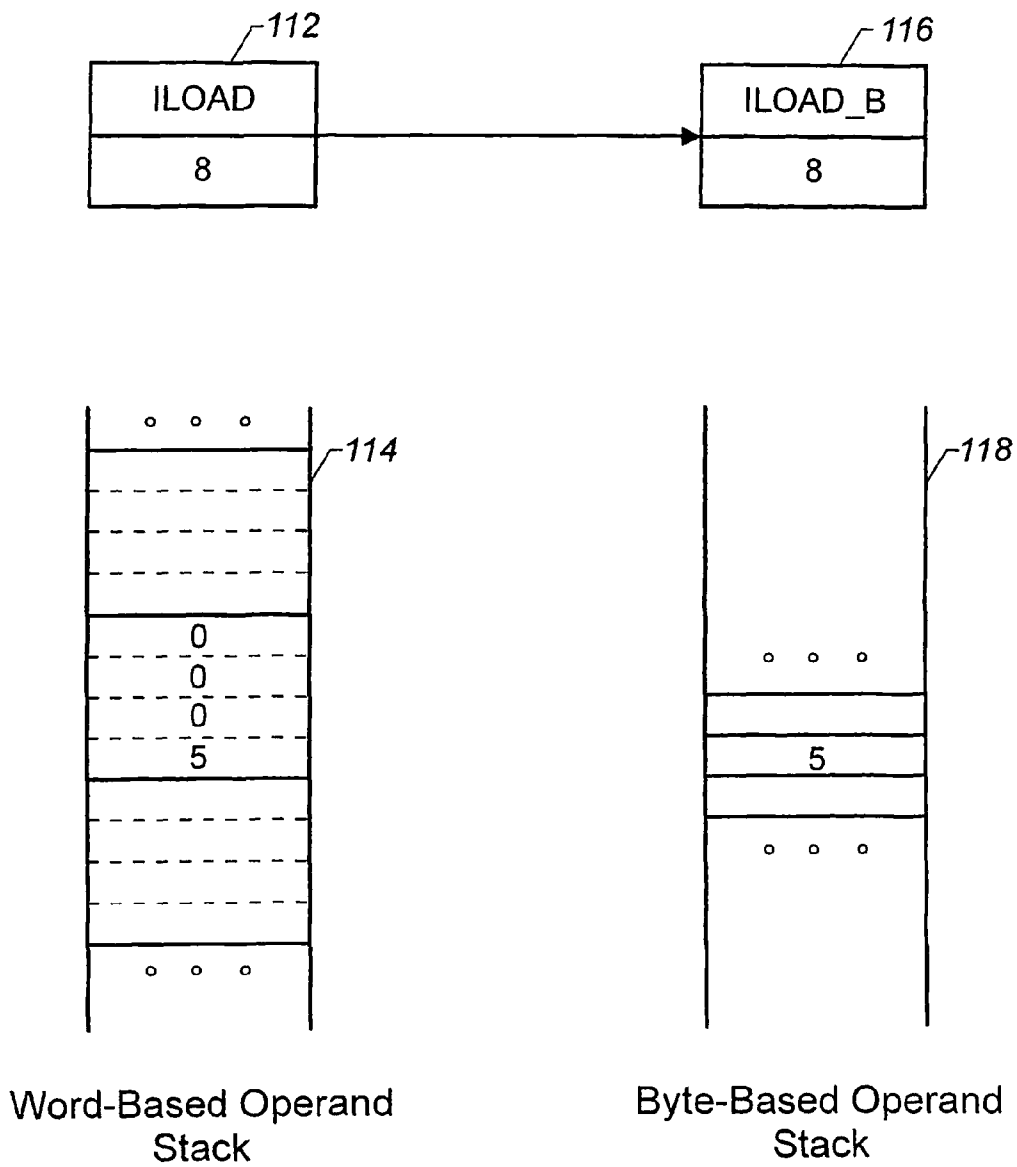


FIGURE 11

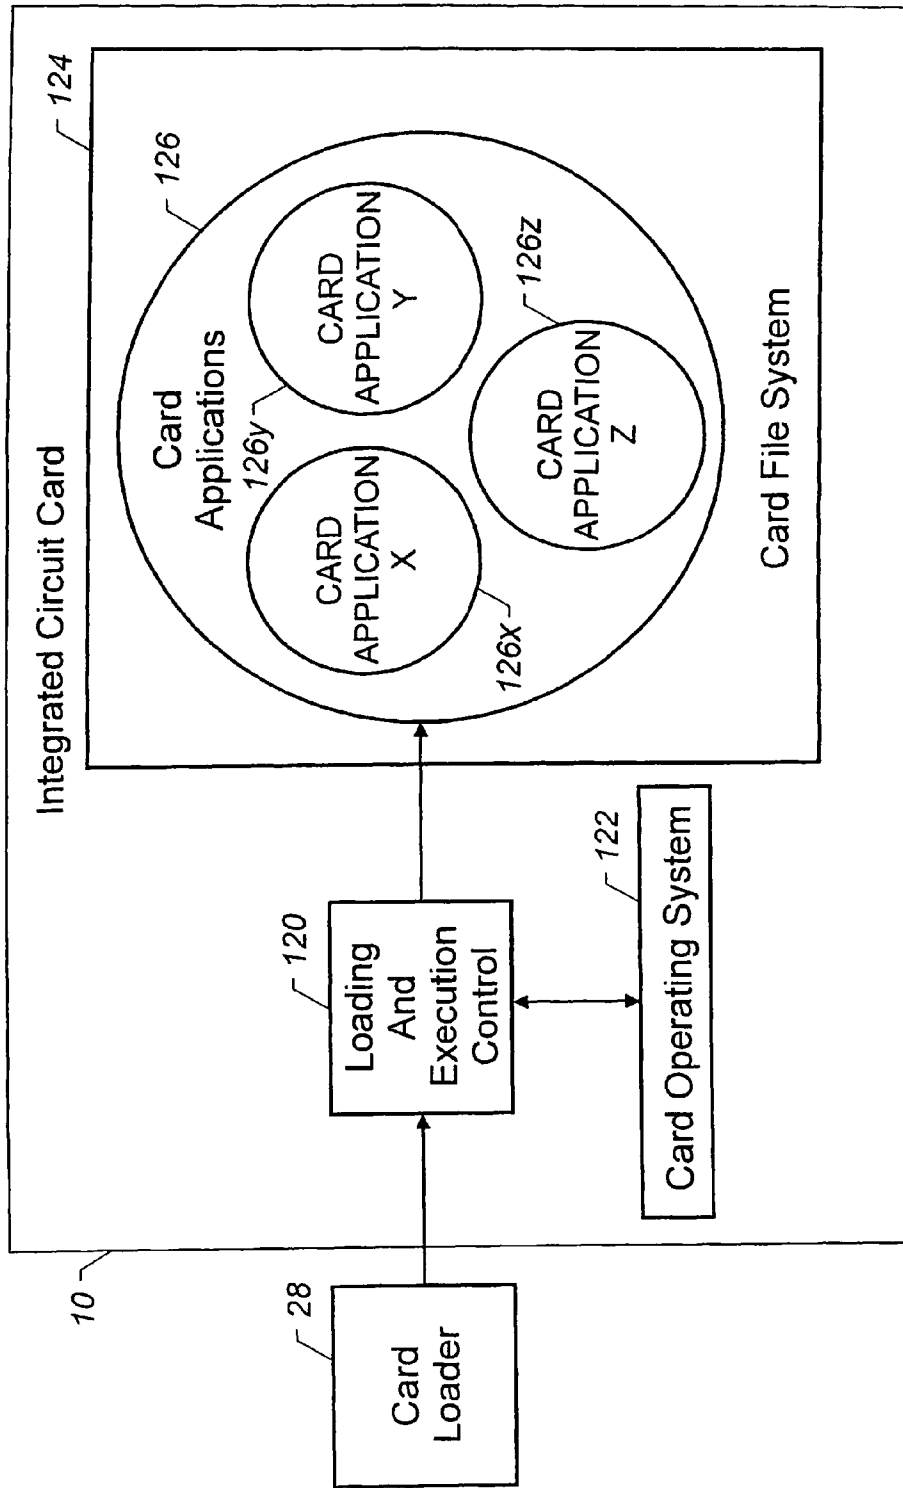


FIGURE 12

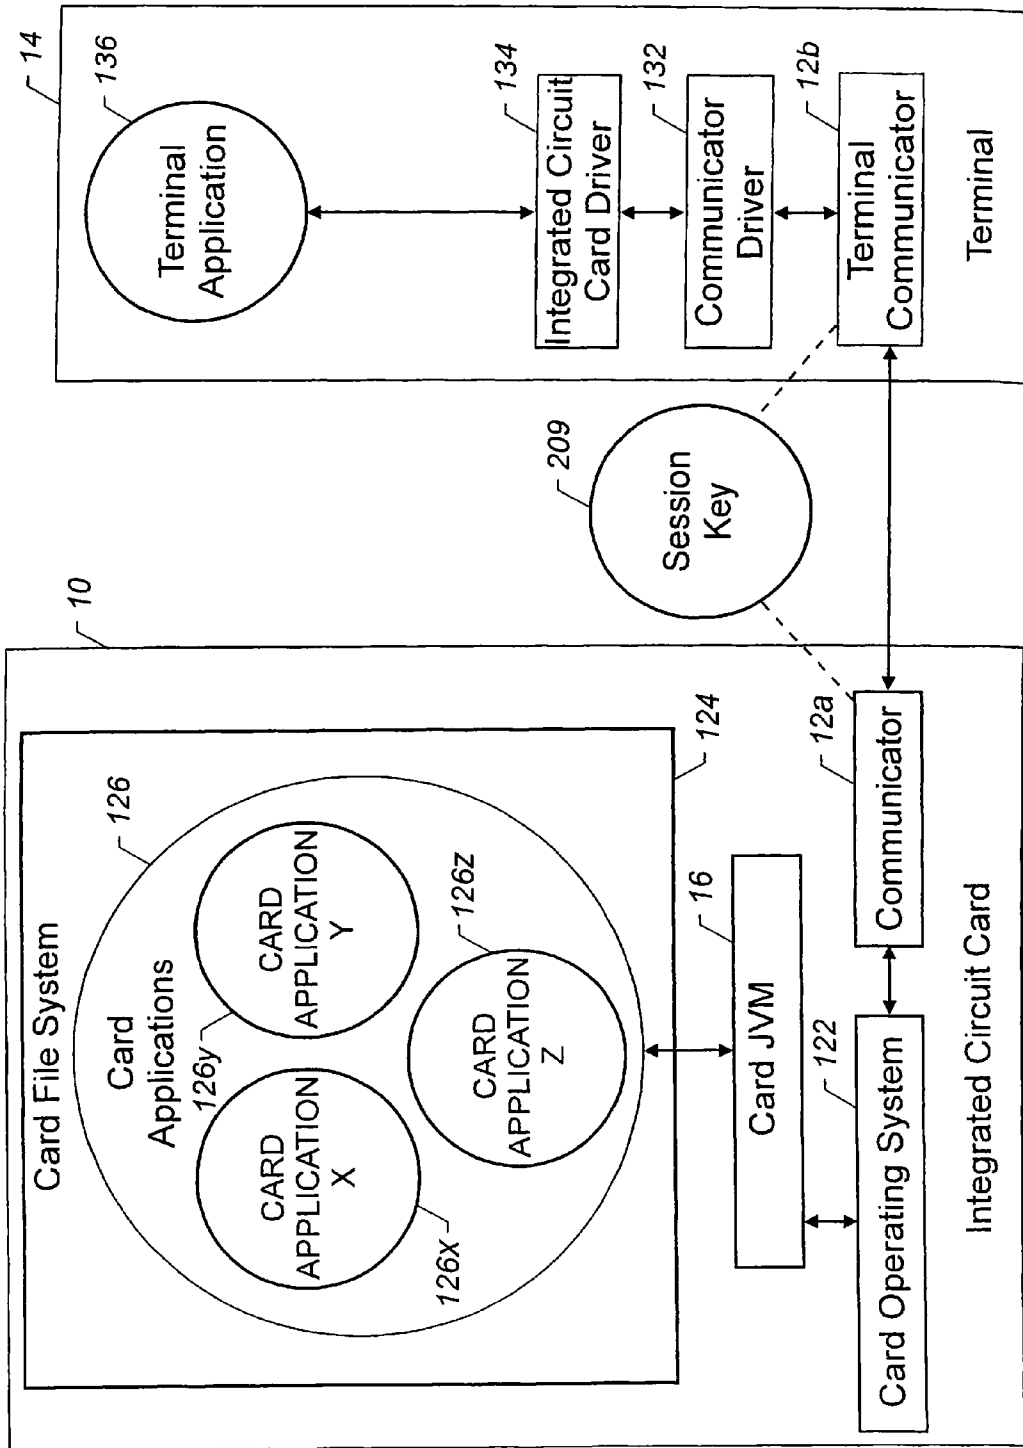


FIGURE 13

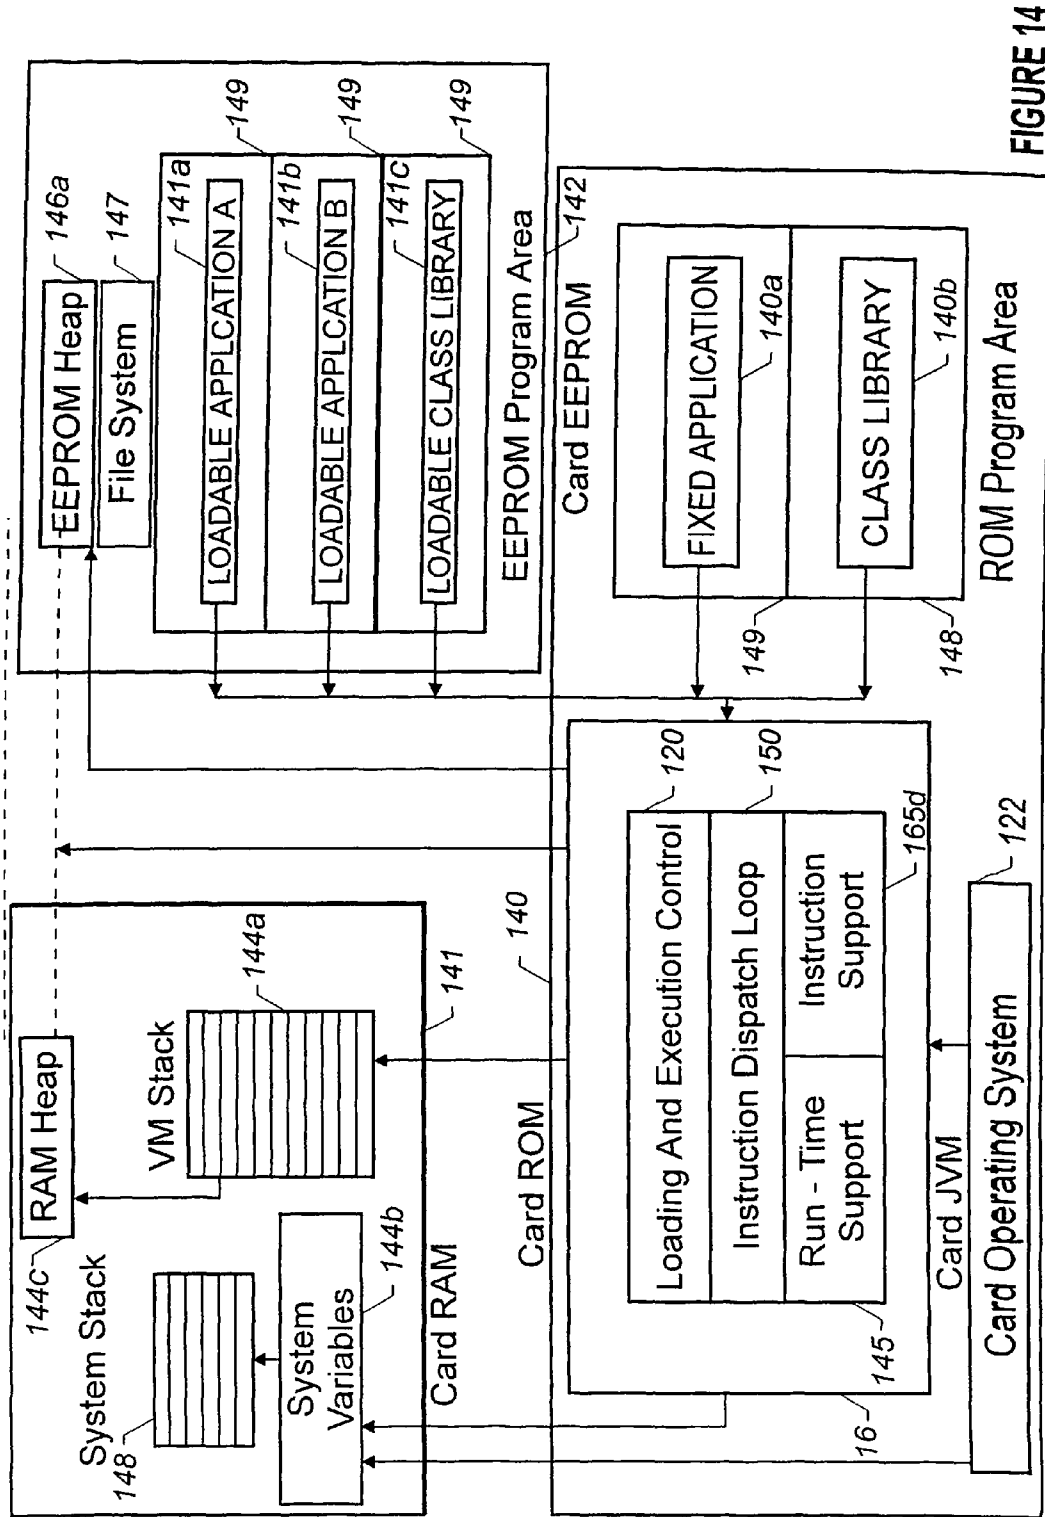


FIGURE 14

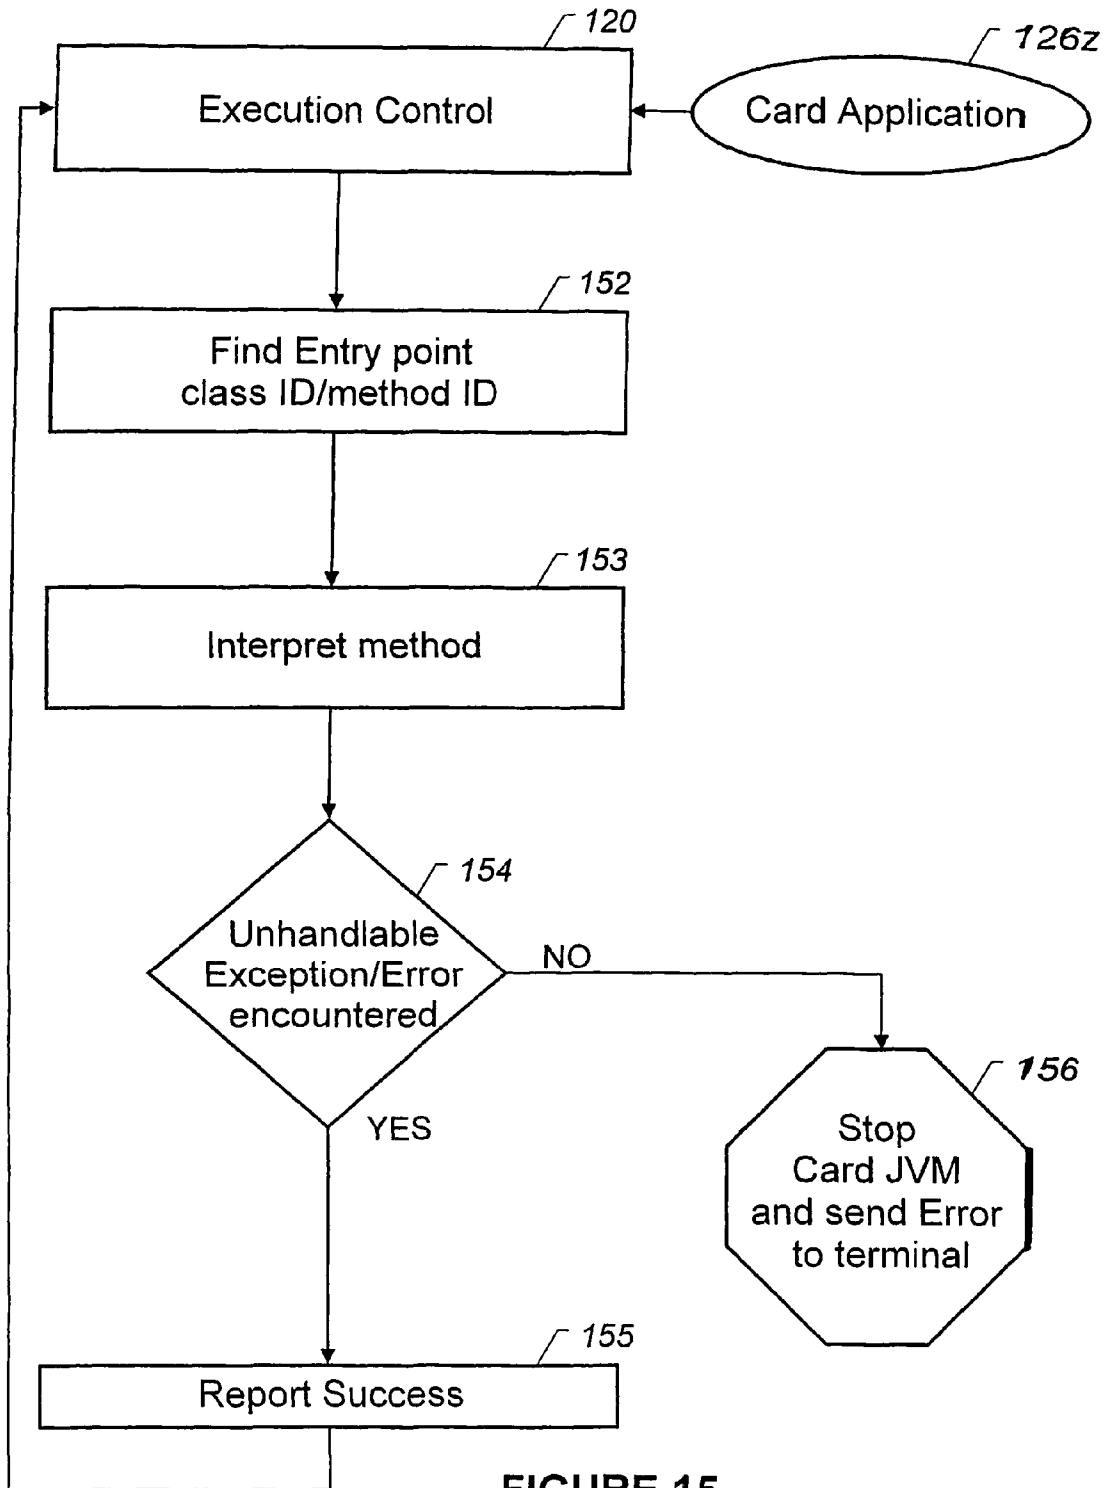


FIGURE 15

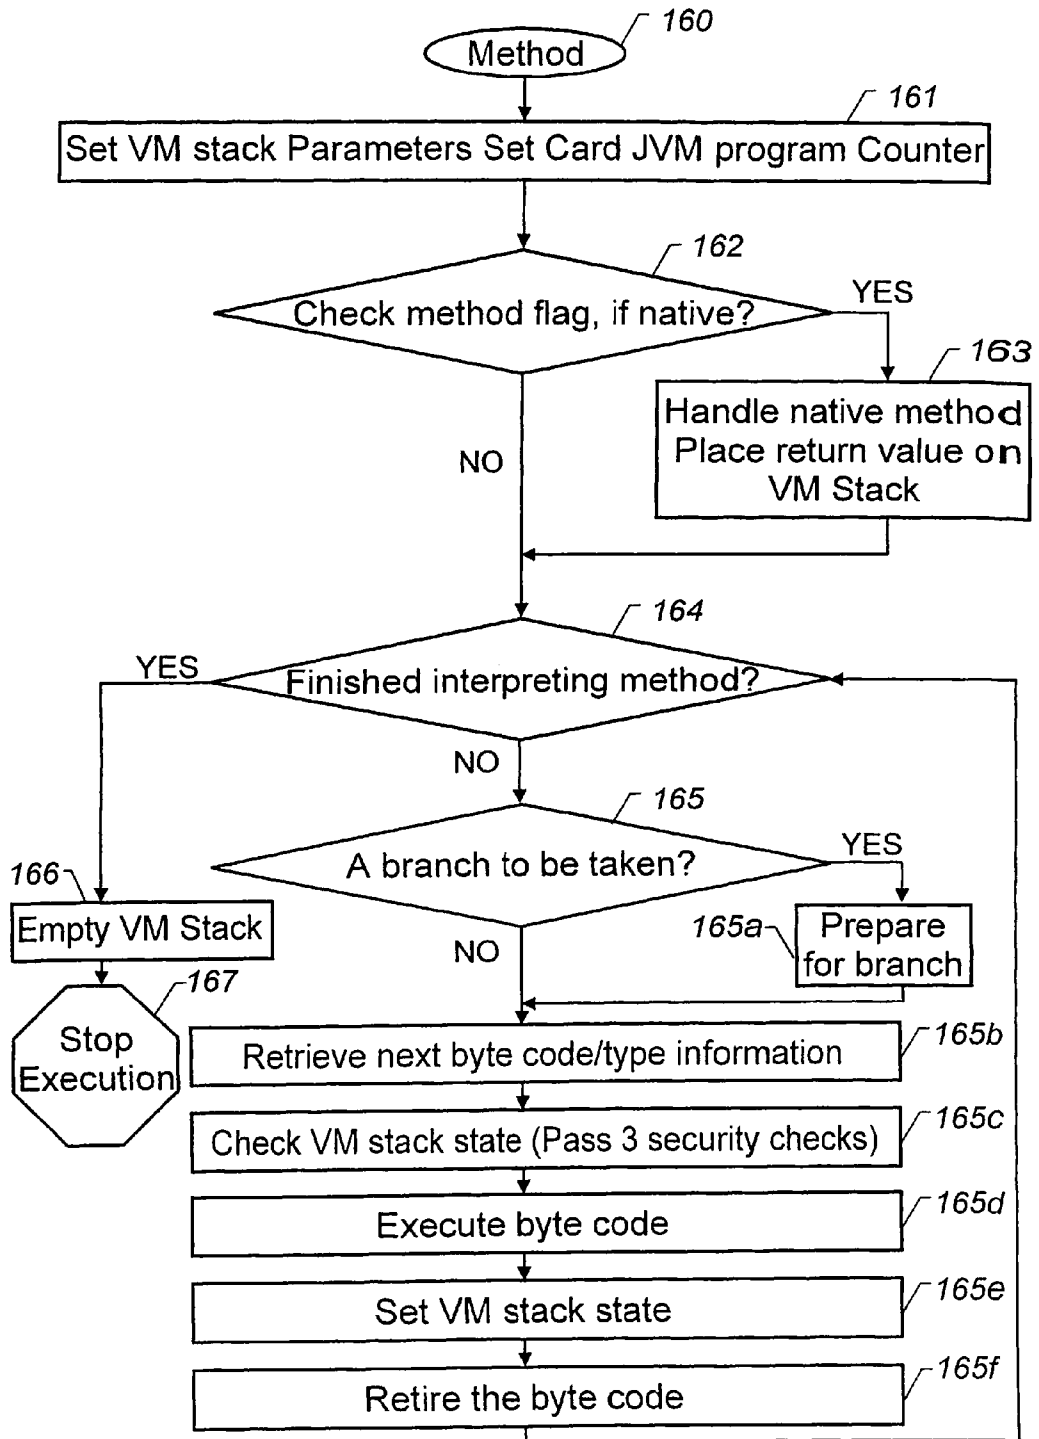


FIGURE 16

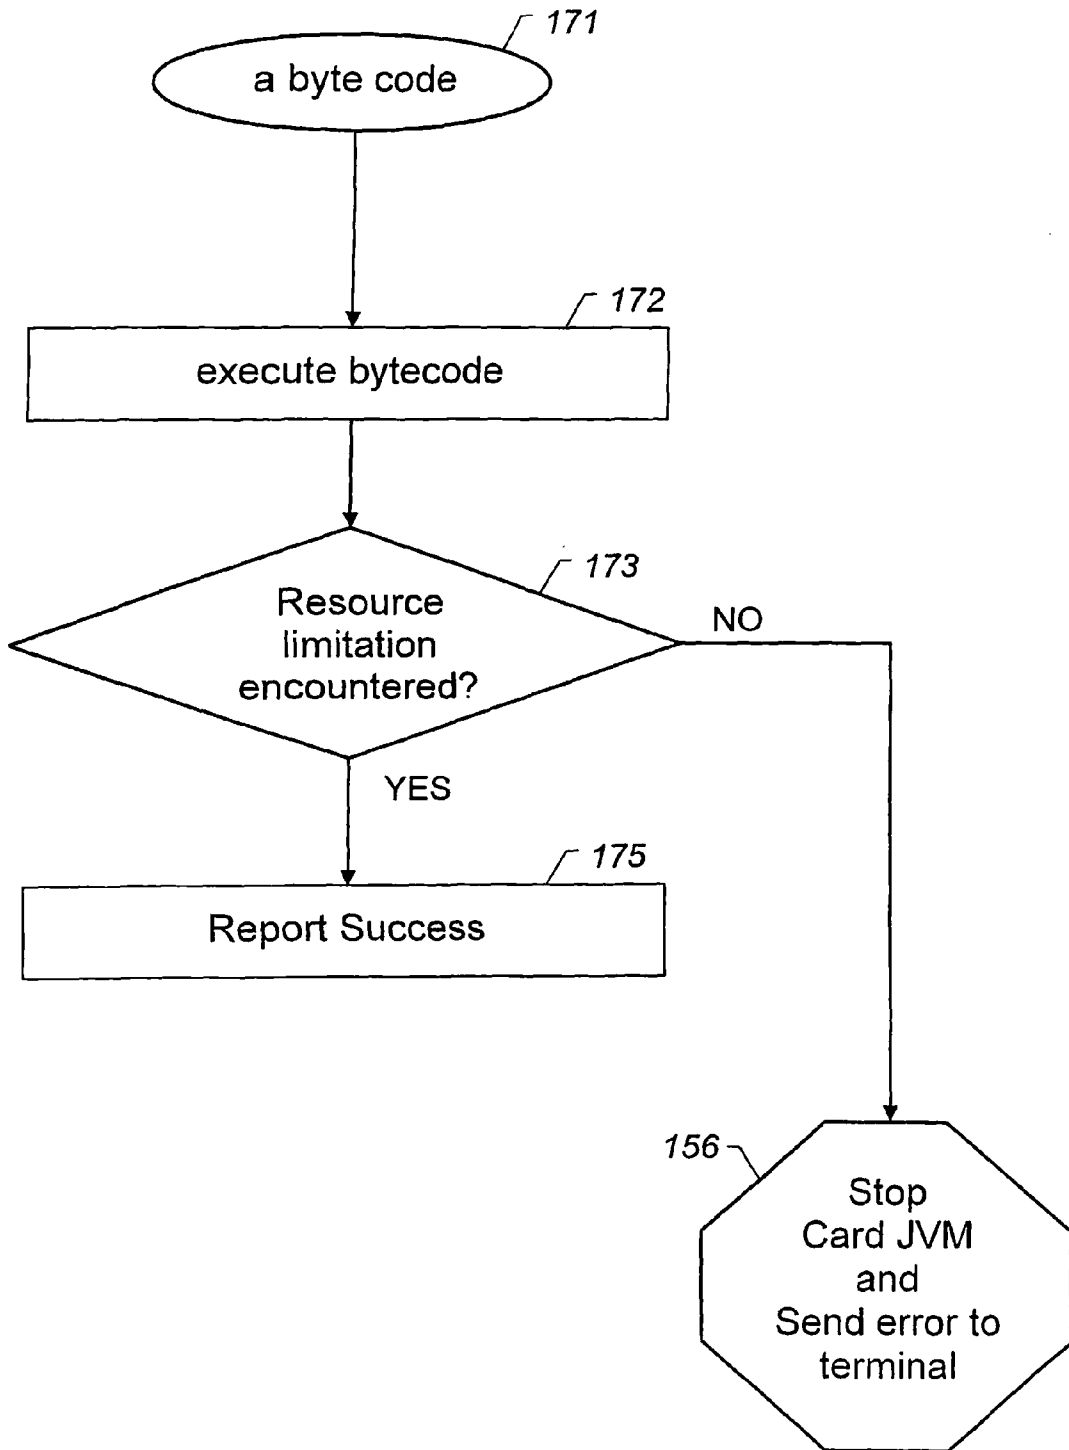


FIGURE 17

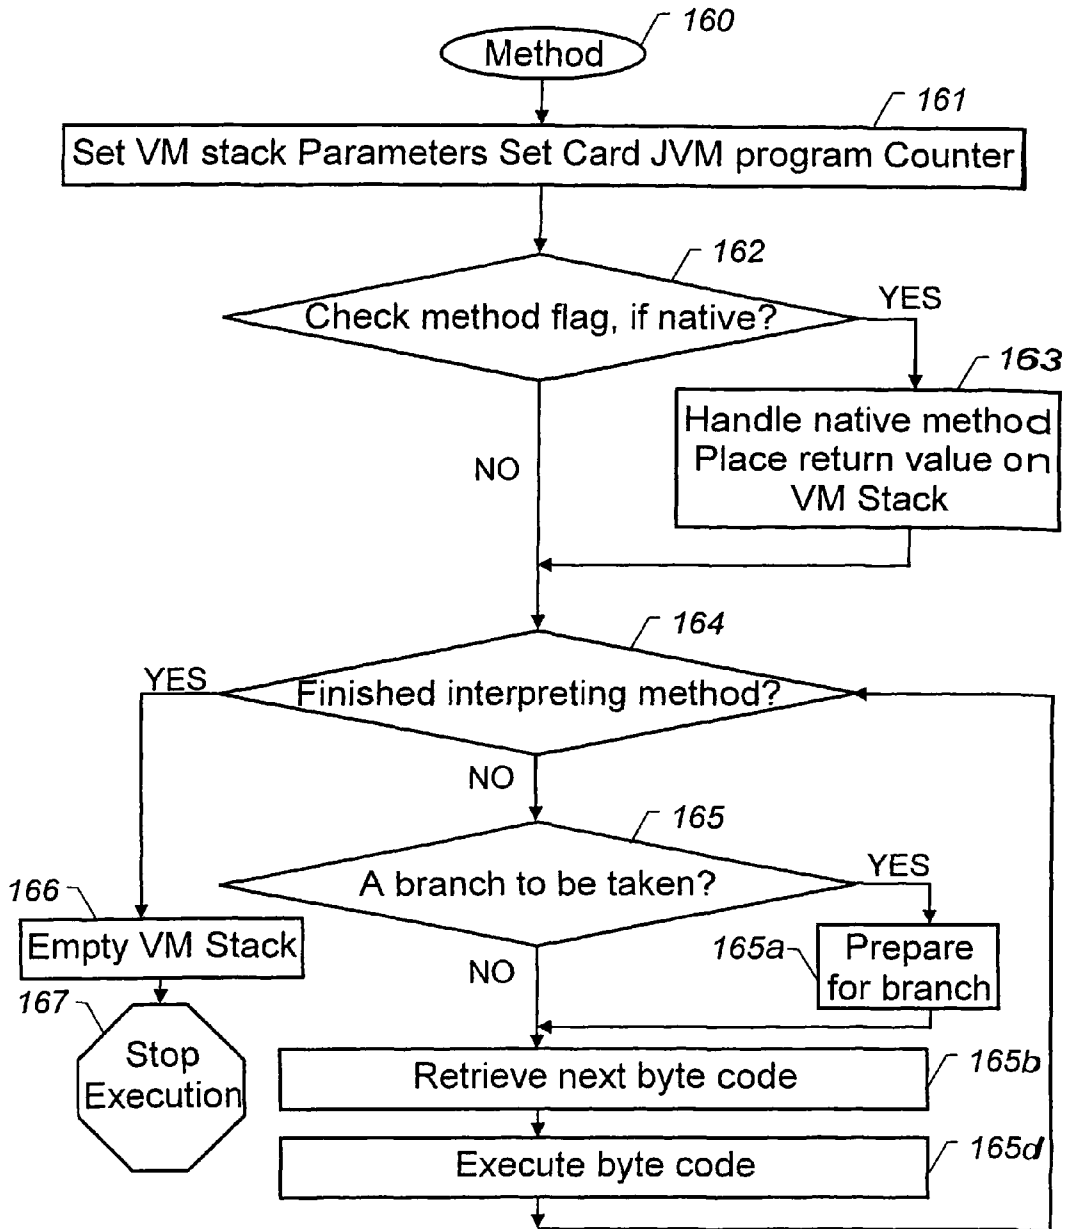


FIGURE 18

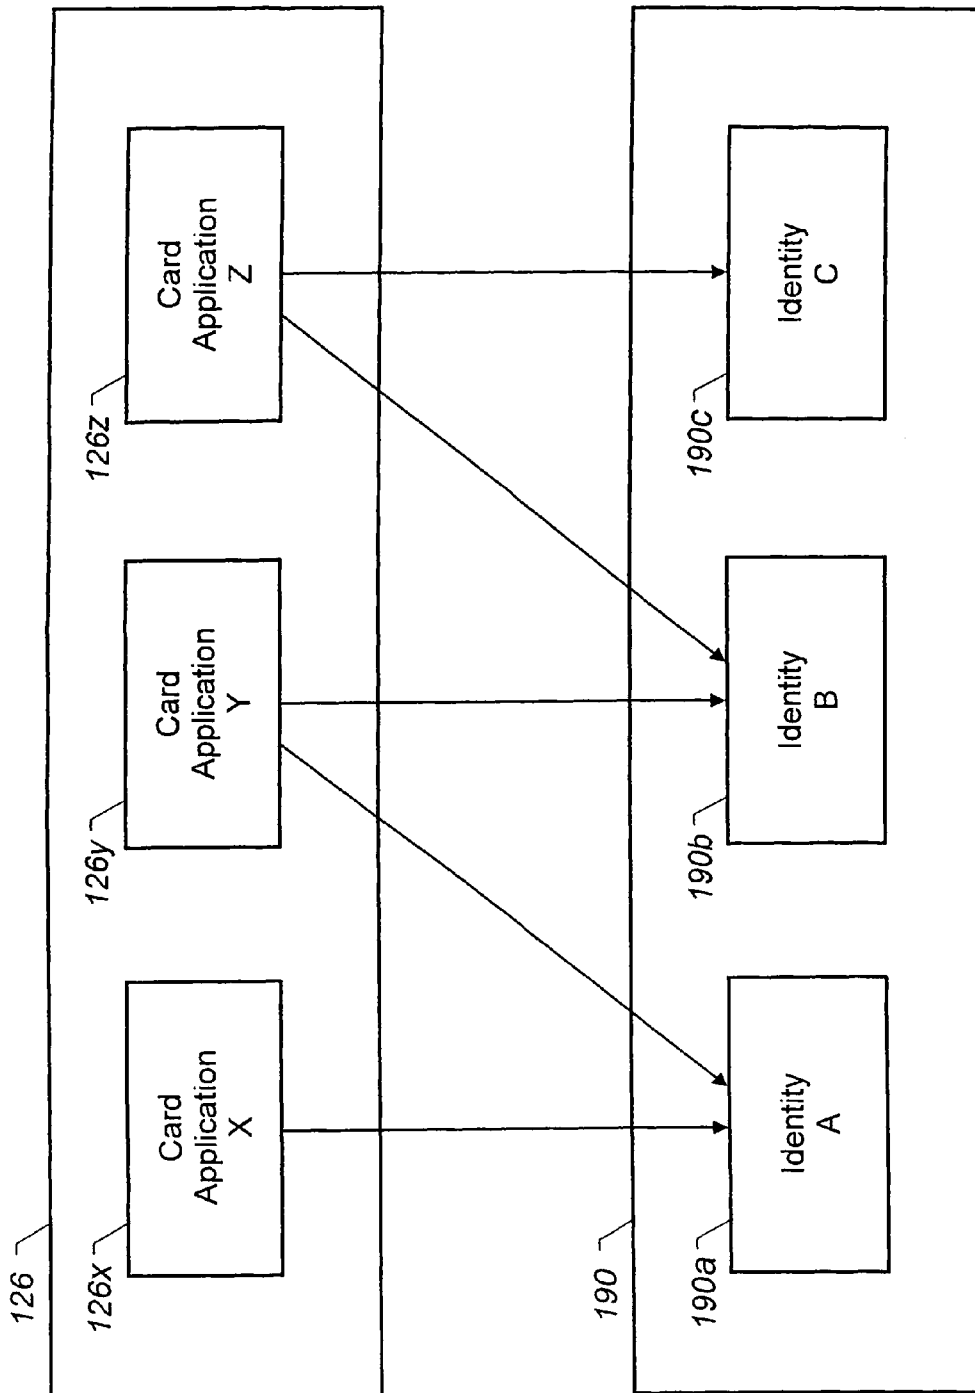


FIGURE 19

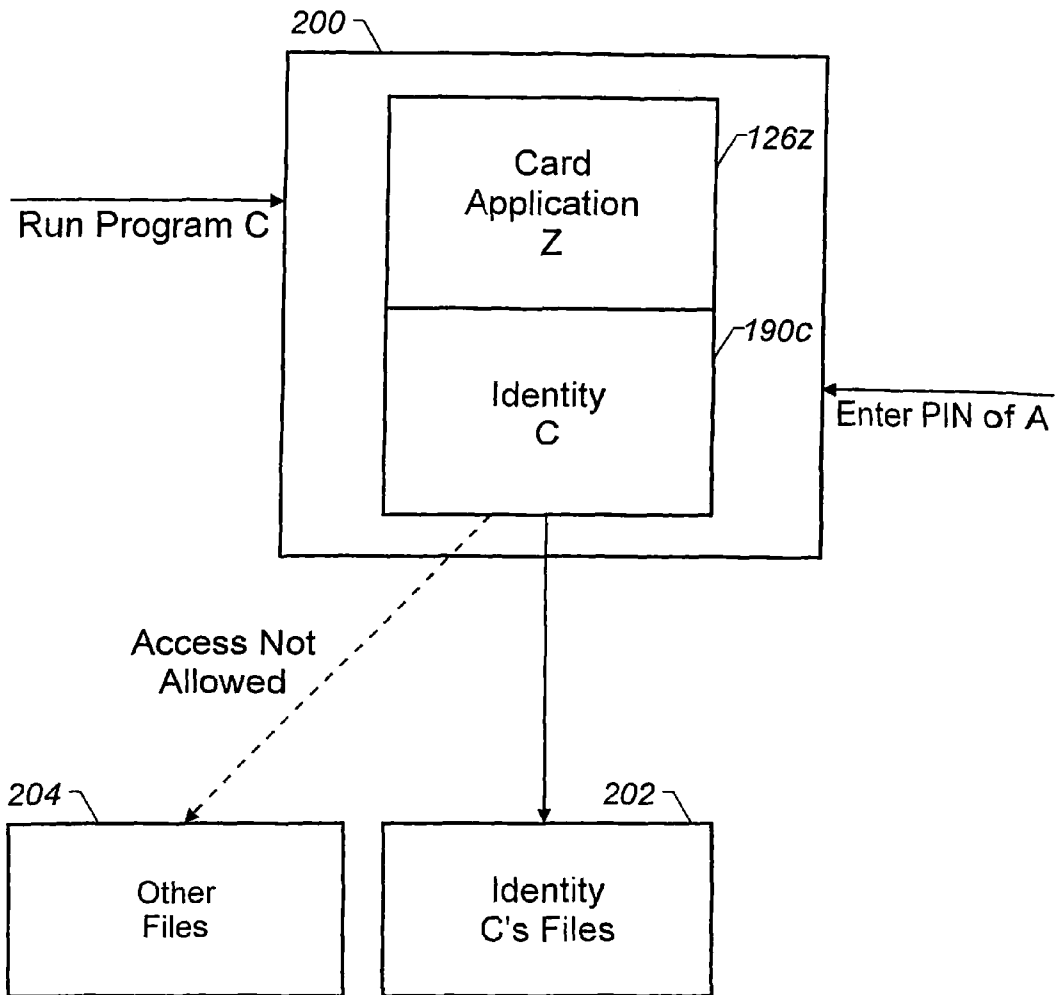


FIGURE 20

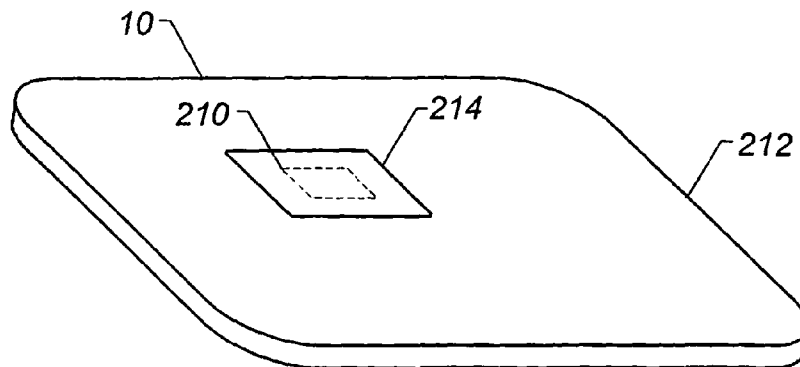


FIGURE 21

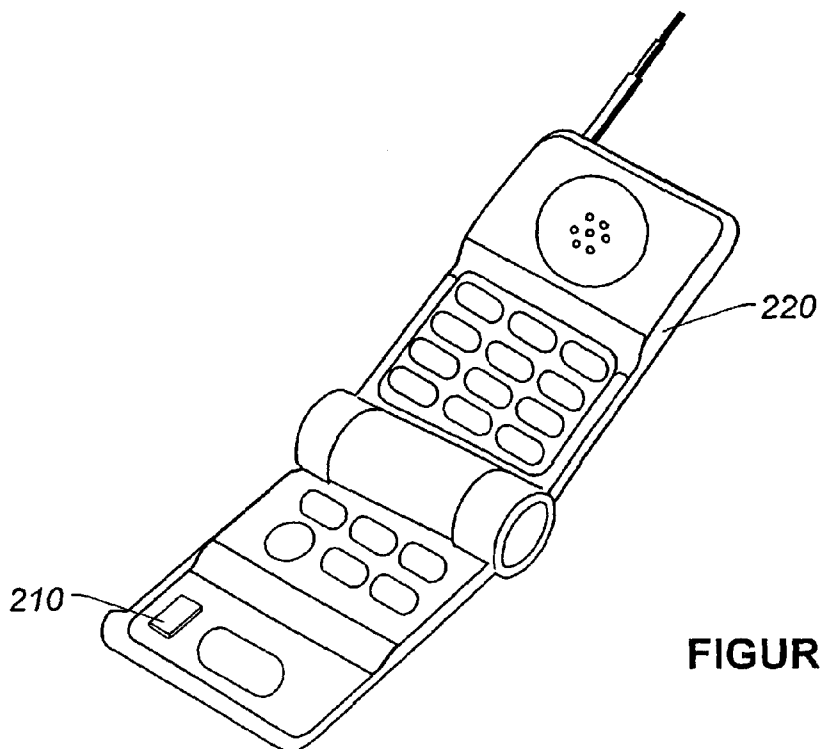


FIGURE 22

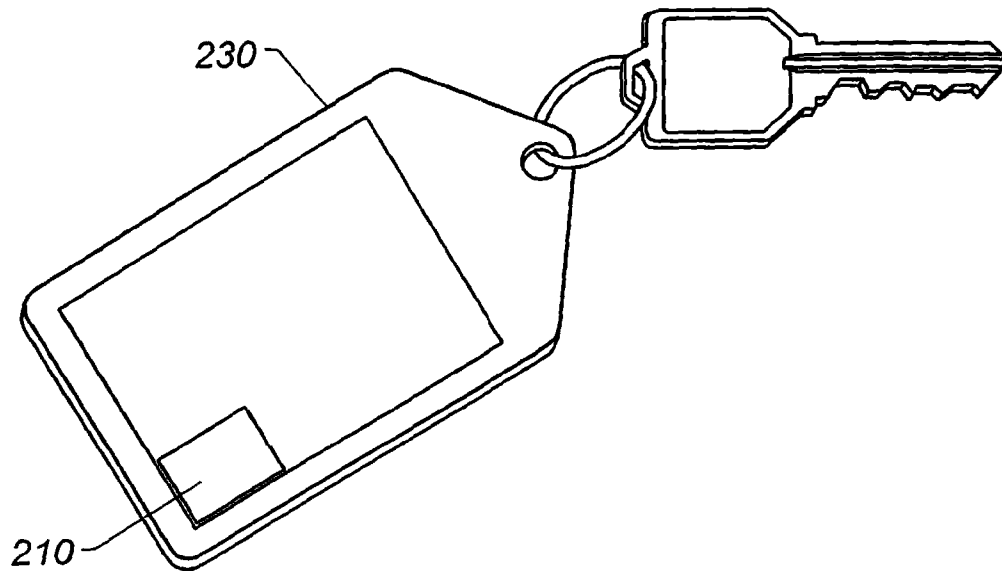


FIGURE 23

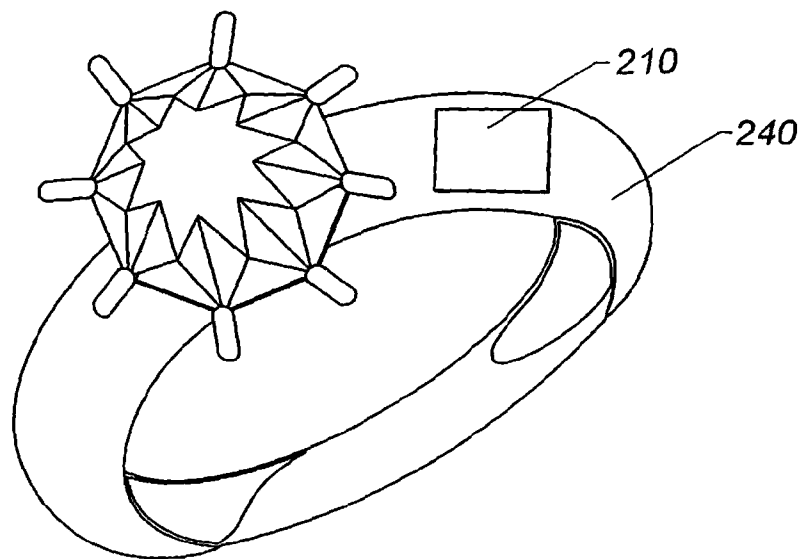


FIGURE 24

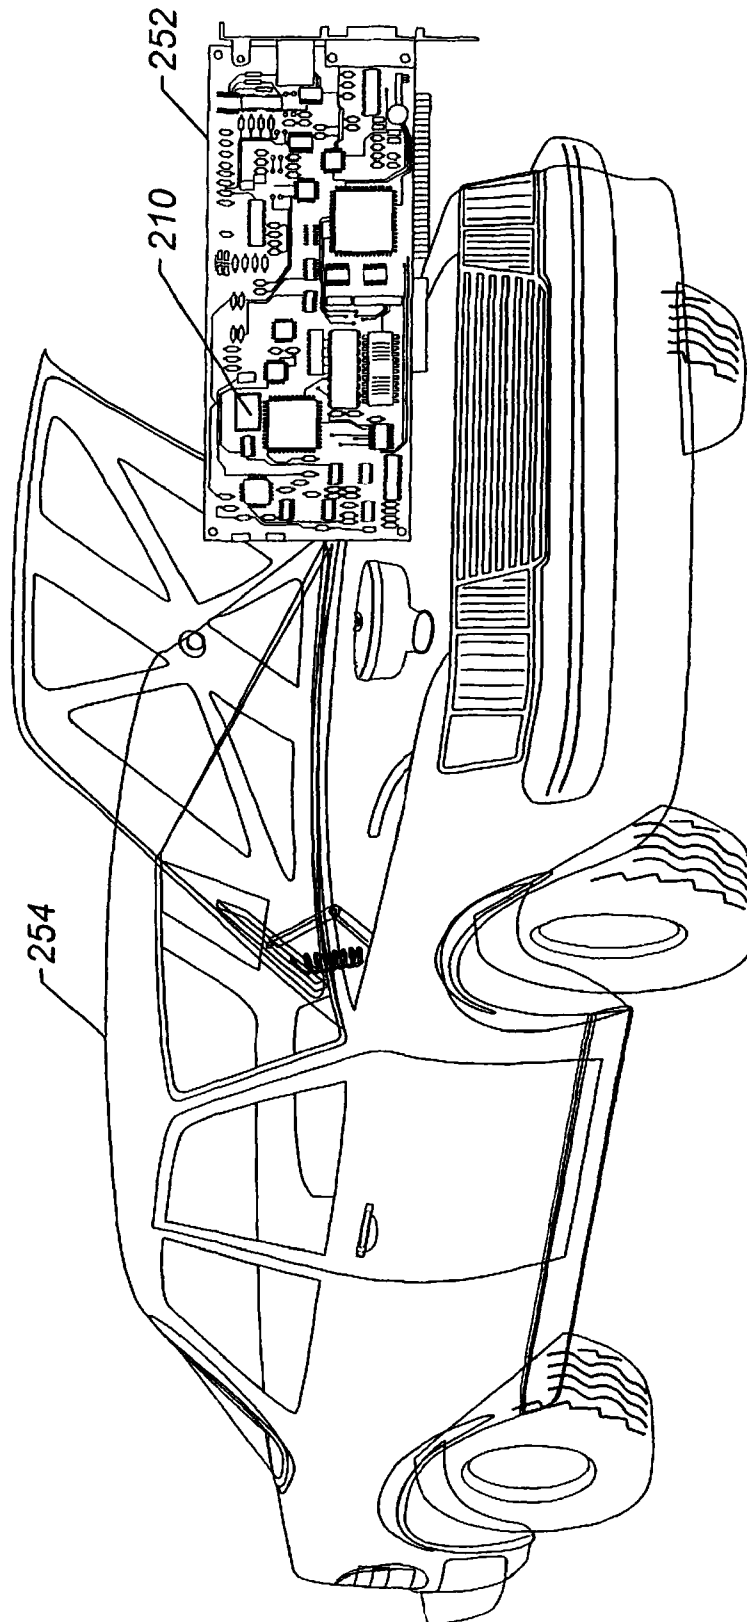


FIGURE 25

US 7,818,727 B2

1

USING A HIGH LEVEL PROGRAMMING LANGUAGE WITH A MICROCONTROLLER**CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation application, under 35 U.S.C. §120, of application Ser. No. 10/037,390, filed Oct. 23, 2001, now U.S. Pat. No. 7,117,485, which is a continuation application, under 35 U.S.C. §120, of application Ser. No. 08/957,512, filed Oct. 24, 1997, now U.S. Pat. No. 6,308,317, which, under 35 U.S.C. §119(e), claims benefit of prior U.S. provisional application Ser. No. 60/029,057, filed Oct. 25, 1996.

RESERVATION OF COPYRIGHTS

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

This invention relates in general to the field of programming, and more particularly to using a high level programming language with a smart card or a microcontroller.

Software applications written in the Java high-level programming language have been so designed that an application written in Java can be run on many different computer brands or computer platforms without change. This is accomplished by the following procedure. When a Java application is written, it is compiled into "Class" files containing byte codes that are instructions for a hypothetical computer called a Java Virtual Machine. An implementation of this virtual machine is written for each platform that is supported. When a user wishes to run a particular Java application on a selected platform, the class files compiled from the desired application is loaded onto the selected platform. The Java virtual machine for the selected platform is run, and interprets the byte codes in the class file, thus effectively running the Java application.

Java is described in the following references which are hereby incorporated by reference: (1) Arnold, Ken, and James Gosling, "The Java Programming Language," Addison-Wesley, 1996; (2) James Gosling, Bill Joy, and Guy Steele, "The Java Language Specification," Sun Microsystems, 1996, (web site: http://java.sun.com/doc/language_specification); (3) James Gosling and Henry McGilton, "The Java Language Environment: A White Paper," Sun Microsystems, 1995 (web site: http://java.sun.com/doc/language_environment/); and (4) Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1997. These texts among many others describe how to program using Java.

In order for a Java application to run on a specific platform, a Java virtual machine implementation must be written that will run within the constraints of the platform, and a mechanism must be provided for loading the desired Java application on the platform, again keeping within the constraints of this platform.

Conventional platforms that support Java are typically microprocessor-based computers, with access to relatively large amounts of memory and hard disk storage space. Such microprocessor implementations frequently are used in desktop and personal computers. However, there are no conven-

2

tional Java implementations on microcontrollers, as would typically be used in a smart card.

Microcontrollers differ from microprocessors in many ways. For example, a microprocessor typically has a central processing unit that requires certain external components (e.g., memory, input controls and output controls) to function properly. A typical microprocessor can access from a megabyte to a gigabyte of memory, and is capable of processing 16, 32, or 64 bits of information or more with a single instruction. In contrast to the microprocessor, a microcontroller includes a central processing unit, memory and other functional elements, all on a single semiconductor substrate, or integrated circuit (e.g., a "chip"). As compared to the relatively large external memory accessed by the microprocessor, the typical microcontroller accesses a much smaller memory. A typical microcontroller can access one to sixty-four kilobytes of built-in memory, with sixteen kilobytes being very common.

There are generally three different types of memory used: random access memory (RAM), read only memory (ROM), and electrically erasable programmable read only memory (EEPROM). In a microcontroller, the amount of each kind of memory available is constrained by the amount of space on the integrated circuit used for each kind of memory. Typically, RAM takes the most space, and is in shortest supply. ROM takes the least space, and is abundant. EEPROM is more abundant than RAM, but less than ROM.

Each kind of memory is suitable for different purposes. Although ROM is the least expensive, it is suitable only for data that is unchanging, such as operating system code. EEPROM is useful for storing data that must be retained when power is removed, but is extremely slow to write. RAM can be written and read at high speed, but is expensive and data in RAM is lost when power is removed. A microprocessor system typically has relatively little ROM and EEPROM, and has 1 to 128 megabytes of RAM, since it is not constrained by what will fit on a single integrated circuit device, and often has access to an external disk memory system that serves as a large writable, non-volatile storage area at a lower cost than EEPROM. However, a microcontroller typically has a small RAM of 0.1 to 2.0 K, 2K to 8K of EEPROM, and 8K-56K of ROM.

Due to the small number of external components required and their small size, microcontrollers frequently are used in integrated circuit cards, such as smart cards. Such smart cards come in a variety of forms, including contact-based cards, which must be inserted into a reader to be used, and contactless cards, which need not be inserted. In fact, microcontrollers with contactless communication are often embedded into specialized forms, such as watches and rings, effectively integrating the functionality of a smart card in an ergonomically attractive manner.

Because of the constrained environment, applications for smart cards are typically written in a low level programming language (e.g., assembly language) to conserve memory.

The integrated circuit card is a secure, robust, tamper-resistant and portable device for storing data. The integrated circuit card is the most personal of personal computers because of its small size and because of the hardware and software data security features unique to the integrated circuit card.

The primary task of the integrated circuit card and the microcontroller on the card is to protect the data stored on the card. Consequently, since its invention in 1974, integrated circuit card technology has been closely guarded on these same security grounds. The cards were first used by French banks as debit cards. In this application, before a financial transaction based on the card is authorized, the card user must

US 7,818,727 B2

3

demonstrate knowledge of a 4-digit personal identification number (PIN) stored in the card in addition to being in possession of the card. Any information that might contribute to discovering the PIN number on a lost or stolen card was blocked from public distribution. In fact, since nobody could tell what information might be useful in this regard, virtually all information about integrated circuit cards was withheld.

Due to the concern for security, applications written for integrated circuit cards have unique properties. For example, each application typically is identified with a particular owner or identity. Because applications typically are written in a low-level programming language, such as assembly language, the applications are written for a particular type of microcontroller. Due to the nature of low level programming languages, unauthorized applications may access data on the integrated circuit card. Programs written for an integrated circuit card are identified with a particular identity so that if two identities want to perform the same programming function there must be two copies of some portions of the application on the microcontroller of the integrated circuit card.

Integrated circuit card systems have historically been closed systems. An integrated circuit card contained a dedicated application that was handcrafted to work with a specific terminal application. Security checking when an integrated circuit card was used consisted primarily of making sure that the card application and the terminal application were a matched pair and that the data on the card was valid.

As the popularity of integrated circuit cards grew, it became clear that integrated circuit card users would be averse to carrying a different integrated circuit card for each integrated circuit card application. Therefore, multiple cooperating applications began to be provided on single provider integrated circuit cards. Thus, for example, an automated teller machine (ATM) access card and a debit card may coexist on a single integrated circuit card platform. Nevertheless, this was still a closed system since all the applications in the terminal and the card were built by one provider having explicit knowledge of the other providers.

The paucity of information about integrated circuit cards—particularly information about how to communicate with them and how to program them—has impeded the general application of the integrated circuit card. However, the advent of public digital networking (e.g., the Internet and the World Wide Web) has opened new domains of application for integrated circuit cards. In particular, this has led to a need to load new applications on the card that do not have explicit knowledge of the other providers, but without the possibility of compromising the security of the card. However, typically, this is not practical with conventional cards that are programmed using low level languages.

SUMMARY OF THE INVENTION

In general, in one aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a memory that stores an interpreter and an application that has a high level programming language format. A processor of the card is configured to use the interpreter to interpret the application for execution and to use a communicator of the

Among the advantages of the invention are one or more of the following. New applications may be downloaded to a smart card without compromising the security of the smart card. These applications may be provided by different companies loaded at different times using different terminals. Security is not compromised since the applications are protected against unauthorized access of any application code or

4

data by the security features provided by the Java virtual machine. Smart card applications can be created in high level languages such as Java and Eiffel, using powerful mainstream program development tools. New applications can be quickly prototyped and downloaded to a smart card in a matter of hours without resorting to soft masks. Embedded systems using microcontrollers can also gain many of these advantages for downloading new applications, high level program development, and rapid prototyping by making use of this invention.

Implementations of the invention may include one or more of the following. The high level programming language format of the application may have a class file format and may have a Java programming language format. The processor may be a microcontroller. At least a portion of the memory may be located in the processor.

The application may have been processed from a second application that has a string of characters, and the string of characters may be represented in the first application by an identifier (e.g., an integer).

The processor may be also configured to receive a request from a requester (e.g., a processor or a terminal) to access an element (e.g., an application stored in the memory, data stored in the memory or the communicator) of the card, after receipt of the request, interact with the requester to authenticate an identity of the requester, and based on the identity, selectively grant access to the element.

The memory may also store an access control list for the element. The access control list furnishes an indication of types of access to be granted to the identity, and based on the access control list, the processor selectively grants specific types of access (e.g., reading data, writing data, appending data, creating data, deleting data or executing an application) to the requester.

The application may be one of a several applications stored in the memory. The processor may be further configured to receive a request from a requester to access one of the plurality of applications; after receipt of the request, determine whether said one of the plurality of applications complies with a predetermined set of rules; and based on the determination, selectively grant access to the requester to said one of the plurality of applications. The predetermined rules provide a guide for determining whether said one of the plurality of applications accesses a predetermined region of the memory. The processor may be further configured to authenticate an identity of the requester and grant access to said one of the plurality of applications based on the identity.

The processor may be also configured to interact with the terminal via the communicator to authenticate an identity; determine if the identity has been authenticated; and based on the determination, selectively allow communication between the terminal and the integrated circuit card.

The communicator and the terminal may communicate via communication channels. The processor may also be configured to assign one of the communication channels to the identity when the processor allows the communication between the terminal and the integrated circuit card. The processor may also be configured to assign a session key to the assigned communication channel and use the session key when the processor and the terminal communicate via the assigned communication channel.

The terminal may have a card reader, and the communicator may include a contact for communicating with the card reader. The terminal may have a wireless communication device, and the communicator may include a wireless transceiver for communicating with the wireless communication device. The terminal may have a wireless communication

US 7,818,727 B2

5

device, and the communicator may include a wireless transmitter for communicating with the wireless communication device.

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes storing an interpreter and at least one application having a high level programming language format in a memory of the integrated circuit card. A processor of the integrated circuit card uses the interpreter to interpret the at least one application for execution, and the processor uses a communicator of the card when communicating between the processor and the terminal.

In general, in another aspect, the invention features a smart card. The smart card includes a memory that stores a Java interpreter and a processor that is configured to use the interpreter to interpret a Java application for execution.

In general, in another aspect, the invention features a microcontroller that has a semiconductor substrate and a memory located in the substrate. A programming language interpreter is stored in the memory and is configured to implement security checks. A central processing unit is located in the substrate and is coupled to the memory.

Implementations of the invention may include one or more of the following. The interpreter may be a Java byte code interpreter. The security checks may include establishing firewalls and may include enforcing a sandbox security model.

In general, in another aspect, the invention features a smart card that has a programming language interpreter stored in a memory of the card. The interpreter is configured to implement security check. A central processing unit of the card is coupled to the memory.

In general, in another aspect, the invention features an integrated circuit card that is used with a terminal. The card includes a communicator and a memory that stores an interpreter and first instructions of a first application. The first instructions have been converted from second instructions of a second application. The integrated circuit card includes a processor that is coupled to the memory and is configured to use the interpreter to execute the first instructions and to communicate with the terminal via the communicator.

Implementations of the invention may include one or more of the following. The first and/or second applications may have class file format(s). The first and/or second applications may include byte codes, such as Java byte codes. The first instructions may be generalized or renumbered versions of the second instructions. The second instructions may include constant references, and the first instructions may include constants that replace the constant references of the second instructions. The second instructions may include references, and the references may shift location during the conversion of the second instructions to the first instructions. The first instructions may be relinked to the references after the shifting. The first instructions may include byte codes for a first type of virtual machine, and the second instructions may include byte codes for a second type of virtual machine. The first type is different from the second type.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes converting second instructions of a second application to first instructions of a first application; storing the first instructions in a memory of the integrated circuit card; and using an interpreter of the integrated circuit card to execute the first instructions.

In general, in another aspect, the invention features an integrated circuit for use with a terminal. The integrated circuit card has a communicator that is configured to communicate with the terminal and a memory that stores a first appli-

6

cation that has been processed from a second application having a string of characters. The string of characters are represented in the first application by an identifier. The integrated circuit card includes a processor that is coupled to the memory. The processor is configured to use the interpreter to interpret the first application for execution and to use the communicator to communicate with the terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card and a terminal. The method includes processing a second application to create a first application. The second application has a string of characters. The string of characters is represented by an identifier in the second application. An interpreter and the first application are stored in a memory of the integrated circuit card. A processor uses an interpreter to interpret the first application for execution.

In general, in another aspect, the invention features a microcontroller that includes a memory which stores an application and an interpreter. The application has a class file format. A processor of the microcontroller is coupled to the memory and is configured to use the interpreter to interpret the application for execution.

In implementations of the invention, the microcontroller may also include a communicator that is configured to communicate with a terminal.

In general, in another aspect, the invention features a method for use with an integrated circuit card. The method includes storing a first application in a memory of the integrated circuit card, storing a second application in the memory of the integrated circuit card, and creating a firewall that isolates the first and second applications so that the second application cannot access either the first application or data associated with the first application.

In general, in another aspect, the invention features an integrated circuit card for use with a terminal. The integrated circuit card includes a communicator that is configured to communicate with the terminal, a memory and a processor. The memory stores applications, and each application has a high level programming language format. The memory also stores an interpreter. The processor is coupled to the memory and is configured to: a.) use the interpreter to interpret the applications for execution, b.) use the interpreter to create a firewall to isolate the applications from each other, and c.) use the communicator to communicate with the terminal.

Other advantages and features will become apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a block diagram of an integrated card system.

FIG. 2 is a flow diagram illustrating the preparation of Java applications to be downloaded to an integrated circuit card.

FIG. 3 is a block diagram of the files used and generated by the card class file converter.

FIG. 4 is a block diagram illustrating the transformation of application class file(s) into a card class file.

FIG. 5 is a flow diagram illustrating the working of the class file converter.

FIG. 6 is a flow diagram illustrating the modification of the byte codes.

FIG. 7 is a block diagram illustrating the transformation of specific byte codes into general byte codes.

FIG. 8 is a block diagram illustrating the replacement of constant references with constants.

FIG. 9 is a block diagram illustrating the replacement of references with their updated values.

US 7,818,727 B2

7

FIG. 10 is a block diagram illustrating renumbering of original byte codes.

FIG. 11 is a block diagram illustrating translation of original byte codes for a different virtual machine architecture.

FIG. 12 is a block diagram illustrating loading applications into an integrated circuit card.

FIG. 13 is a block diagram illustrating executing applications in an integrated circuit card.

FIG. 14 is a schematic diagram illustrating memory organization for ROM, RAM and EEPROM.

FIG. 15 is a flow diagram illustrating the overall architecture of the Card Java virtual machine.

FIG. 16 is a flow diagram illustrating method execution in the Card Java virtual machine with the security checks.

FIG. 17 is a flow diagram illustrating byte code execution in the Card Java virtual machine.

FIG. 18 is a flow diagram illustrating method execution in the Card Java virtual machine without the security checks.

FIG. 19 is a block diagram illustrating the association between card applications and identities.

FIG. 20 is a block diagram illustrating the access rights of a specific running application.

FIG. 21 is a perspective view of a microcontroller on a smart card.

FIG. 22 is a perspective view of a microcontroller on a telephone.

FIG. 23 is a perspective view of a microcontroller on a key ring.

FIG. 24 is a perspective view of a microcontroller on a ring.

FIG. 25 is a perspective view of a microcontroller on a circuit card of an automobile.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, an integrated circuit card 10 (e.g., a smart card) is constructed to provide a high level, Java-based, multiple application programming and execution environment. The integrated circuit card 10 has a communicator 12a that is configured to communicate with a terminal communicator 12b of a terminal 14. In some embodiments, the integrated circuit card 10 is a smart card with an 8 bit microcontroller, 512 bytes of RAM, 4K bytes of EEPROM, and 20K of ROM; the terminal communicator 12b is a conventional contact smart card reader; and the terminal 14 is a conventional personal computer running the Windows NT operating system supporting the personal computer smart card (PC/SC) standard and providing Java development support.

In some embodiments, the microcontroller, memory and communicator are embedded in a plastic card that has substantially the same dimensions as a typical credit card. In other embodiments, the microcontroller, memory and communicator are mounted within bases other than a plastic card, such as jewelry (e.g., watches, rings or bracelets), automotive equipment, telecommunication equipment (e.g., subscriber identity module (SIM) cards), security devices (e.g., cryptographic modules) and appliances.

The terminal 14 prepares and downloads Java applications to the integrated circuit card 10 using the terminal communicator 12b. The terminal communicator 12b is a communications device capable of establishing a communications channel between the integrated circuit card 10 and the terminal 14. Some communication options include contact card readers, wireless communications via radio frequency or infrared techniques, serial communication protocols, packet communication protocols, ISO 7816 communication protocol, to name a few.

8

The terminal 14 can also interact with applications running in the integrated circuit card 10. In some cases, different terminals may be used for these purposes. For example, one kind of terminal may be used to prepare applications, different terminals could be used to download the applications, and yet other terminals could be used to run the various applications. Terminals can be automated teller machines (ATMs), point-of-sale terminals, door security systems, toll payment systems, access control systems, or any other system that communicates with an integrated circuit card or microcontroller.

The integrated circuit card 10 contains a card Java virtual machine (Card JVM) 16, which is used to interpret applications which are contained on the card 10.

Referring to FIG. 2, the Java application 20 includes three Java source code files A.java 20a, B.java 20b, and C.java 20c. These source code files are prepared and compiled in a Java application development environment 22. When the Java application 20 is compiled by the development environment 22, application class files 24 are produced, with these class files A.class 24a, B.class 24b, and C.class 24c corresponding to their respective class Java source code 20a, 20b, and 20c. The application class files 24 follow the standard class file format as documented in chapter 4 of the Java virtual machine specification by Tim Lindholm and Frank Yellin, "The Java Virtual Machine Specification," Addison-Wesley, 1996. These application class files 24 are fed into the card class file converter 26, which consolidates and compresses the files, producing a single card class file 27. The card class file 27 is loaded to the integrated circuit card 10 using a conventional card loader 28.

Referring to FIG. 3, the card class file converter 26 is a class file postprocessor that processes a set of class files 24 that are encoded in the standard Java class file format, optionally using a string to ID input map file 30 to produce a Java card class file 27 in a card class file format. One such card class file format is described in Appendix A which is hereby incorporated by reference. In addition, in some embodiments, the card class file converter 26 produces a string to ID output map file 32 that is used as input for a subsequent execution of the card class file converter.

In some embodiments, in order for the string to ID mapping to be consistent with a previously generated card class file (in the case where multiple class files reference the same strings), the card class file converter 26 can accept previously defined string to ID mappings from a string to ID input map file 30. In the absence of such a file, the IDs are generated by the card class file converter 26. Appendix B, which is hereby incorporated by reference, describes one possible way of implementing and producing the string to ID input map file 30 and string to ID output map file 32 and illustrates this mapping via an example.

Referring to FIG. 4, a typical application class file 24a includes class file information 41; a class constant pool 42; class, fields created, interfaces referenced, and method information 43; and various attribute information 44, as detailed in aforementioned Java Virtual Machine Specification. Note that much of the attribute information 44 is not needed for this embodiment and is eliminated 45 by the card class file converter 26. Eliminated attributes include SourceFile, ConstantValue, Exceptions, LineNumberTable, LocalVariableTable, and any optional vendor attributes. The typical card class file 27 as described in Appendix A is derived from the application class files 24 in the following manner. The card class file information 46 is derived from the aggregate class file information 41 of all application class files 24a, 24b, and 24c. The card class file constant pool 47 is derived from the

US 7,818,727 B2

9

aggregate class constant pool **42** of all application class files **24a**, **24b**, and **24c**. The card class, fields created, interfaces referenced, and method information **48** is derived from the aggregate class, fields created, interfaces referenced, and method information **43** of all application class files **24a**, **24b**, and **24c**. The card attribute information **49** in this embodiment is derived from only the code attribute of the aggregate attribute information **44** of all application class files **24a**, **24b**, and **24c**.

To avoid dynamic linking in the card, all the information that is distributed across several Java class files **24a**, **24b**, and **24c** that form the application **24**, are coalesced into one card class file **27** by the process shown in the flowchart in FIG. **5**. The first class file to be processed is selected **51a**. The constant pool **42** is compacted **51b** in the following manner. All objects, classes, fields, methods referenced in a Java class file **24a** are identified by using strings in the constant pool **42** of the class file **24a**. The card class file converter **26** compacts the constant pool **42** found in the Java class file **24a** into an optimized version. This compaction is achieved by mapping all the strings found in the class file constant pool **42** into integers (the size of which is microcontroller architecture dependent). These integers are also referred to as IDs. Each ID uniquely identifies a particular object, class, field or method in the application **20**. Therefore, the card class file converter **26** replaces the strings in the Java class file constant pool **42** with its corresponding unique ID. Appendix B shows an example application HelloSmartCard.java, with a table below illustrating the IDs corresponding to the strings found in the constant pool of the class file for this application. The IDs used for this example are 16-bit unsigned integers.

Next, the card class file converter **26** checks for unsupported features **51c** in the Code attribute of the input Java class file **24a**. The Card JVM **16** only supports a subset of the full Java byte codes as described in Appendix C, which is hereby incorporated by reference. Hence, the card class file converter **26** checks for unsupported byte codes in the Code attribute of the Java class file **24a**. If any unsupported byte codes are found **52**, the card class file converter flags an error and stops conversion **53**. The program code fragment marked "A" in APPENDIX D shows how these spurious byte codes are apprehended. Another level of checking can be performed by requiring the standard Java development environment **22** to compile the application **20** with a '-g' flag. Based on the aforementioned Java virtual machine specification, this option requires the Java compiler to place information about the variables used in a Java application **20** in the LocalVariableTable attribute of the class file **24a**. The card class file converter **26** uses this information to check if the Java class file **24a** references data types not supported by the Java card.

Next, the card class file converter **26** discards all the unnecessary parts **51c** of the Java class file **24a** not required for interpretation. A Java class file **24a** stores information pertaining to the byte codes in the class file in the Attributes section **44** of the Java class file. Attributes that are not required for interpretation by the card JVM **16**, such as SourceFile, ConstantValue, Exceptions, LineNumberTable, and LocalVariableTable may be safely discarded **45**. The only attribute that is retained is the Code attribute. The Code attribute contains the byte codes that correspond to the methods in the Java class file **24a**.

Modifying the byte codes **54** involves examining the Code attribute information **44** for each method in the class file, and modifying the operands of byte codes that refer to entries in the Java class file constant pool **42** to reflect the entries in the card class file constant pool **47**. In some embodiments, the byte codes are also modified, as described below.

10

Modifying the byte codes **54** involves five passes (with two optional passes) as described by the flowchart in FIG. **6**. The original byte codes **60** are found in the Code attribute **44** of the Java class file **24a** being processed. The first pass **61** records all the jumps and their destinations in the original byte codes. During later byte code translation, some single byte code may be translated to dual or triple bytes. FIG. **7** illustrates an example wherein byte code ILOAD_0 is replaced with two bytes, byte code ILOAD and argument **0**. When this is done, the code size changes, requiring adjustment of any jump destinations which are affected. Therefore, before these transformations are made, the original byte codes **60** are analyzed for any jump byte codes and a note made of their position and current destination. The program code fragment marked "B" in Appendix D shows how these jumps are recorded. Appendix D is hereby incorporated by reference.

Once the jumps are recorded, if the optional byte code translation is not being performed **62**, the card class file converter **26** may proceed to the third pass **64**.

Otherwise, the card class file converter converts specific byte codes into generic byte codes. Typically, the translated byte codes are not interpreted in the Card JVM **16** but are supported by converting the byte codes into equivalent byte codes that can be interpreted by the Card JVM **16** (see FIG. **7**). The byte codes **70** may be replaced with another semantically equivalent but different byte codes **72**. This generally entails the translation of short single specific byte codes such as ILOAD_0 into their more general versions. For example, ILOAD_0 may be replaced by byte code ILOAD with an argument **0**. This translation is done to reduce the number of byte codes translated by the Card JVM **16**, consequently reducing the complexity and code space requirements for the Card JVM **16**. The program code fragment marked "C" in Appendix D shows how these translations are made. Note that such translations increase the size of the resulting byte code and force the re-computation of any jumps which are affected.

In the third pass **64**, the card class file converter rebuilds constant references via elimination of the strings used to denote these constants. FIG. **8** shows an example wherein the byte code LDC **80** referring to constant "18" found via an index in the Java class file **24a** constant pool **42** may be translated into BIPUSH byte code **82**. In this pass the card class file converter **26** modifies the operands to all the byte codes that refer to entries in the Java class file constant pool **42** to reflect their new location in the card class file constant pool **47**. FIG. **9** shows an example wherein the argument to a byte code, INVOKESTATIC **90**, refers to an entry in the Java class file constant pool **42** that is modified to reflect the new location of that entry in the card class file constant pool **47**. The modified operand **94** shows this transformation. The program code fragment marked "D" in Appendix D shows how these modifications are made.

Once the constant references are relinked, if the optional byte code modification is not being performed, the card class file converter may proceed to the fifth and final pass **67**.

Otherwise, the card class file converter modifies the original byte codes into a different set of byte codes supported by the particular Card JVM **16** being used. One potential modification renumbers the original byte codes **60** into Card JVM **16** byte codes (see FIG. **10**). This renumbering causes the byte codes **100** in the original byte codes **60** to be modified into a renumbered byte codes **102**. Byte code ILOAD recognized by value **21** may be renumbered to be recognized by value **50**. This modification may be done for optimizing the type tests (also known in prior art as Pass **3** checks) in the Card JVM **16**. The program code fragment marked "E" in Appendix D shows an implementation of this embodiment. This modifi-

US 7,818,727 B2

11

cation may be done in order to reduce the program space required by the Card JVM 16 to interpret the byte code. Essentially this modification regroups the byte codes into Card JVM 16 byte codes so that byte codes with similar operands, results are grouped together, and there are no gaps between Card JVM 16 byte codes. This allows the Card JVM 16 to efficiently check Card JVM 16 byte codes and validate types as it executes.

In some embodiments, the card class file converter modifies the original byte codes 60 into a different set of byte codes designed for a different virtual machine architecture, as shown in FIG. 11. The Java byte code ILOAD 112 intended for use on a word stack 114 may be replaced by Card JVM 16 byte code ILOAD_B 116 to be used on a byte stack 118. An element in a word stack 114 requires allocating 4 bytes of stack space, whereas an element in the byte stack 118 requires only one byte of stack space. Although this option may provide an increase in execution speed, it risks losing the security features available in the original byte codes.

Since the previous steps 63, 64 or 66 may have changed the size of the byte codes 60 the card class file converter 26 has to relink 67 any jumps which have been effected. Since the jumps were recorded in the first step 61 of the card class file converter 26, this adjustment is carried out by fixing the jump destinations to their appropriate values. The program code fragment marked "F" in Appendix D shows how these jumps are fixed.

The card class file converter now has modified byte codes 68 that is equivalent to the original byte codes 60 ready for loading. The translation from the Java class file 24a to the card class file 27 is now complete.

Referring back to FIG. 5, if more class files 24 remain to be processed 55 the previous steps 51a, 51b, 51c, 52 and 54 are repeated for each remaining class file. The card class file converter 26 gathers 56 the maps and modified byte codes for the classes 24 that have been processed, places them as an aggregate and generates 57 a card class file 27. If required, the card class file converter 26 generates a string to ID output map file 32, that contains a list of all the new IDs allocated for the strings encountered in the constant pool 42 of the Java class files 24 during the translation.

Referring to FIG. 12, the card loader 28 within the terminal 14 sends a card class file to the loading and execution control 120 within the integrated circuit card 10 using standard ISO 7816 commands. The loading and execution control 120 with a card operating system 122, which provides the necessary system resources, including support for a card file system 124, which can be used to store several card applications 126. Many conventional card loaders are written in low level languages, supported by the card operating system 122. In the preferred embodiment, the bootstrap loader is written in Java, and the integrated circuit card 10 includes a Java virtual machine to run this application. A Java implementation of the loading and execution control 120 is illustrated in Appendix E which is hereby incorporated by reference. The loading and execution control 120 receives the card class file 26 and produces a Java card application 126x stored in the card file system 126 in the EEPROM of the integrated circuit card 10. Multiple Java card applications 126x, 126y, and 126z can be stored in a single card in this manner. The loading and execution control 120 supports commands whereby the terminal 14 can select which Java card application to run immediately, or upon the next card reset.

Referring to FIG. 13, upon receiving a reset or an execution command from the loading and execution control 120, the Card Java Virtual Machine (Card JVM) 16 begins execution at a predetermined method (for example, main) of the

12

selected class in the selected Java Card application 126z. The Card JVM 16 provides the Java card application 126z access to the underlying card operating system 122, which provides capabilities such as I/O, EEPROM support, file systems, access control, and other system functions using native Java methods as illustrated in Appendix F which is hereby incorporated by reference.

The selected Java card application 126z communicates with an appropriate application in the terminal 14 using the communicator 12a to establish a communication channel to the terminal 14. Data from the communicator 12a to the terminal 14 passes through a communicator driver 132 in the terminal, which is specifically written to handle the communications protocol used by the communicator 12a. The data then passes to an integrated circuit card driver 134, which is specifically written to address the capabilities of the particular integrated circuit card 10 being used, and provides high level software services to the terminal application 136. In the preferred embodiment, this driver would be appropriate PC/SC Smartcard Service Provider (SSP) software. The data then passes to the terminal application 136, which must handle the capabilities provided by the particular card application 126z being run. In this manner, commands and responses pass back and forth between the terminal application 136 and the selected card application 126z. The terminal application interacts with the user, receiving commands from the user, some of which are passed to the selected Java card application 126z, and receiving responses from the Java card application 126z, which are processed and passed back to the user.

Referring to FIG. 14, the Card JVM 16 is an interpreter that interprets a card application 126x. The memory resources in the microcontroller that impact the Card JVM 16 are the Card ROM 140, Card RAM 141 and the Card EEPROM 142. The Card ROM 140 is used to store the Card JVM 16 and the card operating system 122. Card ROM 140 may also be used to store fixed card applications 140a and class libraries 140b. Loadable applications 141a, 141b and libraries 141c may also be stored in Card RAM 141. The Card JVM 16 interprets a card application 141a, 141b, or 140a. The Card JVM 16 uses the Card RAM to store the VM stack 144a and system state variables 144b. The Card JVM 16 keeps track of the operations performed via the VM stack 144a. The objects created by the Card JVM 16 are either on the RAM heap 144c, in the EEPROM heap 146a, or in the file system 147.

All of the heap manipulated by the Card JVM 16 may be stored in the Card RAM 141 as a RAM Heap 144c, or it may be distributed across to the Card EEPROM 142 as a EEPROM Heap 146a. Card RAM 141 is also used for recording the state of the system stack 148 that is used by routines written in the native code of the microcontroller. The Card JVM 16 uses the Card EEPROM 142 to store application data either in the EEPROM heap 146a or in the file system 147. Application data stored in a file may be manipulated via an interface to the card operating system 122. This interface is provided by a class library 140b stored in Card ROM 140, by a loadable class library 141c stored in Card EEPROM 142. One such interface is described in Appendix F. Applications and data in the card are isolated by a firewall mechanism 149.

To cope with the limited resources available on microcontrollers, the Card JVM 16 implements a strict subset of the Java programming language. Consequently, a Java application 20 compiles into a class file that contains a strict subset of Java byte codes. This enables application programmers to program in this strict subset of Java and still maintain compatibility with existing Java Virtual Machines. The semantics of the Java byte codes interpreted by the Card JVM 16 are

US 7,818,727 B2

13

described in the aforementioned Java Virtual Machine Specification. The subset of byte codes interpreted by the Card JVM 16 can be found in Appendix C. The card class file converter 26 checks the Java application 20 to ensure use of only the features available in this subset and converts into a form that is understood and interpreted by the Card JVM 16.

In other embodiments, the Card JVM 16 is designed to interpret a different set or augmented set of byte codes 116. Although a different byte code set might lead to some performance improvements, departing from a strict Java subset may not be desirable from the point of view of security that is present in the original Java byte codes or compatibility with mainstream Java development tools.

All Card JVM 16 applications 126 have a defined entry point denoted by a class and a method in the class. This entry point is mapped in the string to ID input map 30 and assigned by the card class file converter 26. Classes, methods and fields within a Java application 20 are assigned IDs by the card class file converter 26. For example, the ID corresponding to the main application class may be defined as F001 and the ID corresponding to its main method, such as "main()V" could be defined as F002.

The overall execution architecture of the Card JVM is described by the flowchart in FIG. 15. Execution of the Card JVM 16 begins at the execution control 120, which chooses a card application 126z to execute. It proceeds by finding and assigning an entry point 152 (a method) in this card application for the Card JVM 16 to interpret. The Card JVM 16 interprets the method 153. If the interpretation proceeds successfully 154, the Card JVM 16 reports success 155 returning control back to the execution control 120. If in the course of interpretation 153 the Card JVM 16 encounters an unhandled error or exception (typically a resource limitation or a security violation), the Card JVM 16 stops 156 and reports the appropriate error to the terminal 14.

An essential part of the Card JVM 16 is a subroutine that handles the execution of the byte codes. This subroutine is described by the flowchart in FIG. 16. Given a method 160 it executes the byte codes in this method. The subroutine starts by preparing for the parameters of this method 161. This involves setting the VM stack 144a pointer, VM stack 144a frame limits, and setting the program counter to the first byte code of the method.

Next, the method flags are checked 162. If the method is flagged native, then the method is actually a call to native method code (subroutine written in the microcontroller's native processor code). In this case, the Card JVM 16 prepares for an efficient call 163 and return to the native code subroutine. The parameters to the native method may be passed on the VM stack 144a or via the System stack 148. The appropriate security checks are made and the native method subroutine is called. On return, the result (if any) of the native method subroutine is placed on the VM stack 144a so that it may be accessed by the next byte code to be executed.

The dispatch loop 164 of the Card JVM 16 is then entered. The byte code dispatch loop is responsible for preparing, executing, and retiring each byte code. The loop terminates when it finishes interpreting the byte codes in the method 160, or when the Card JVM 16 encounters a resource limitation or a security violation.

If a previous byte code caused a branch to be taken 165 the Card JVM prepares for the branch 165a. The next byte code is retrieved 165b. In order to keep the cost of processing each byte code down, as many common elements such as the byte code arguments, length, type are extracted and stored.

To provide the security offered by the security model of the programming language, byte codes in the class file must be

14

verified and determined conformant to this model. These checks are typically carried out in prior art by a program referred to as the byte code verifier, which operates in four passes as described in the Java Virtual Machine Specification. To offer the run-time security that is guaranteed by the byte code verifier, the Card JVM 16 must perform the checks that pertain to the Pass 3 and Pass 4 of the verifier. This checking can be bypassed by the Card JVM 16 if it can be guaranteed (which is almost impossible to do) that the byte codes 60 interpreted by the Card JVM 16 are secure. At the minimum, code security can be maintained as long as object references cannot be faked and the VM stack 144a and local variable bounds are observed. This requires checking the state of the VM stack 144a with respect to the byte code being executed.

To enforce the security model of the programming language, a 256-byte table is created as shown in Appendix G which is hereby incorporated by reference. This table is indexed by the byte code number. This table contains the type and length information associated with the indexing byte code. It is encoded with the first 5 bits representing type, and the last 3 bits representing length. The type and length of the byte code is indexed directly from the table by the byte code number. This type and length is then used for checking as shown in Appendix H which is hereby incorporated by reference. In Appendix H, the checking process begins by decoding the length and type from the table in Appendix G which is hereby incorporated by reference. The length is used to increment the program counter. The type is used first for pre-execution checking, to insure that the data types on the VM stack 144a are correct for the byte code that is about to be executed. The 256 bytes of ROM for table storage allows the original Java byte codes to be run in the Card JVM 16 and minimizes the changes required to the Java class file to be loaded in the card. Additional Java byte codes can be easily supported since it is relatively easy to update the appropriate table entries.

In other embodiments, as shown in FIG. 10, the Java byte codes in the method are renumbered in such a manner that the byte code type and length information stored in the table in Appendix H is implicit in the reordering. Appendix H is hereby incorporated by reference. Consequently, the checks that must be performed on the state of the VM stack 144a and the byte code being processed does not have to involve a table look up. The checks can be performed by set of simple comparisons as shown in Appendix I which is hereby incorporated by reference. This embodiment is preferable when ROM space is at a premium, since it eliminates a 256-byte table. However adding new byte codes to the set of supported byte codes has to be carefully thought out since the new byte codes have to fit in the implicit numbering scheme of the supported byte codes.

In another embodiment, the Card JVM 16 chooses not to perform any security checks in favor of Card JVM 16 execution speed. This is illustrated in the flowchart in FIG. 18. The flow chart in FIG. 18 is the same as that of FIG. 16 with the security checks removed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

The Card JVM 16 may enforce other security checks as well. If the byte code may reference a local variable, the Card JVM 16 checks if this reference is valid, throwing an error if it is not. If the reference is valid, the Card JVM 16 stores the type of the local variable for future checking. The VM stack 144a pointer is checked to see if it is still in a valid range. If not an exception is thrown. The byte code number is checked. If it is not supported, an exception is thrown.

US 7,818,727 B2

15

Finally, the byte code itself is dispatched **165d**. The byte codes translated by the Card JVM **16** are listed in Appendix C. The semantics of the byte codes are described in the aforementioned Java Virtual Machine Specification with regard to the state of the VM stack **144a** before and after the dispatch of the byte code. Note also that some byte codes (the byte codes, INVOKESTATIC, INVOKESPECIAL, INVOKENONVIRTUAL and INVOKEVIRTUAL) may cause reentry into the Card JVM **16**, requiring processing to begin at the entry of the subroutine **161**. FIG. **17** shows the flowchart of the byte code execution routine. The routine is given a byte code **171** to execute. The Card JVM **16** executes **172** the instructions required for the byte code. If in the course of executing the Card JVM **16** encounters a resource limitation **173**, it returns an error **156**. This error is returned to the terminal **16** by the Card JVM **16**. If the byte code executes successfully, it returns a success **175**.

After execution, the type of the result is used to set the VM stack **144a** state correctly **165e**, properly flagging the data types on the VM stack **144a**. The byte code information gathered previously **165b** from the byte code info table is used to set the state of the VM stack **144a** in accordance with the byte code that just executed.

In other embodiments, setting the output state of the VM stack **144a** with respect to the byte code executed is simplified if the byte code is renumbered. This is shown in Appendix I which is hereby incorporated by reference.

In yet another embodiment, the Card JVM **16** may bypass setting the output state of the VM stack **144a** in favor of Card JVM **16** execution speed. This option is not desirable from the point of view of security, unless it can be guaranteed that the byte codes are secure.

After the byte code has been executed, the byte code is retired **165f**. This involves popping arguments off the VM stack **144a**. Once byte code processing is completed, the loop **164** is repeated for the next byte code for the method.

Once the dispatch loop **164** terminates, the VM stack **144a** is emptied **166**. This prevents any object references filtering down to other Card JVM **16** invocations and breaking the Card JVM's **16** security. Termination **167** of the byte code dispatch loop **164** indicates that the Card JVM **16** has completed executing the requested method.

To isolate data and applications in the integrated circuit card **10** from each other, the integrated circuit card **10** relies on the firewall mechanism **149** provided by the Card JVM **16**. Because the Card JVM implements the standard pass **3** and pass **4** verifier checks, it detects any attempt by an application to reference the data or code space used by another application, and flag a security error **156**. For example, conventional low level applications can cast non-reference data types into references, thereby enabling access to unauthorized memory space, and violating security. With this invention, such an attempt by a card application **126z** to use a non-reference data type as a reference will trigger a security violation **156**. In conventional Java, this protected application environment is referred to as the sandbox application-interpretation environment.

However, these firewall facilities do not work independently. In fact, the facilities are overlapping and mutually reinforcing with conventional access control lists and encryption mechanisms shown in the following table:

16

	Access Control Lists	Virtual Machine	Encryption
Data Protection	access control before operation	access only to own namespace	data to another program encrypted
Program Protection	access control before execution	execution only on correct types	data encrypted in program's namespace
Communication Protection	access control on channels	channel controls in own namespace	only mutually authenticated parties can communicate

Taken together, these facilities isolate both data and applications on the integrated circuit card **10** and ensure that each card application **126** can access only the authorized resources of the integrated circuit card **10**.

Referring to FIG. **19**, card applications **126x**, **126y**, **126z** can be endowed with specific privileges when the card applications **126** execute. These privileges determine, for example, which data files the card applications **126** can access and what operations the card applications **126** can perform on the file system **147**. The privileges granted to the card applications **126** are normally set at the time that a particular card application **126z** is started by the user, typically from the terminal **14**.

The integrated circuit card **10** uses cryptographic identification verification methods to associate an identity **190** (e.g., identities **190a**, **190b** and **190c**) and hence, a set of privileges to the execution of the card application **126**. The association of the specific identity **190c** to the card application **126z** is made when the card application **126z** begins execution, thus creating a specific running application **200**, as shown in FIG. **20**. The identity **190** is a unique legible text string reliably associated with an identity token. The identity token (e.g., a personal identification number (PIN) or a RSA private key) is an encryption key.

Referring to FIG. **20**, in order to run a specific card application **126z**, the identity **190c** of the card application **126z** must be authenticated. The identity **190c** is authenticated by demonstrating knowledge of the identity token associated with the identity **190c**. Therefore, in order to run the card application **126z**, an agent (e.g., a card holder or another application wishing to run the application) must show that it possesses or knows the application's identity-defining encryption key.

One way to demonstrate possession of an encryption key is simply to expose the key itself. PIN verification is an example of this form of authentication. Another way to demonstrate the possession of an encryption key without actually exposing the key itself is to show the ability to encrypt or decrypt plain text with the key.

Thus, a specific running application **200** on the integrated circuit card **10** includes a card application **126z** plus an authenticated identity **190c**. No card application **126** can be run without both of these elements being in place. The card application **126z** defines data processing operations to be performed, and the authenticated identity **190c** determines on what computational objects those operations may be performed. For example, a specific application **126z** can only access identity **C**'s files **202** in the file system **147** associated with the specific identity **190c**, and the specific card applica-

US 7,818,727 B2

17

tion 126z cannot access other files 204 that are associated with identities other than the specific identity 190c.

The integrated circuit card 10 may take additional steps to ensure application and data isolation. The integrated circuit card 10 furnishes three software features sets: authenticated-identity access control lists; a Java-based virtual machine; and one-time session encryption keys to protect data files, application execution, and communication channels, respectively. Collectively, for one embodiment, these features sets provide the application data firewalls 149 for one embodiment. The following discusses each software feature set and then shows how the three sets work together to insure application and data isolation on the integrated circuit card 10.

An access control list (ACL) is associated with every computational object (e.g., a data file or a communication channel) on the integrated circuit card 10 that is to be protected, i.e., to which access is to be controlled. An entry on an ACL (for a particular computational object) is in a data format referred to as an e-tuple:

type:identity:permissions

The type field indicates the type of the following identity (in the identity field), e.g., a user (e.g., "John Smith"), or a group. The permissions field indicates a list of operations (e.g., read, append and update) that can be performed by the identity on the computational object.

As an example, for a data file that has the ACL entry:
USER:AcmeAirlines:RAU,

any application whose identity is "AcmeAirlines" can read ("R"), append ("A") and update ("U") the data file. In addition, the ACL may be used selectively to permit the creation and deletion of data files. Furthermore, the ACL may be used selectively to permit execution of an application.

Whenever a computational object is accessed by a running application 200, the access is intercepted by the Card JVM 16 and passed to the card operating system 122, which determines if there is an ACL associated with the object. If there is an associated ACL, then the identity 190c associated with the running application 200 is matched on the ACL. If the identity is not found or if the identity is not permitted for the type of access that is being requested, then the access is denied. Otherwise, the access is allowed to proceed.

Referring to FIG. 13, to prevent the potential problems due to the single data path between the integrated circuit card 10 and the terminal 14, communication channel isolation is accomplished by including in the identity authentication process the exchange of a one-time session key 209 between the a card application 126z and the terminal application 136. The key 209 is then used to encrypt subsequent traffic between the authenticating terminal application 136 and the authenticated card application 126z. Given the one-time session key 209, a rogue terminal application can neither "listen in" on an authenticated communication between the terminal 14 and the integrated circuit card 10, nor can the rogue terminal application "spoo" the card application into performing unauthorized operations on its behalf.

Encryption and decryption of card/terminal traffic can be handled either by the card operating system 122 or by the card application itself 126z. In the former case, the communication with the terminal 14 is being encrypted transparently to the application, and message traffic arrives decrypted in the data space of the application. In the latter case, the card application 126z elects to perform encryption and decryption to provide an extra layer of security since the application could encrypt data as soon as it was created and would decrypt data only when it was about to be used. Otherwise, the data would remain encrypted with the session key 209.

18

Thus, the application firewall includes three mutually reinforcing software sets. Data files are protected by authenticated-identity access control lists. Application execution spaces are protected by the Card JVM 16. Communication channels are protected with one-time session encryption keys 209.

In other embodiments, the above-described techniques are used with a microcontroller (such as the processor 12) may control devices (e.g., part of an automobile engine) other than an integrated circuit card. In these applications, the microcontroller provides a small platform (i.e., a central processing unit, and a memory, both of which are located on a semiconductor substrate) for storing and executing high level programming languages. Most existing devices and new designs that utilize a microcontroller could use this invention to provide the ability to program the microcontroller using a high level language, and application of this invention to such devices is specifically included.

The term application includes any program, such as Java applications, Java applets, Java aglets, Java servlets, Java commllets, Java components, and other non-Java programs that can result in class files as described below.

Class files may have a source other than Java program files. Several programming languages other than Java also have compilers or assemblers for generating class files from their respective source files. For example, the programming language Eiffel can be used to generate class files using Pirmin Kalberer's "J-Eiffel", an Eiffel compiler with JVM byte code generation (web site: <http://www.spin.ch/~kalberer/jive/index.htm>). An Ada 95 to Java byte code translator is described in the following reference (incorporated herein by reference): Taft, S. Tucker, "Programming the Internet in Ada 95", proceedings of Ada Europe '96, 1996. Jasmin is a Java byte code assembler that can be used to generate class files, as described in the following reference (incorporated herein by reference) Meyer, Jon and Troy Downing, "Java Virtual Machine", O'Reilly, 1997. Regardless of the source of the class files, the above description applies to languages other than Java to generate codes to be interpreted.

FIG. 21 shows an integrated circuit card, or smart card, which includes a microcontroller 210 that is mounted to a plastic card 212. The plastic card 212 has approximately the same form factor as a typical credit card. The communicator 12a can use a contact pad 214 to establish a communication channel, or the communicator 12a can use a wireless communication system.

In other embodiments, a microcontroller 210 is mounted into a mobile or fixed telephone 220, effectively adding smart card capabilities to the telephone, as shown in FIG. 22. In these embodiments, the microcontroller 210 is mounted on a module (such as a Subscriber Identity Module (SIM)), for insertion and removal from the telephone 220.

In other embodiments, a microcontroller 210 is added to a key ring 230 as shown in FIG. 23. This can be used to secure access to an automobile that is equipped to recognize the identity associated with the microcontroller 210 on the key ring 230.

Jewelry such as a watch or ring 240 can also house a microcontroller 210 in an ergonomic manner, as shown in FIG. 24. Such embodiments typically use a wireless communication system for establishing a communication channel, and are a convenient way to implement access control with a minimum of hassle to the user.

FIG. 25 illustrates a microcontroller 210 mounted in an electrical subsystem 252 of an automobile 254. In this embodiment, the microcontroller is used for a variety of purposes, such as to controlling access to the automobile, (e.g.

US 7,818,727 B2

19

checking identity or sobriety before enabling the ignition system of the automobile), paying tolls via wireless communication, or interfacing with a global positioning system (GPS) to track the location of the automobile, to name a few.

While specific embodiments of the present invention have been described, various modifications and substitutions will become apparent to one skilled in the art by this disclosure. Such modifications and substitutions are within the scope of the present invention, and are intended to be covered by the appended claims.

We claim:

1. A programmable device comprising:
a memory, a non-volatile memory and a processor;
the non-volatile memory storing:
an application for the programmable device obtained from an application having a class file format wherein the application for the programmable device is obtained from the application having a class file format by first compiling the application having a class file format into a compiled form and then converting the compiled form into a converted form, and
an interpreter configured to interpret applications in the converted form; and
the processor coupled to the memory, the processor configured to use the interpreter to interpret the application for the programmable device for execution.

2. The programmable device of claim 1, wherein the class file format comprises a Java class file format.

3. A programmable device comprising:
a memory, and
a processor;
the memory comprising:
an interpreter ; and
at least one application loaded in the memory to be interpreted by the interpreter, wherein the at least one application is generated by a programming environment comprising:
a) a compiler for compiling application source programs written in high level language source code form into a compiled form, and
b) a converter for post processing the compiled form into a minimized form suitable for interpretation within the set of resource constraints by the interpreter.

4. The programmable device of claim 3, wherein the compiled form includes attributes, and the converter comprises a means for including attributes required by the interpreter while not including the attributes not required by the interpreter.

5. The programmable device of claim 3 wherein the compiled form is in a standard Java class file format and the converter accepts as input the compiled form in the standard Java class file format and produces output in a form suitable for interpretation by the interpreter.

6. The programmable device of claim 3 wherein the compiled form includes associating an identifying string for objects, classes, fields, or methods, and the converter comprises a means for mapping such strings to unique identifiers.

7. The programmable device of claim 6 wherein each unique identifier is an integer.

8. The programmable device of claim 6 wherein the mapping of strings to unique identifiers is stored in a string to identifier map file.

9. The programmable device of claim 3 where in the high level language supports a first set of features and a first set of data types and the interpreter supports a subset of the first set of features and a subset of the first set of data types, and wherein the converter verifies that the compiled form only

20

contains features in the subset of the first set of features and only contains data types in the subset of the first set of data types.

10. The programmable device of claim 6 wherein the compiled form is in a byte code format and the converter comprises means for translating from the byte codes in the compiled form to byte codes in a format suitable for interpretation by the interpreter by:

recording all jumps and their destinations in the original byte codes:

converting the compiled form using at least one step in a process including the steps:

a) converting specific byte codes into equivalent generic byte codes or vice-versa;

b) modifying byte code operands from references using identifying strings to references using unique identifiers; and

c) renumbering byte codes in the compiled form to equivalent byte codes in the format suitable for interpretation; and

relinking jumps for which destination address is effected by conversion step a), b), or c).

11. The programmable device of claim 3 wherein the application program is compiled into a compiled form for which resources required to execute or interpret the compiled form exceed those available on the microcontroller.

12. The programmable device of claim 3 wherein the compiled form is designed for portability on different computer platforms.

13. The programmable device of claim 3 wherein the interpreter is further configured to determine, during an interpretation of an application, whether the application meets a security criteria selected from a set of rules containing at least one rule selected from the set:

not allowing the application access to unauthorized portions of memory,

not allowing the application access to unauthorized microcontroller resources,

wherein the application is composed of byte codes and checking a plurality of byte codes at least once prior to execution to verify that execution of the byte codes does not violate a security constraint.

14. The programmable device of claim 3 wherein at least one application program is generated by a process including the steps of:

prior to loading the application verifying that the application does not violate any security constraints; and
loading the application in a secure manner.

15. The programmable device of claim 14 wherein the step of loading in a secure manner comprises the step of: verifying that the loading identity has permission to load applications onto the microcontroller.

16. The programmable device of claim 14 wherein the step of loading in a secure manner comprises the step of: encrypting the application to be loaded using a loading key.

17. A method of programming a programmable device having a memory and a processor operating according to a set of resource constraints, the method comprising the steps of: inputting an application program in a first programming language;

compiling the application program in the first programming language into a first intermediate code associated with the first programming language, wherein the first intermediate code being interpretable by at least one first intermediate code virtual machine;

converting the first intermediate code into a second intermediate code by performing at least one operation to

US 7,818,727 B2

21

replace a construct in the first intermediate code with an equivalent construct in the second intermediate code; wherein the second intermediate code is interpretable within the set of resource constraints by a second intermediate code virtual machine; and
loading the second intermediate code into the memory of the programmable device.

18. The method of programming a programmable device of claim **17** wherein the step of converting further comprises: associating an identifying string for objects, classes, fields, or methods; and mapping such strings to unique identifiers.

19. The method of claim **18** wherein the step of mapping comprises the step of mapping strings to integers.

20. The method of claim **17** wherein the step of converting comprises the steps of:

22

recording all jumps and their destinations in the original byte codes;

converting the compiled form using at least one step in a process including the steps:

a) converting specific byte codes into equivalent generic byte codes or vice-versa;

b) modifying byte code operands from references using identifying strings to references using unique identifiers;

c) renumbering byte codes in a compiled format to equivalent byte codes in a format suitable for interpretation; and

relinking jumps for which destination address is effected by conversion step a), b), or c).

* * * * *

CIVIL COVER SHEET

The JS 44 civil cover sheet and the information contained herein neither replace nor supplement the filing and service of pleadings or other papers as required by law, except as provided by local rules of court. This form, approved by the Judicial Conference of the United States in September 1974, is required for the use of the Clerk of Court for the purpose of initiating the civil docket sheet. (SEE INSTRUCTIONS ON THE REVERSE OF THE FORM.)

I. (a) PLAINTIFFS

Gemalto S.A.

DEFENDANTS

See Attachment A

(b) County of Residence of First Listed Plaintiff Meudon Cedex, France (EXCEPT IN U.S. PLAINTIFF CASES)

County of Residence of First Listed Defendant Taiwan, R.O.C. (IN U.S. PLAINTIFF CASES ONLY)

NOTE: IN LAND CONDEMNATION CASES, USE THE LOCATION OF THE LAND INVOLVED.

Attorneys (If Known)

(c) Attorney's (Firm Name, Address, and Telephone Number) Sam Baxter, McKool Smith, P.C., 104 E. Houston Street, Suite 300, Marshall, Texas 75670 -- (903) 923-9000

II. BASIS OF JURISDICTION (Place an "X" in One Box Only)

- 1 U.S. Government Plaintiff, 2 U.S. Government Defendant, 3 Federal Question (U.S. Government Not a Party), 4 Diversity (Indicate Citizenship of Parties in Item III)

III. CITIZENSHIP OF PRINCIPAL PARTIES (Place an "X" in One Box for Plaintiff and One Box for Defendant)

Table with columns for Plaintiff (PTF) and Defendant (DEF) citizenship: Citizen of This State, Citizen of Another State, Citizen or Subject of a Foreign Country, Incorporated or Principal Place of Business In This State, Incorporated and Principal Place of Business In Another State, Foreign Nation.

IV. NATURE OF SUIT (Place an "X" in One Box Only)

Large table with categories: CONTRACT, REAL PROPERTY, TORTS, CIVIL RIGHTS, PRISONER PETITIONS, FORFEITURE/PENALTY, LABOR, IMMIGRATION, BANKRUPTCY, SOCIAL SECURITY, FEDERAL TAX SUITS, OTHER STATUTES.

V. ORIGIN

(Place an "X" in One Box Only)

- 1 Original Proceeding, 2 Removed from State Court, 3 Remanded from Appellate Court, 4 Reinstated or Reopened, 5 Transferred from another district (specify), 6 Multidistrict Litigation, 7 Appeal to District Judge from Magistrate Judgment

VI. CAUSE OF ACTION

Cite the U.S. Civil Statute under which you are filing (Do not cite jurisdictional statutes unless diversity):

35 USC Sec. 101 et seq.

Brief description of cause:

Patent Infringement

VII. REQUESTED IN COMPLAINT:

CHECK IF THIS IS A CLASS ACTION UNDER F.R.C.P. 23, DEMAND \$, CHECK YES only if demanded in complaint: JURY DEMAND: Yes No

VIII. RELATED CASE(S) IF ANY

(See instructions):

JUDGE

DOCKET NUMBER

DATE

SIGNATURE OF ATTORNEY OF RECORD

10/22/2010

/s/ Sam Baxter

FOR OFFICE USE ONLY

RECEIPT # AMOUNT APPLYING IFP JUDGE MAG. JUDGE

Attachment A

HTC CORPORATION
HTC AMERICA INC.
EXEDEA, INC.
SAMSUNG ELECTRONICS CO., LTD.
SAMSUNG TELECOMMUNICATIONS AMERICA LLC
MOTOROLA, INC.
GOOGLE INC.